




C TP-106

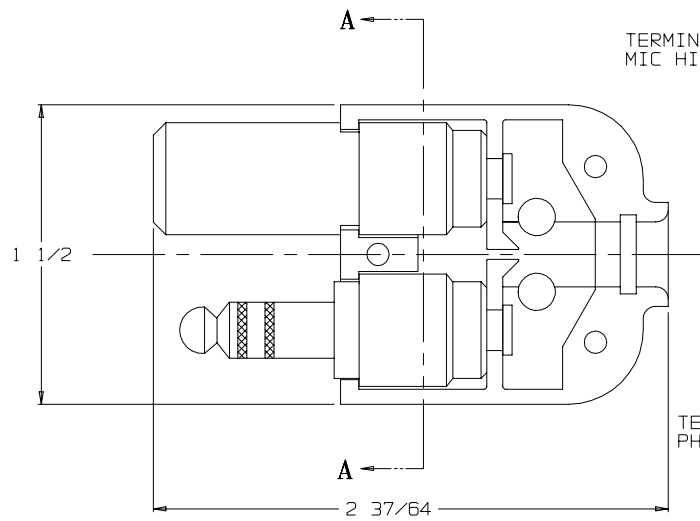


VIEW WITH HALF SHELL REMOVED

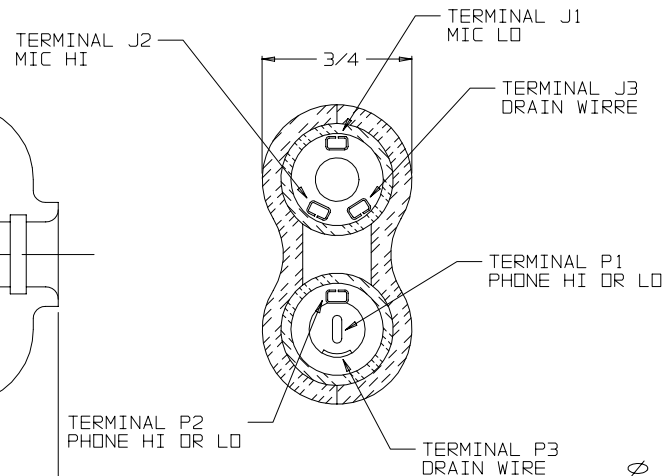


SECTION A-A
SEE NOTE 2

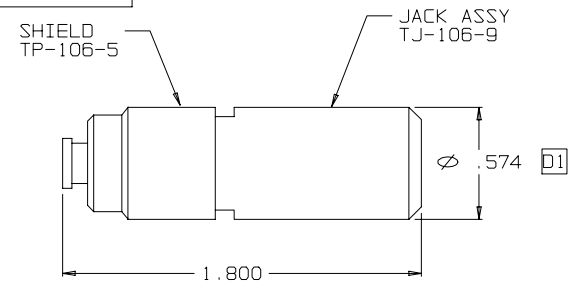


F2 TJ-106-21 JACK & SHIELD ASSEMBLY

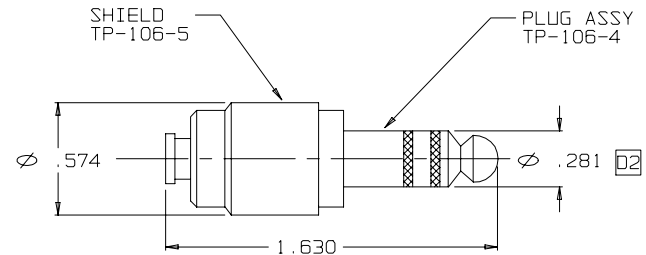


F2 TP-106-10 PLUG & SHIELD ASSEMBLY

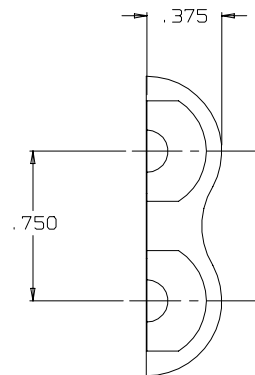



SHELL, HALF
TP-106-6
(2 REQ'D)



RING, STRAIN RELIEF
TJ-106-10A
(1 REQ'D)



SECTION B-B
STRAIN RELIEF
CLAMP TJ-106-10A
AFTER CRIMPING
SCALE: 4:1

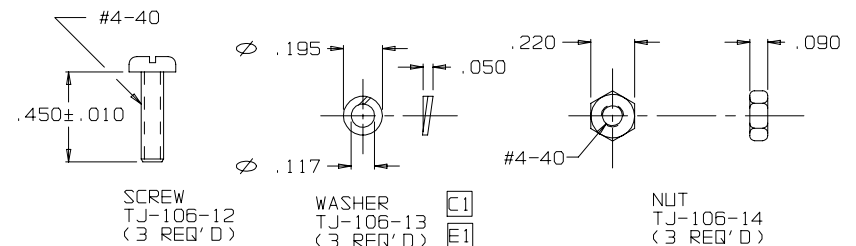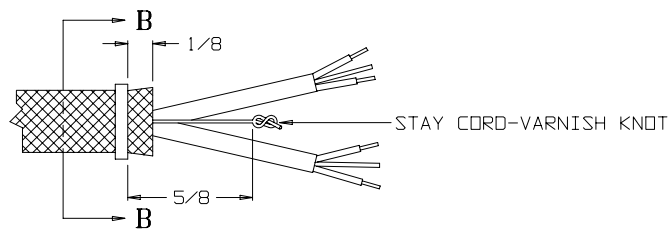

- F1 NOTES:
- 1) ALL NICKEL PLATING SHALL BE OF SUFFICIENT THICKNESS TO PROVIDE CORROSION PROTECTION.
(REF QQ-N-290-A, CLASS 1)
 - 2) WIRING CALL OUTS ARE FOR REF ONLY

THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION OF NEXUS, INCORPORATED AND SUCH INFORMATION MAY NOT BE DISCLOSED TO OTHERS FOR ANY PURPOSE OR USED FOR ANY PURPOSE WITHOUT THE WRITTEN CONSENT OF NEXUS.

F	2) ADDED P/N'S 1) ADDED NOTE 1&2	240	8/13/96	LS	DWN. BY	EC	DATE	4/5/93	MATERIAL	SEE FIELD OF DRAWING
E	TJ-106-13 WAS TJS-102-10	016	6/27/96	JRJ	CHECKED BY	RVC	DATE	6/5/96	FINISH	N/A
D	2) .564 WAS .574 1) .574 WAS .547		4/17/96	RDJ	APPR. BY	L SMITH	DATE	9/13/96	WEIGHT	SCALE 2:1
C	WASHER P/N WAS TJ-106-13		4/8/96	RDJ	UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES				TITLE	TP-106 PLUG-TELEPHONE-BIAXIAL SHIELDED (6) CONDUCTOR
B	ADDED SECTION B-B		6/5/96	RDJ	FRACTIONS DECIMALS ANGLES				DO NOT SCALE DWG.	SHEET 1 OF 1
A	REDRAWN WAS D SIZE		3/7/96	RDJ						
LET.	REVISION	CN #	DATE	CHK.	±/± 1/64	±/± .005	—			

NEXUS
STAMFORD, CONN

SIZE DWG. NO.
C TP-106