


## High voltage fast-switching NPN power transistor

### Features

- High voltage capability
- Low spread of dynamic parameters
- Minimum lot-to-lot spread for reliable operation
- Very high switching speed

### Applications


- Compact fluorescent lamp (CFL)
- Switch mode power supplies (AC-DC converters)

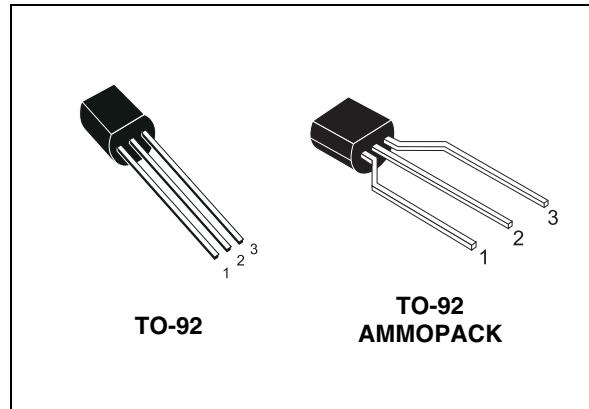

### Description

The device is manufactured using high voltage multi-epitaxial planar technology for high switching speeds and medium voltage capability. It uses a cellular emitter structure with planar edge termination to enhance switching speeds while maintaining the wide RBSOA.

**Figure 1. Internal schematic diagram**

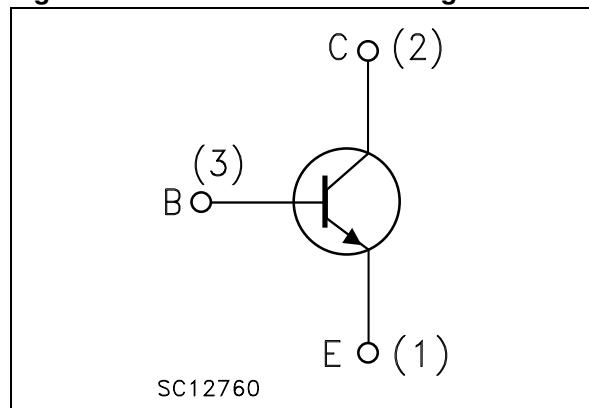

**Table 1. Device summary<sup>(1)</sup>**

Order code	Marking	Package	Packaging
STX13005	X13005	TO-92	Bulk
STX13005G	X13005G		
STX13005-AP	X13005		Ammopack
STX13005G-AP	X13005G		

1. The letter "G" in the order code suffix identifies the product as ECOPACK®2 grade. Please see [Section 4](#) for details.

## Contents

<b>1</b>	<b>Electrical ratings</b>	<b>3</b>
<b>2</b>	<b>Electrical characteristics</b>	<b>4</b>
2.1	Electrical characteristics (curves)	5
<b>3</b>	<b>Test circuits</b>	<b>8</b>
<b>4</b>	<b>Package mechanical data</b>	<b>9</b>
<b>5</b>	<b>Revision history</b>	<b>12</b>

# 1 Electrical ratings

**Table 2. Absolute maximum ratings**

Symbol	Parameter	Value	Unit
$V_{CES}$	Collector-emitter voltage ( $V_{BE} = 0$ )	700	V
$V_{CEO}$	Collector-emitter voltage ( $I_B = 0$ )	400	V
$V_{EBO}$	Emitter-base voltage ( $I_C = 0$ ; $I_B = 1.5$ A; $t_p < 10$ ms)	$V_{(BR)EBO}$	V
$I_C$	Collector current	3	A
$I_{CM}$	Collector peak current ( $t_p < 5$ ms)	6	A
$I_B$	Base current	1.5	A
$I_{BM}$	Base peak current ( $t_p < 5$ ms)	3	A
$P_{tot}$	Total dissipation at $T_c = 25^\circ\text{C}$	2.8	W
$T_{stg}$	Storage temperature	-65 to 150	$^\circ\text{C}$
$T_J$	Max. operating junction temperature	150	$^\circ\text{C}$

**Table 3. Thermal data**

Symbol	Parameter	Value	Unit
$R_{thj-c}$	Thermal resistance junction-case	45	$^\circ\text{C}/\text{W}$

## 2 Electrical characteristics

( $T_{case} = 25^\circ\text{C}$  unless otherwise specified)

**Table 4. Electrical characteristics**

Symbol	Parameter	Test conditions	Min.	Typ.	Max.	Unit
$I_{CES}$	Collector cut-off current ( $V_{BE} = 0$ )	$V_{CE} = 700 \text{ V}$ $V_{CE} = 700 \text{ V} \quad T_C = 125^\circ\text{C}$			1 5	mA mA
$I_{CEO}$	Collector-cut-off current ( $I_B = 0$ )	$V_{CE} = 400 \text{ V}$			1	mA
$V_{(BR)EBO}$	Emitter base breakdown voltage ( $I_C = 0$ )	$I_E = 10 \text{ mA}$	9		18	V
$V_{CEO(sus)}^{(1)}$	Collector-emitter sustaining voltage ( $I_B = 0$ )	$I_C = 10 \text{ mA}$	400			V
$V_{CE(sat)}^{(1)}$	Collector-emitter saturation voltage	$I_C = 1 \text{ A} \quad I_B = 200 \text{ mA}$			0.5	V
		$I_C = 2 \text{ A} \quad I_B = 500 \text{ mA}$			0.6	V
		$I_C = 3 \text{ A} \quad I_B = 750 \text{ mA}$			5	V
$V_{BE(sat)}^{(1)}$	Base-emitter saturation voltage	$I_C = 1 \text{ A} \quad I_B = 200 \text{ mA}$			1.2	V
		$I_C = 2 \text{ A} \quad I_B = 500 \text{ mA}$			1.6	V
$h_{FE}^{(1)}$	DC current gain	$I_C = 1 \text{ A} \quad V_{CE} = 5 \text{ V}$	10		30	
		$I_C = 2 \text{ A} \quad V_{CE} = 5 \text{ V}$	8		24	
$t_s$	Resistive load	$I_C = 2 \text{ A} \quad V_{CC} = 125 \text{ V}$				
	Storage time	$I_{B1} = -I_{B2} = 400 \text{ mA}$		1.65		$\mu\text{s}$
$t_f$	Fall time	$t_p = 30 \mu\text{s}$		260		ns
$t_s$	Inductive load	$I_C = 1 \text{ A} \quad V_{clamp} = 300 \text{ V}$				
	Storage time	$I_{B1} = 200 \text{ mA} \quad V_{BE(off)} = -5 \text{ V}$		0.8		$\mu\text{s}$
$t_f$	Fall time	$L = 50 \text{ mH} \quad R_{BB} = 0$		150		ns

1. Pulse test: pulse duration  $\leq 300 \mu\text{s}$ , duty cycle  $\leq 2\%$

## 2.1 Electrical characteristics (curves)

Figure 2. Safe operating area @ $T_C = 25^\circ\text{C}$

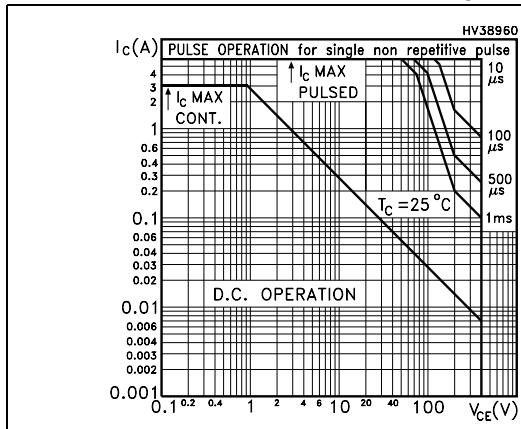


Figure 3. Safe operating area @ $T_C = 135^\circ\text{C}$

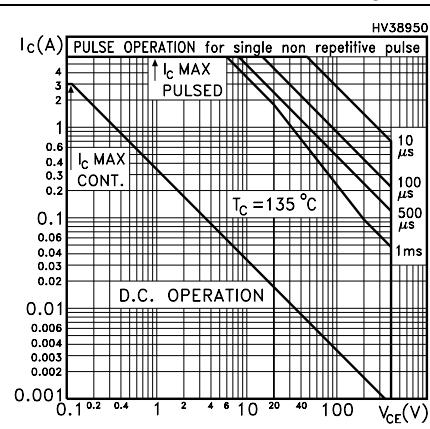


Figure 4. Derating curve

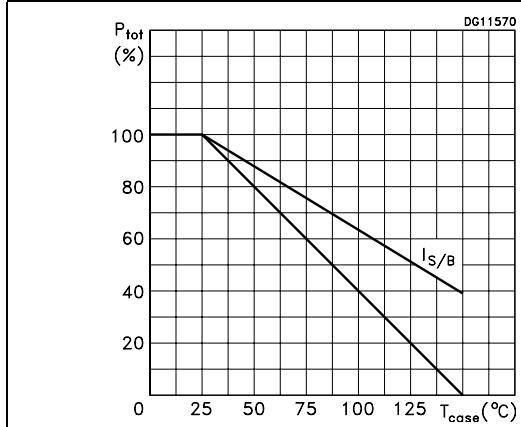


Figure 5. Output characteristics

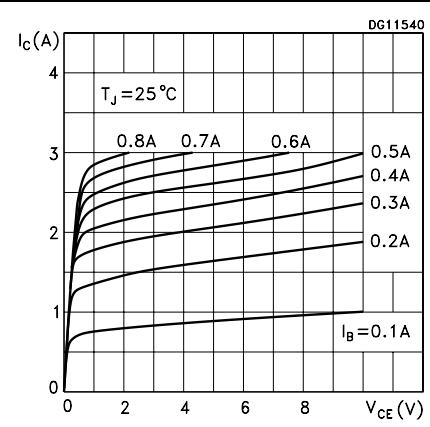


Figure 6. DC current gain @ $V_{CE} = 1\text{ V}$






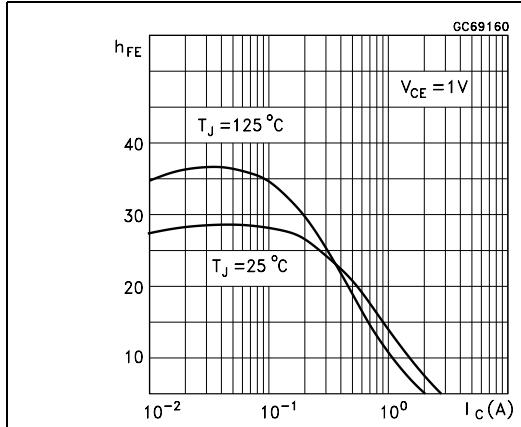


Figure 7. DC current gain @ $V_{CE} = 5\text{ V}$

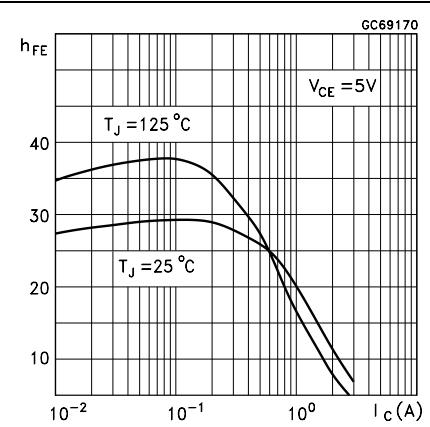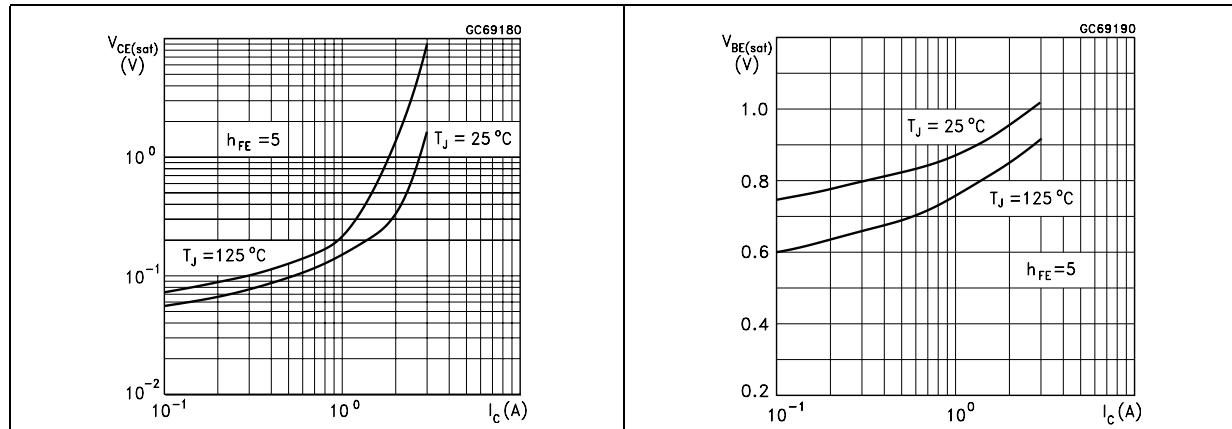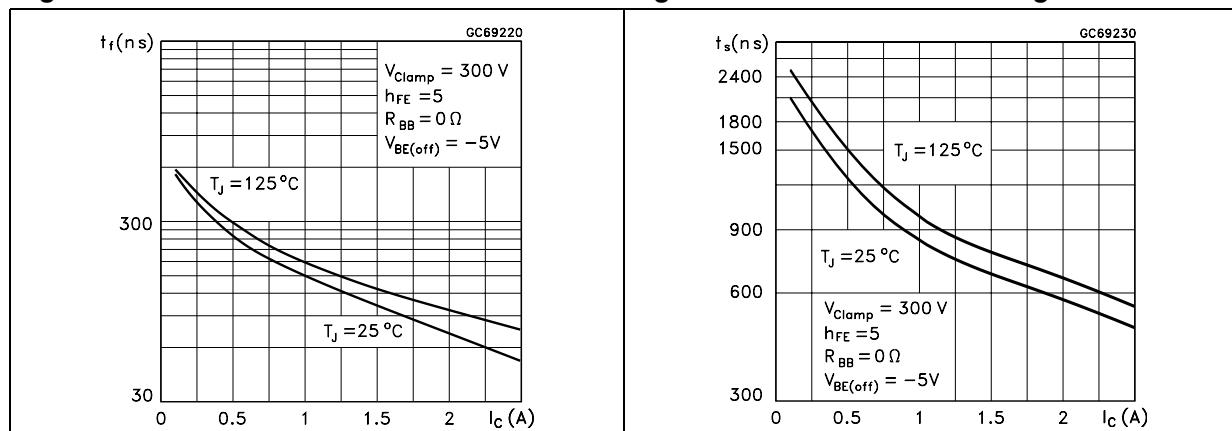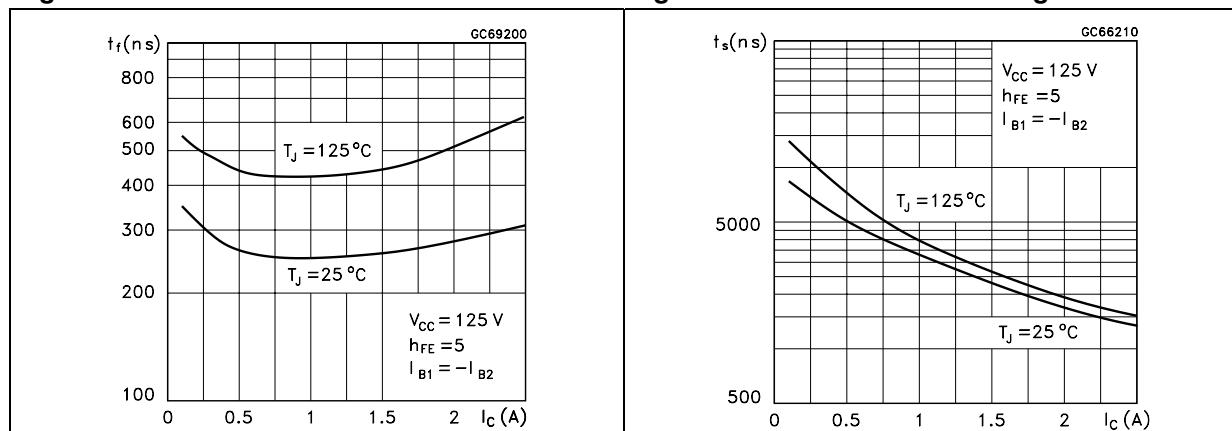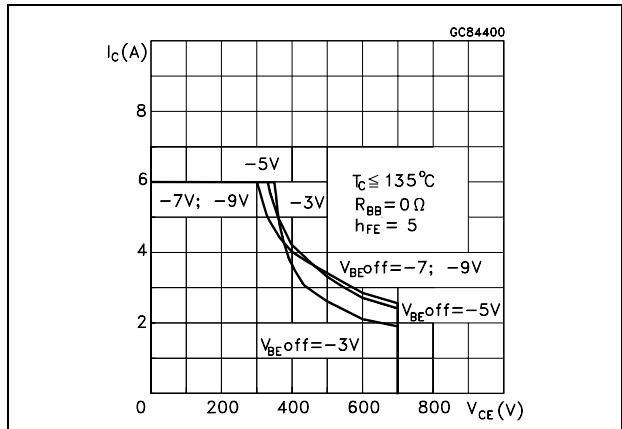


**Figure 8. Collector-emitter saturation voltage** **Figure 9. Base-emitter saturation voltage****Figure 10. Inductive load fall time****Figure 12. Resistive load fall time**

**Figure 14. Reverse biased SOA**


## 3 Test circuits

**Figure 15. Inductive load switching test circuit**

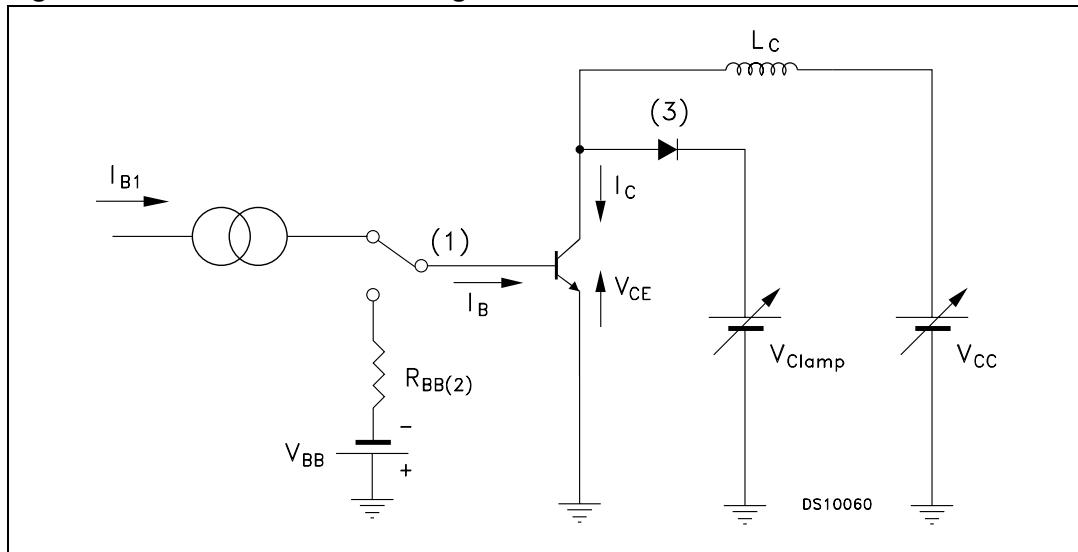

- 1) Fast electronic switch
- 2) Non-inductive resistor
- 3) Fast recovery rectifier

**Figure 16. Resistive load switching test circuit**

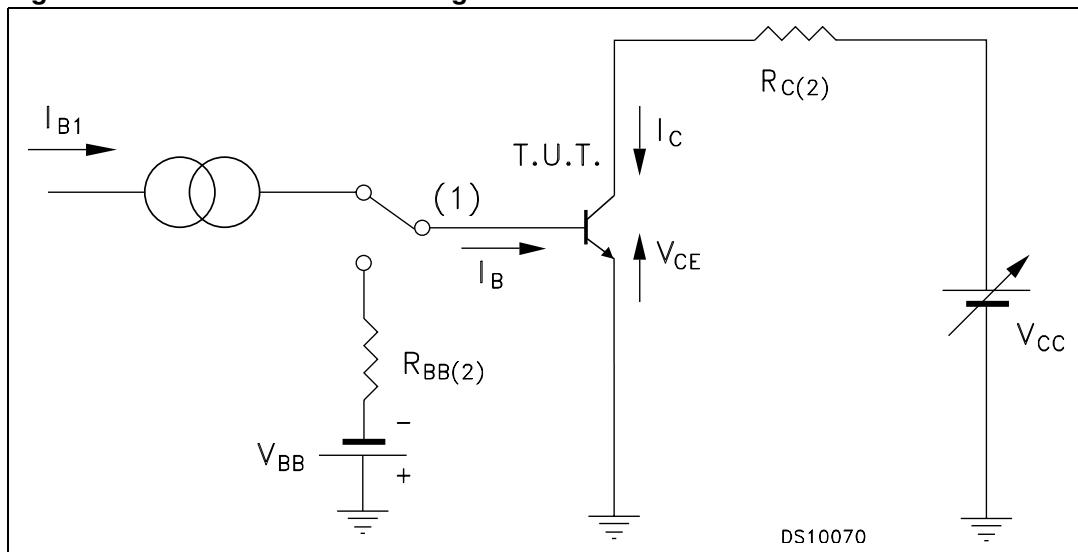

- 1) Fast electronic switch
- 2) Non-inductive resistor


## 4 Package mechanical data

In order to meet environmental requirements, ST offers these devices in different grades of ECOPACK® packages, depending on their level of environmental compliance. ECOPACK® specifications, grade definitions and product status are available at: [www.st.com](http://www.st.com). ECOPACK® is an ST trademark.

Table 5. TO-92 package mechanical data


Dim.	mm		
	Min.	Typ.	Max.
A	4.32		4.95
b	0.36		0.51
D	4.45		4.95
E	3.30		3.94
e	2.41		2.67
e1	1.14		1.40
L	12.70		15.49
R	2.16		2.41
S1	0.92		1.52
W	0.41		0.56
V		5°	

Figure 17. TO-92 package drawing

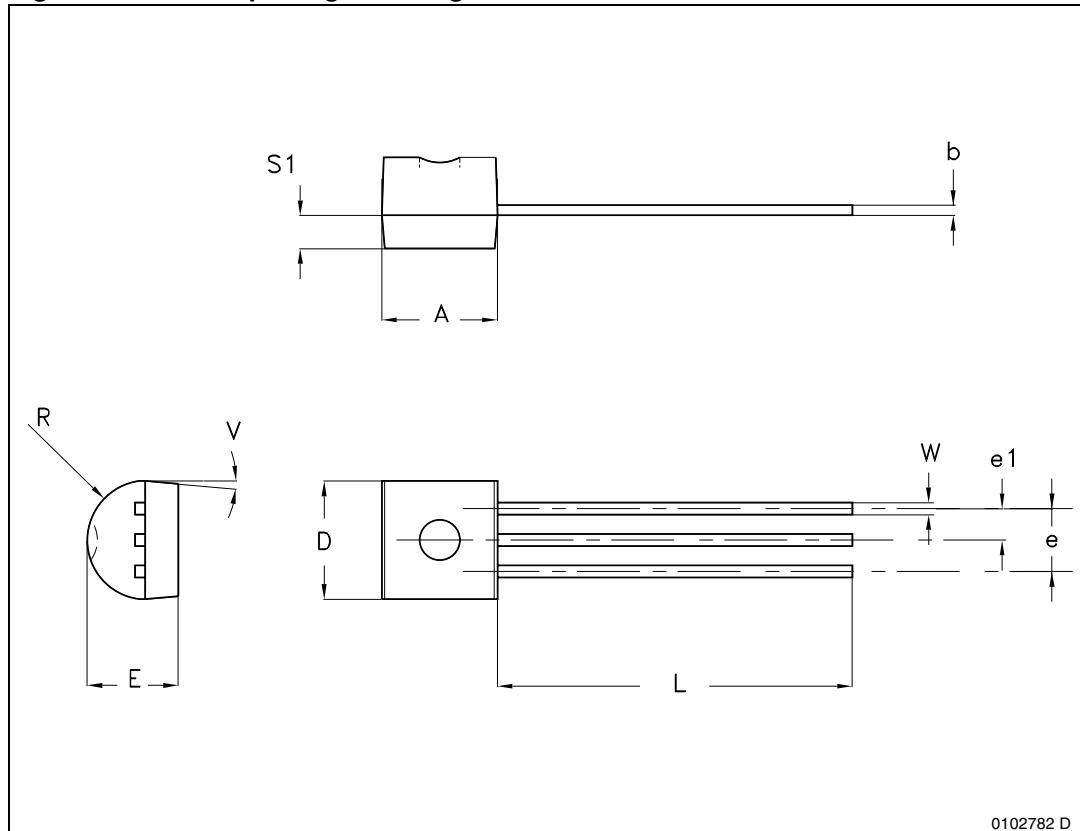

## TO-92 ammopack shipment (suffix"-AP") mechanical data

Dim.	mm		
	Min	Typ	Max
A1			4.80
T			3.80
T1			1.60
T2			2.30
d			0.48
P0	12.50	12.70	12.90
P2	5.65	6.35	7.05
F1,F2	2.44	2.54	2.94
F3	4.98	5.08	5.48
delta H	-2.00		2.00
W	17.50	18.00	19.00
W0	5.70	6.00	6.30
W1	8.50	9.00	9.25
W2			0.50
H	18.50		20.50
H3	0.5	1	1.5
H0	15.50	16.00	16.50
H1			25.00
D0	3.80	4.00	4.20
t			0.90
L			11.00
I1	3.00		
delta P	-1.00		1.00

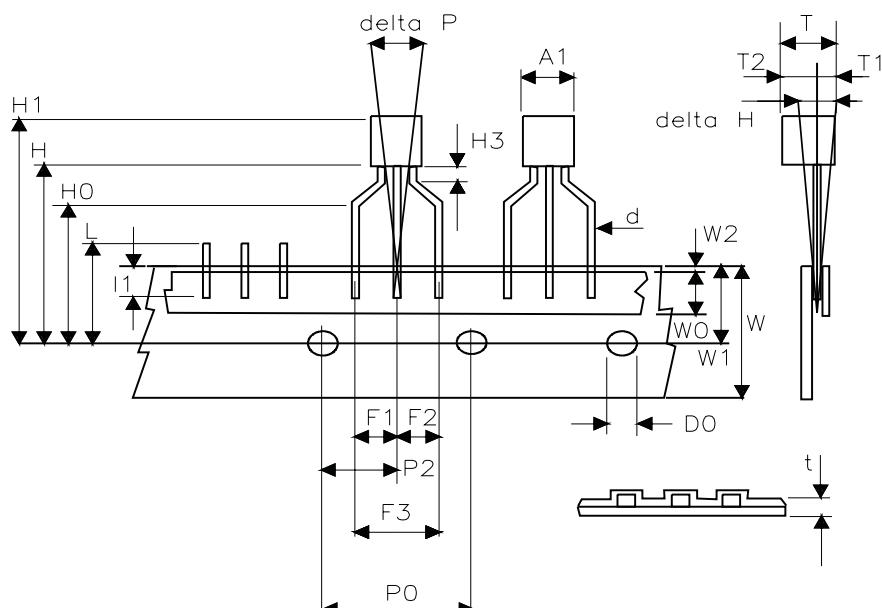

## 5 Revision history

**Table 6. Document revision history**

Date	Revision	Changes
01-Jul-2004	1	First release.
11-Feb-2005	2	New table on page 1
02-Aug-2007	3	New <a href="#">Figure 3</a> and updated <a href="#">Figure 14</a>
28-Sep-2007	4	Updated <a href="#">Figure 2</a> and <a href="#">Figure 3</a>
16-Dec-2008	5	Added ECOPACK®2 grade products with suffix "G"
11-Aug-2009	6	Updated TO-92 mechanical data and <a href="#">Figure 1: Internal schematic diagram</a>

**Please Read Carefully:**

Information in this document is provided solely in connection with ST products. STMicroelectronics NV and its subsidiaries ("ST") reserve the right to make changes, corrections, modifications or improvements, to this document, and the products and services described herein at any time, without notice.

All ST products are sold pursuant to ST's terms and conditions of sale.

Purchasers are solely responsible for the choice, selection and use of the ST products and services described herein, and ST assumes no liability whatsoever relating to the choice, selection or use of the ST products and services described herein.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted under this document. If any part of this document refers to any third party products or services it shall not be deemed a license grant by ST for the use of such third party products or services, or any intellectual property contained therein or considered as a warranty covering the use in any manner whatsoever of such third party products or services or any intellectual property contained therein.

**UNLESS OTHERWISE SET FORTH IN ST'S TERMS AND CONDITIONS OF SALE ST DISCLAIMS ANY EXPRESS OR IMPLIED WARRANTY WITH RESPECT TO THE USE AND/OR SALE OF ST PRODUCTS INCLUDING WITHOUT LIMITATION IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE (AND THEIR EQUIVALENTS UNDER THE LAWS OF ANY JURISDICTION), OR INFRINGEMENT OF ANY PATENT, COPYRIGHT OR OTHER INTELLECTUAL PROPERTY RIGHT.**

**UNLESS EXPRESSLY APPROVED IN WRITING BY AN AUTHORIZED ST REPRESENTATIVE, ST PRODUCTS ARE NOT RECOMMENDED, AUTHORIZED OR WARRANTED FOR USE IN MILITARY, AIR CRAFT, SPACE, LIFE SAVING, OR LIFE SUSTAINING APPLICATIONS, NOR IN PRODUCTS OR SYSTEMS WHERE FAILURE OR MALFUNCTION MAY RESULT IN PERSONAL INJURY, DEATH, OR SEVERE PROPERTY OR ENVIRONMENTAL DAMAGE. ST PRODUCTS WHICH ARE NOT SPECIFIED AS "AUTOMOTIVE GRADE" MAY ONLY BE USED IN AUTOMOTIVE APPLICATIONS AT USER'S OWN RISK.**

Resale of ST products with provisions different from the statements and/or technical features set forth in this document shall immediately void any warranty granted by ST for the ST product or service described herein and shall not create or extend in any manner whatsoever, any liability of ST.

ST and the ST logo are trademarks or registered trademarks of ST in various countries.

Information in this document supersedes and replaces all information previously supplied.

The ST logo is a registered trademark of STMicroelectronics. All other names are the property of their respective owners.

© 2009 STMicroelectronics - All rights reserved

STMicroelectronics group of companies

Australia - Belgium - Brazil - Canada - China - Czech Republic - Finland - France - Germany - Hong Kong - India - Israel - Italy - Japan - Malaysia - Malta - Morocco - Philippines - Singapore - Spain - Sweden - Switzerland - United Kingdom - United States of America

[www.st.com](http://www.st.com)



# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[STMicroelectronics](#):

[STX13005G-AP](#) [STX13005G](#)