

K-No.: 25606

Powerline transformer

Date: 22.07.2014

Customer:

Customers part no.:

Page 1 of 3

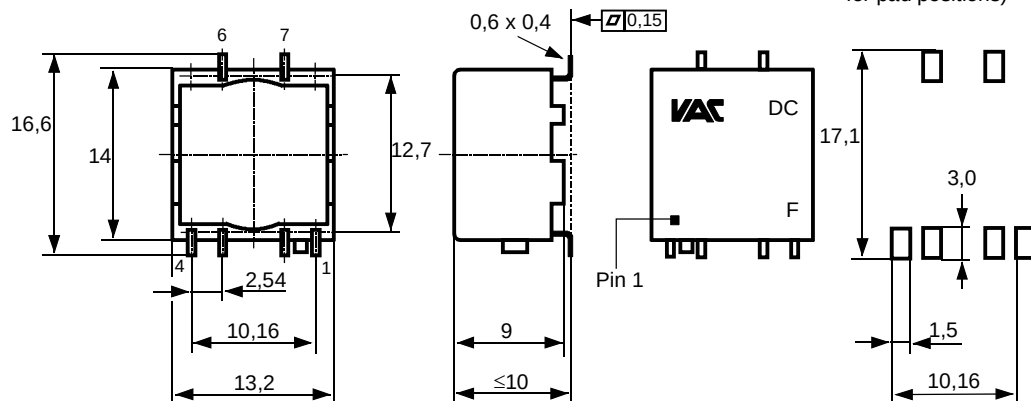
Mechanical outline (mm): (General Tolerances DIN ISO 2768-c)

 Toleranz der Stiftabstände $\pm 0,2\text{mm}$
 (Tolerances grid distance)


 DC = Date Code
 F = Factory

 Vorschlag zur Anordnung der
 Anschlussflächen
 (Example
 for pad positions)

 Connections:
 No. 1, 2, 3, 4, 6, 7

 Removed pins:
 No. 5, 8

 Beschriftung:
 marking

VAC DC
 5032X102
 F

Schematic diagram:

Operational data/characteristic data (nominal values):
 $f = 10 \dots 1000 \text{ kHz}$
 $I_{\text{RMS}} < 100 \text{ mA (50/60Hz)}$
 $R_{\text{Cu1}} \leq 135 \text{ m}\Omega$; $R_{\text{Cu2}} \leq 135 \text{ m}\Omega$, $R_{\text{Cu3}} \leq 230 \text{ m}\Omega$

 Operating temperature: $-40 \text{ }^{\circ}\text{C} \dots +120 \text{ }^{\circ}\text{C}$

 Storage temperature: $-40 \text{ }^{\circ}\text{C} \dots +120 \text{ }^{\circ}\text{C}$
Inspection: (V: 100%-Test; AQL...: DIN ISO 2859-Teil1)

- | | | | | | |
|----|------------|----------|--|------------------------|---|
| 1) | (V) | M3014: | $U_{\text{t,r.m.s.}} = 6,5 \text{ kV}$,
$U_{\text{t,r.m.s.}} = 0,5 \text{ kV}$, | 2 s,
2 s, | N3 vs N1+2
N1 vs N2 |
| 2) | (AQL 0,25) | M3011/1: | $L_3 \geq 700 \text{ }\mu\text{H}$, | $f = 10 \text{ kHz}$, | $U_{\text{AC,r.m.s.}} = 100 \text{ mV}$ |
| 3) | (V) | M3011/6: | Polarity, turns ratio: | Tolerance $\pm 2 \%$ | |

see page 2

Applicable documents: see page 2

Date	Name	Index	Change
22.07.14	Pf.	82	Characteristic data: $I_{\text{DC}} < 100 \text{ mA}$ changed to $I_{\text{RMS}} < 100 \text{ mA (50/60Hz)}$. Lapidary change
30.01.12	Bs	82	Revised acc to EN 60950. Page A2: M3064 cancelled. M3292 added. CN-202

Hrsg.: KB-E editor	Bearb: Bs designer	KB-PM: Ert. check	freig.: HH released
-----------------------	-----------------------	----------------------	------------------------

 Weitergabe sowie Vervielfältigung dieser Unterlage, Verwertung und Mitteilung ihres Inhalts
 nicht gestattet, soweit nicht ausdrücklich zugestanden. Zuwiderhandlungen verpflichten zu
 Schadenersatz. Alle Rechte für den Fall der Patenterteilung oder GM-Eintragung vorbehalten

 Copying of this document, disclosing it to third parties or using the contents there for any
 purposes without express written authorization by use illegally forbidden.
 Any offenders are liable to pay all relevant damages.

		DATENBLATT / Specification		Sach Nr.: T60403-K5032-X102 Item no.:	
K-No.: 25606		Powerline transformer			Date: 22.07.2014
Customer:			Customers part no.:		Page 2 of 3
Inspection: (V: 100%-Test; AQL...: DIN ISO 2859-Teil1)					
4) (Fix05) M3291: Solderability test acc. to chapter 1					
5) (AQL 1/S4) M3200: Mechanical test					
Type test					
1) High voltage test according to M3014 $U_{t, r.m.s.} = 7,5 \text{ kV}, \quad 1 \text{ min}, \quad N1+N2 \text{ gegen/vs } N3$					
2) M3292: Resistance to soldering heat acc. to chapter 2					
Measurements after temperature balance of the test samples at room temperature					
Applicable documents:					
Constructed, manufactured and tested in accordance to EN 60950 (IEC 950) and agrees with the standards.					
Parameters: Reinforced insulation: N1+N2 to N3 Working voltage: 450 V r.m.s. Overvoltage category: 3 Pollution degree: 2 Insulation material group: 3		and / or		Reinforced insulation: N1+N2 to N3 Working voltage: 300 V r.m.s. Overvoltage category: 4 Pollution degree: 2 Insulation material group: 3	
Housing material, casting resin and wire UL – listed					
Packing: Drypack / MSL according VAC M3027					
Hrsg.: KB-E editor		Bearb: Bs designer		KB-PM: Ert. check	
				freig.: HH released	

K-No.: 25606

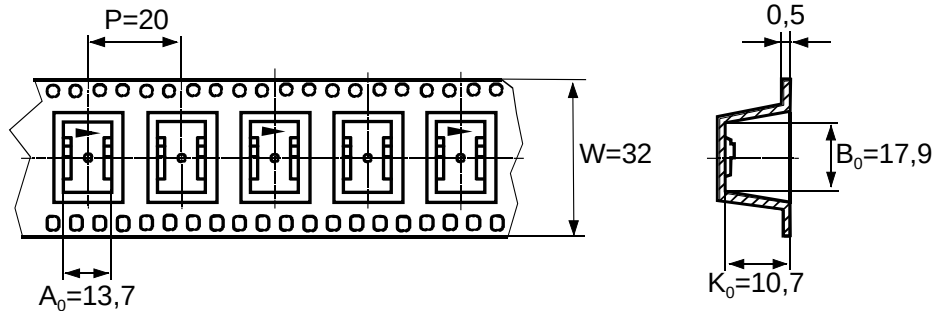
Powerline transformer

Date: 22.07.2014

Customer:

Customers part no.:

Page 3 of 3

packing information / Verpackungsinformation


Die ersten zwei Nester
gequetscht für besseres einfädeln.
(the first two nests must be crushed
for better thread)

Blistergurt
leading 25 empty pockets
Vorlauf 25 leere Nester

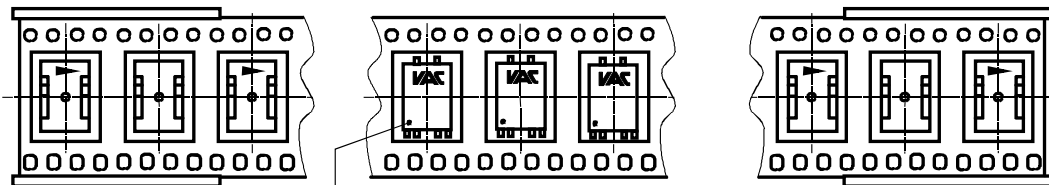
Deckband 400mm länger
wie Blistergurt
(cover longer
like carrier tape)

Blistergurt
laging 25 empty pockets
Nachlauf 25 leere Nester

Reel

laging:>25 empty pockets
Nachlauf >25 leere Nester

leading:>25 empty pockets
Vorlauf >25 leere Nester



Orientierung of Pin 1 in carrier tape
Anordnung von Stift 1 im Blistergurt

Insertion of components according orientation 1 shown in M-sheet 3510
Einsetzen der Bauelemente nach M-Blatt 3510 Orientierung 1

quantities in packing: 200 pieces/tape (packing carton) 200 Bauelemente/Rolle
Verpackungsmenge 5 tapes reel/carton (outside)=1000 pieces /carton(outside)
5Rollen/Karton =1000 Bauelemente /Außenkarton

Hrsg.: KB-E
editor

Bearb: Bs
designer

KB-PM: Ert.
check

freig.: HH
released

Weitergabe sowie Vervielfältigung dieser Unterlage, Verwertung und Mitteilung ihres Inhalts
nicht gestattet, soweit nicht ausdrücklich zugestanden. Zuwiderhandlungen verpflichten zu
Schadenersatz. Alle Rechte für den Fall der Patenterteilung oder GM-Eintragung vorbehalten

Copying of this document, disclosing it to third parties or using the contents there for any
purposes without express written authorization by use illegally forbidden.
Any offenders are liable to pay all relevant damages.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Vacuumschmelze:](#)

[T60403-K5032-X102](#)