
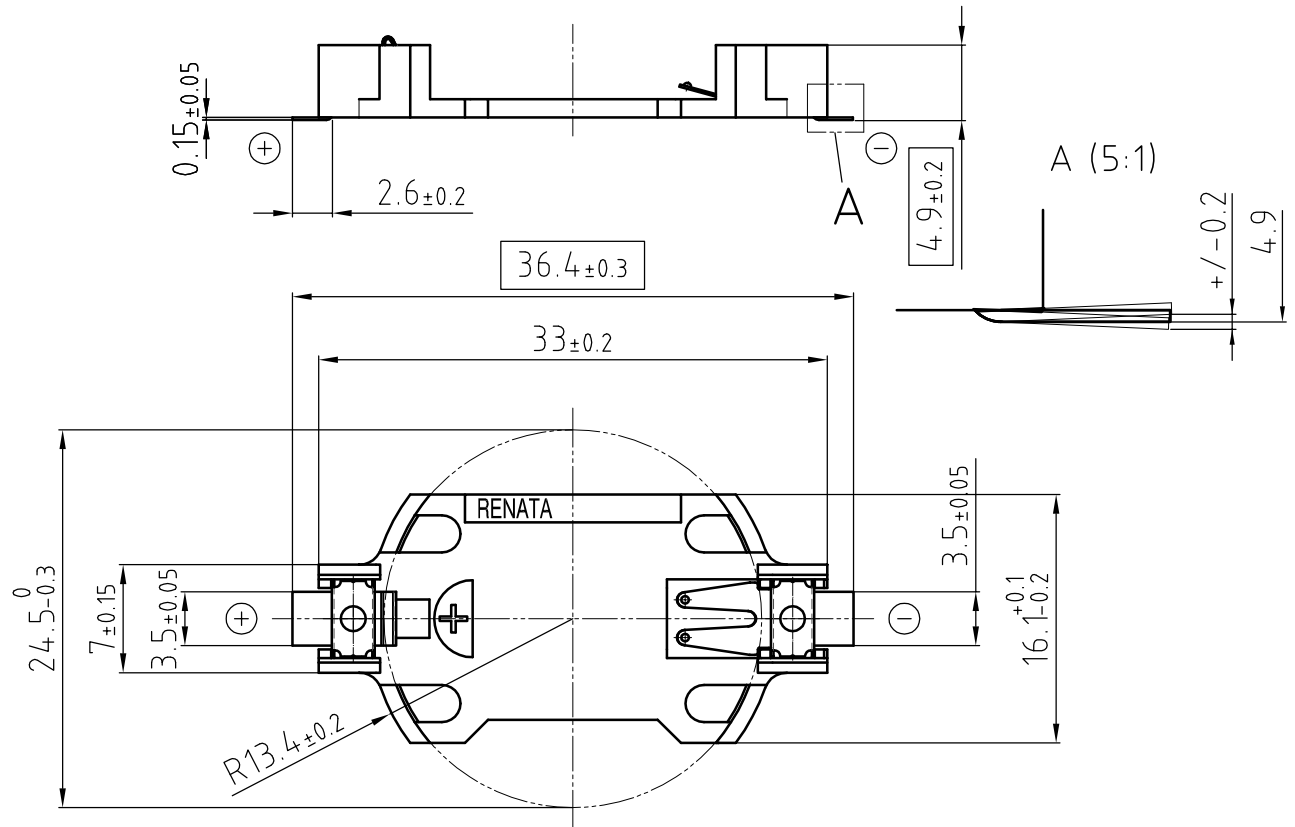


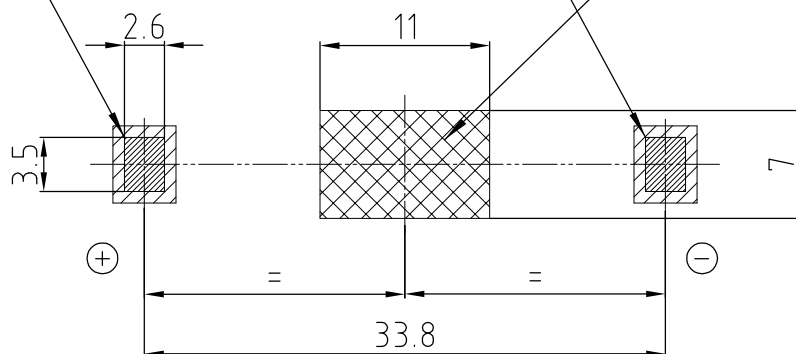

Zone for soldering

Zone for adhesive fixation
(as reference only)Layout
Top view

- Samples can deviate in the execution from the serie.

- Dimensions and tolerances can be specified only after the testing of the devices for the mass production definitely

Holder material : heat resistant, glass-fiber reinforced LCP

Battery contacts : spring stainless steel 301 nickel plated throughout

Solder contacts : spring stainless steel 301 solder area tin-plated throughout, min. thickness 5µm

All framed values will be used for dimension checking !

Rev.	☐			Rev.	☐				Customer's Approval			
Rev.	☐			Rev.	☐				Date			
Rev.	☐			Rev.	☐				Signature			
Titel:								Scale 2:1	Drawn	17.04.12	Wu Ping	
SMTU2430-C									Checked	05.06.12	RKL	
									Approved			
renata  batteries								CH-4452 Itingen Switzerland		10.0834.4-		

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Renata:

[SMTU2430-C](#) [SMTU2430-C.TR](#)