



LOC	DIST	REVISIONS				
		P	LTR	DESCRIPTION	DATE	DWN APVD
CM	00	K		REVISED PER ECO-06-006795	17MAY06	KW JE

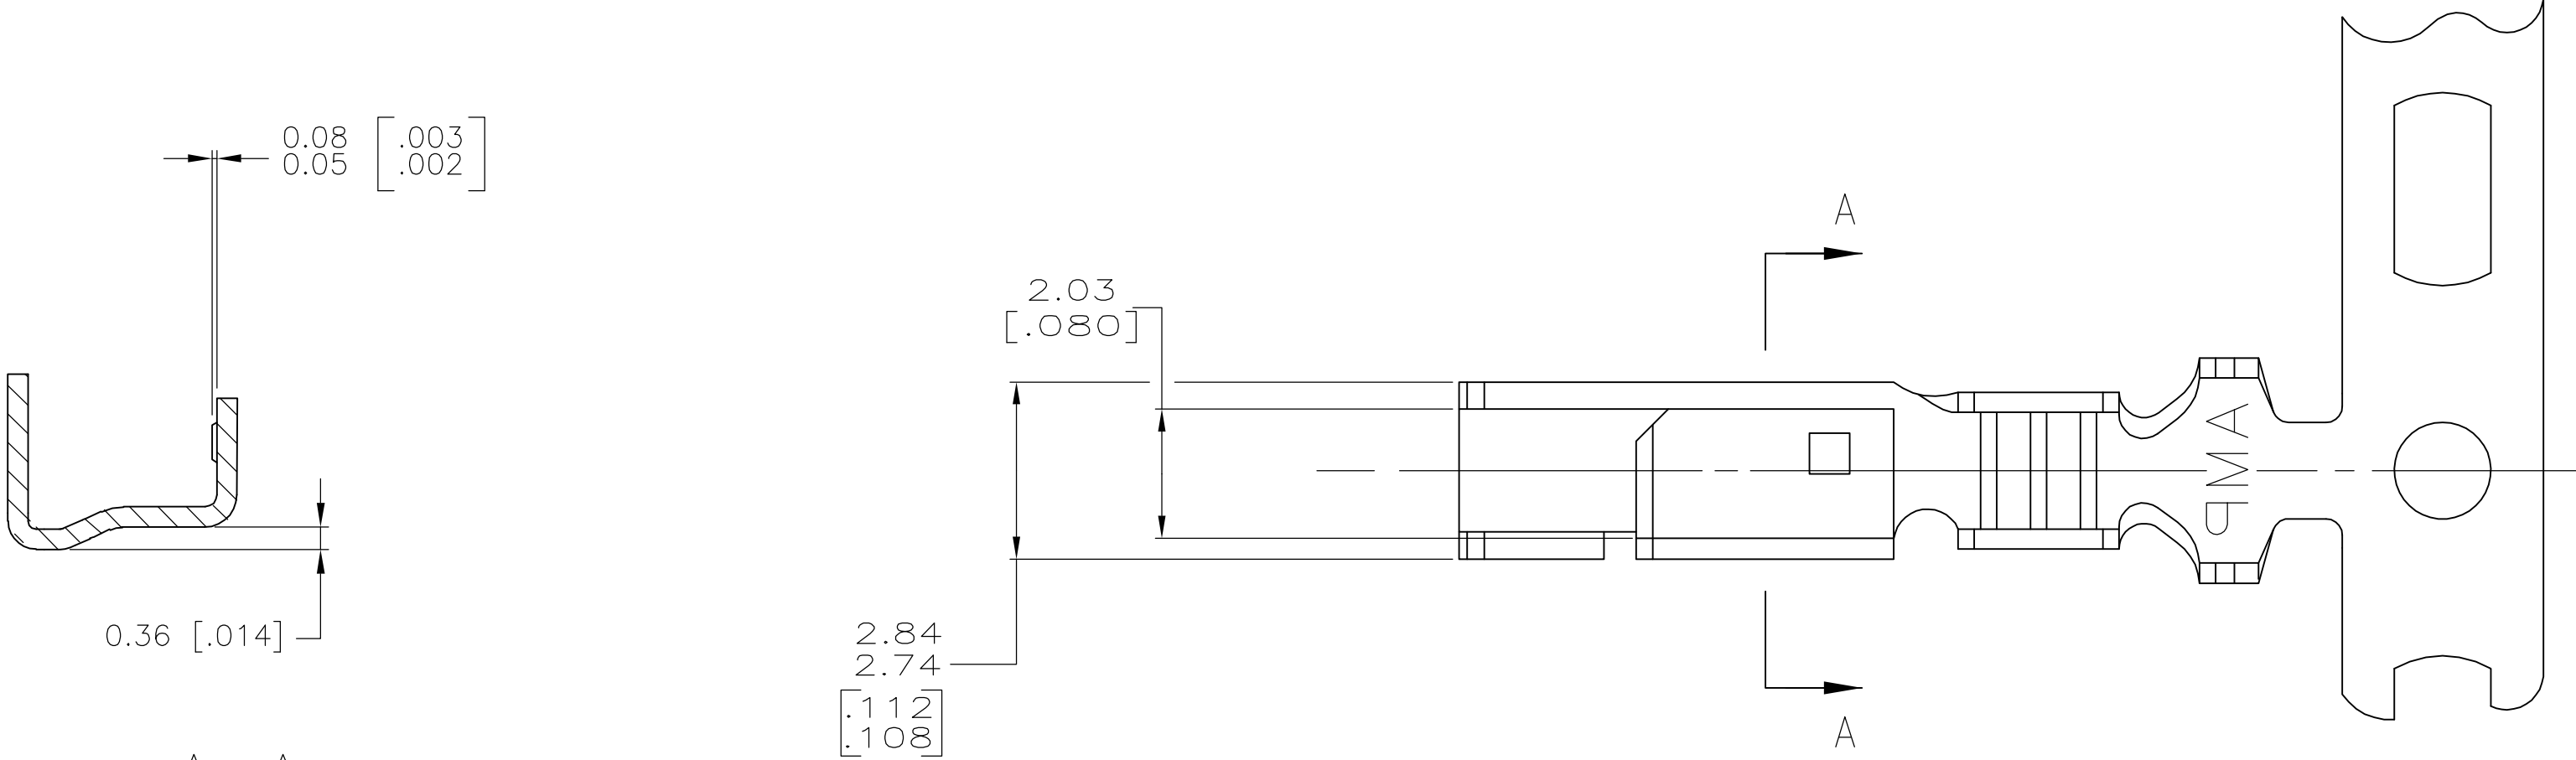


SECTION A-A

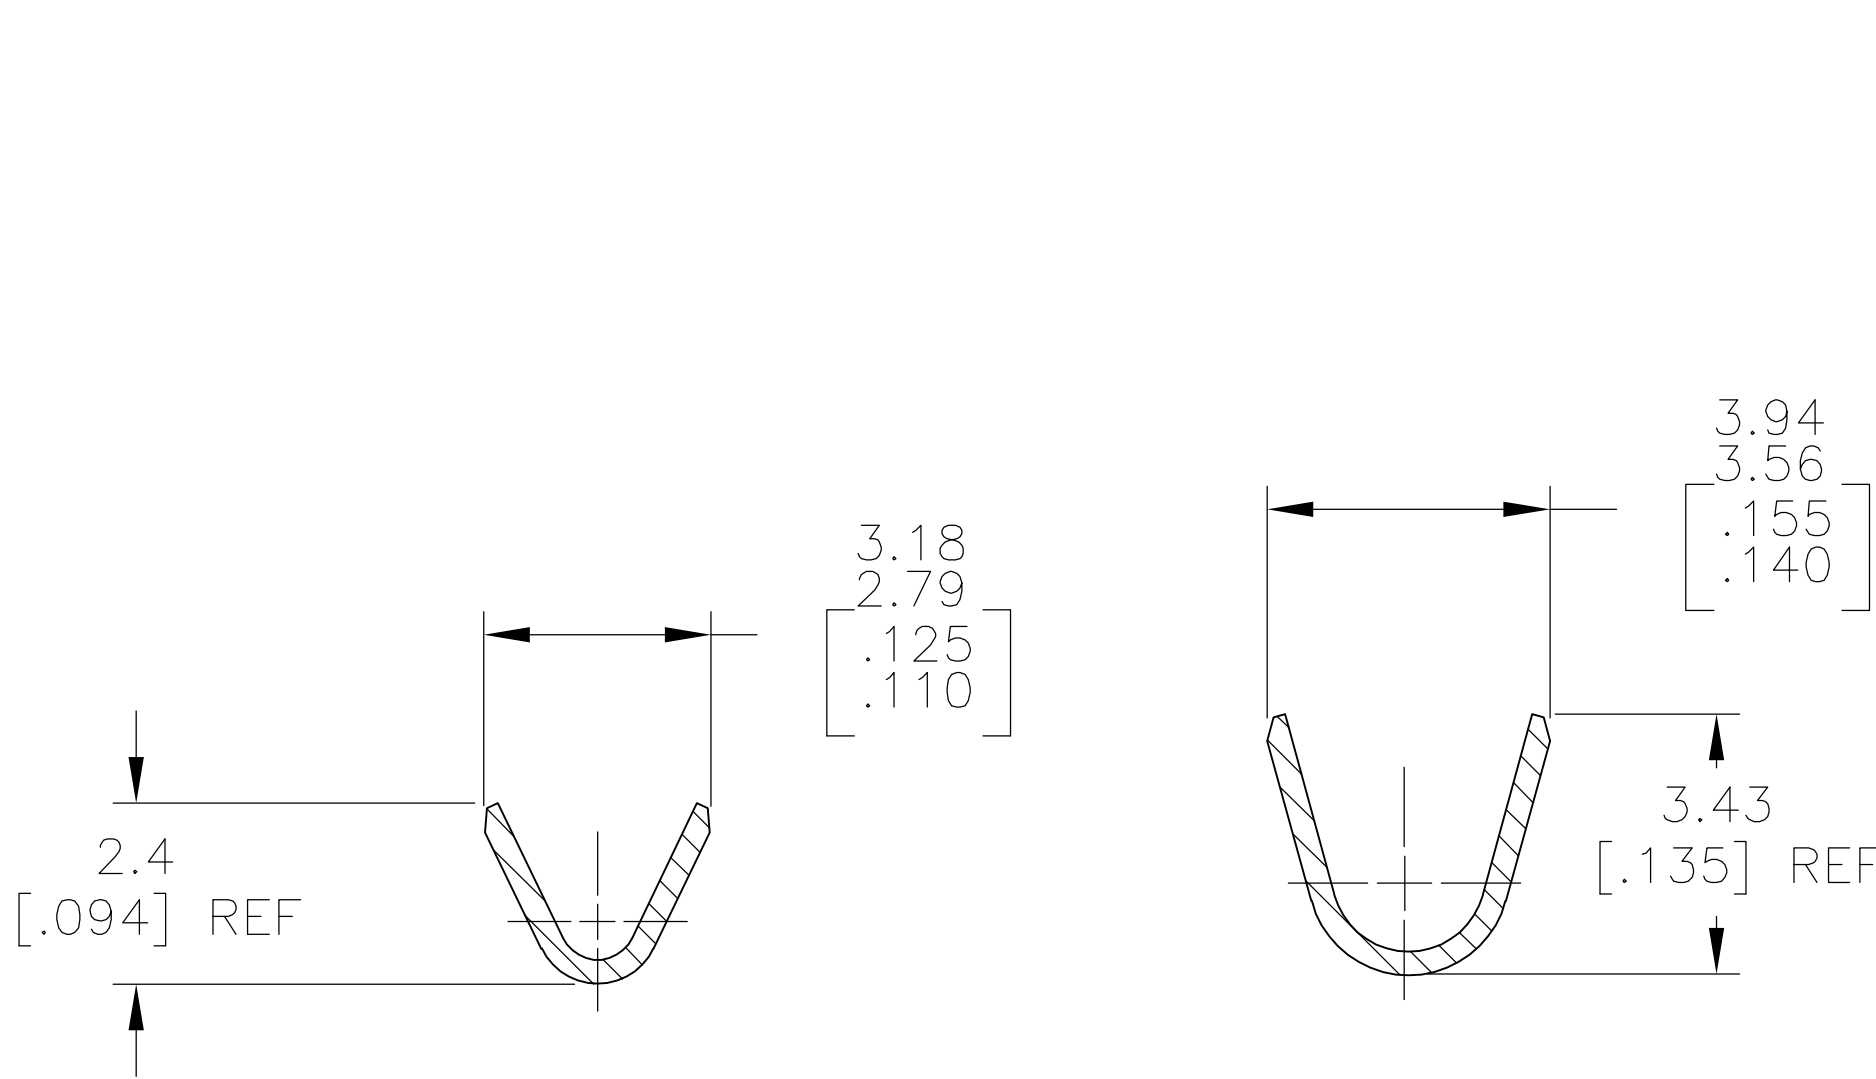

SECTION B-B

SECTION C-C

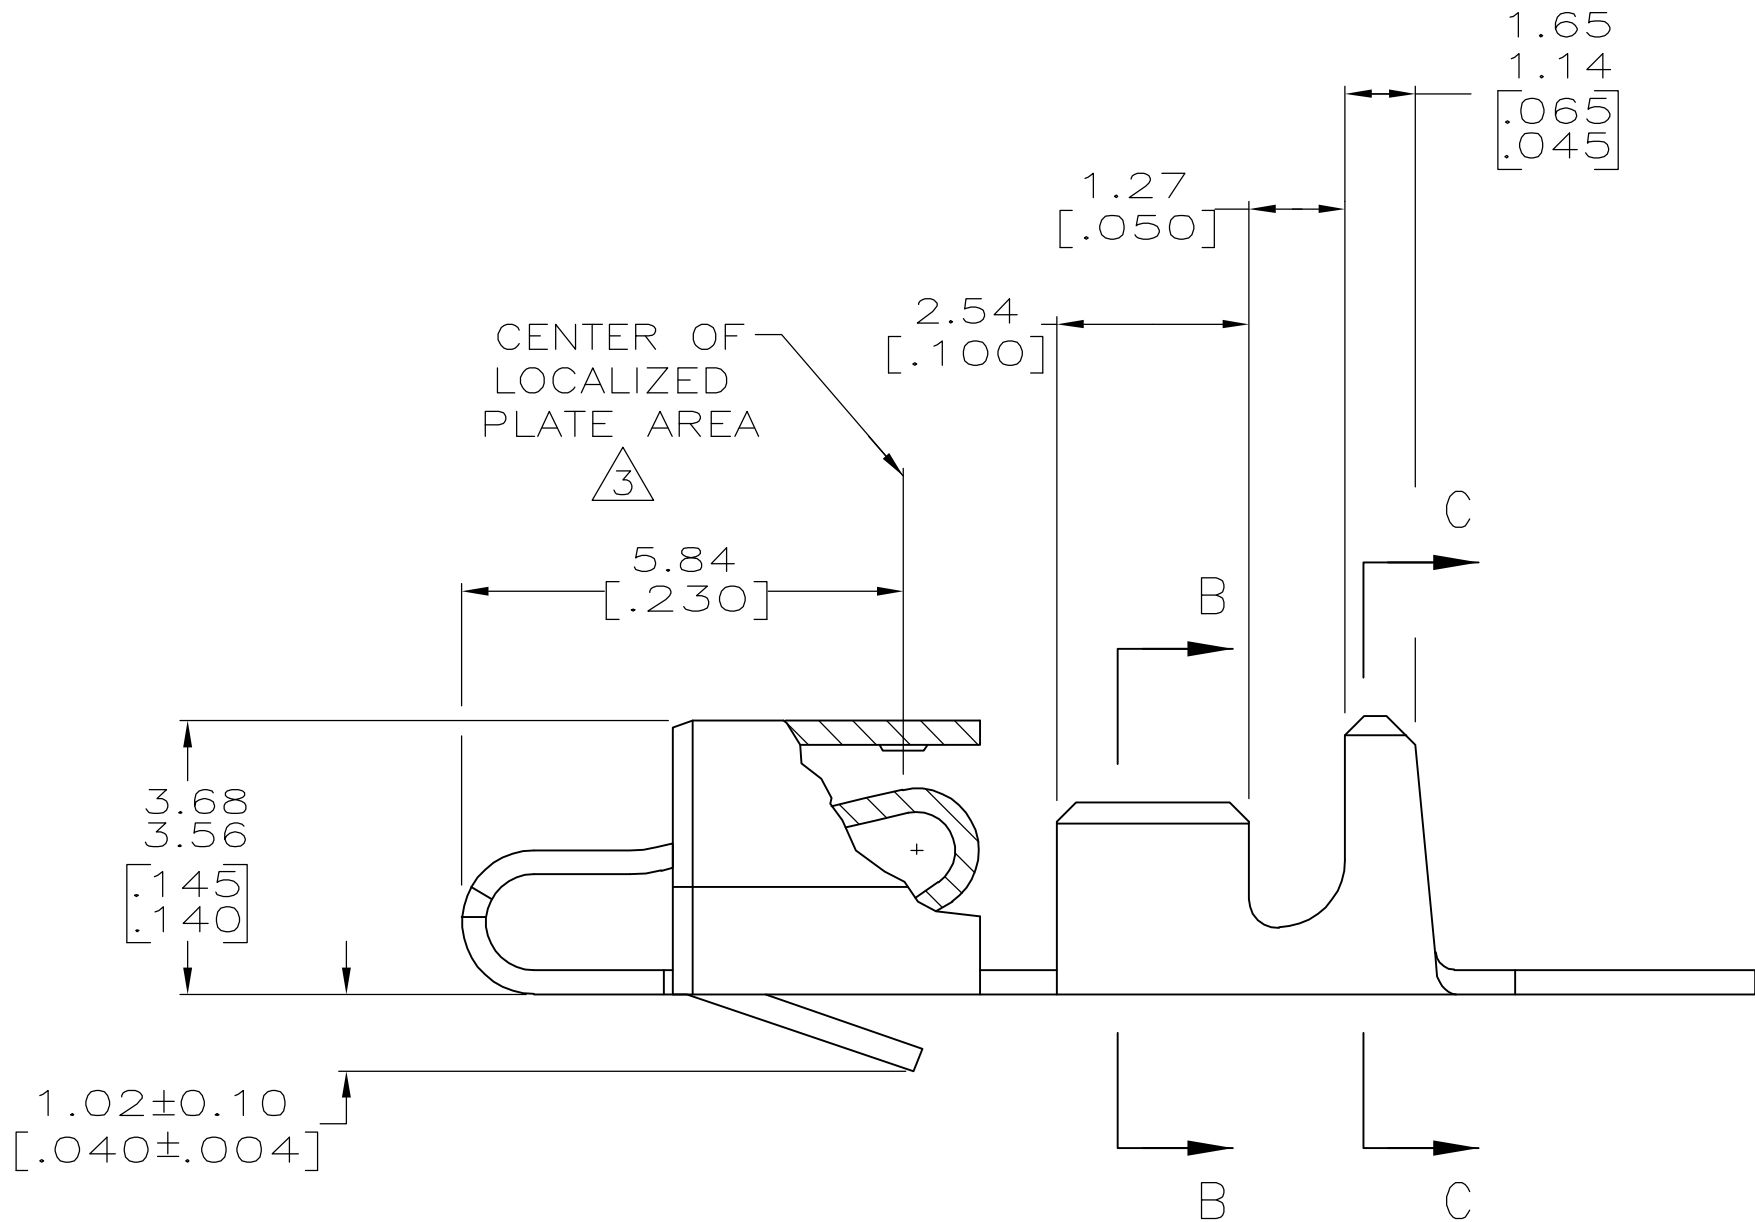

1. INSULATION RANGE: 1.09-2.79 [.043-.110]
WIRE RANGE: 0.2-0.9 mm² (24-18) AWG.
2. 0.00203 [.000080] MIN BRIGHT TIN-LEAD OVER
0.00127 [.000050] MIN NICKEL.
3. 0.00076 [.000030] MIN THICK GOLD STRIPES IN
LOCALIZED PLATE AREA ON BEAM AND DIMPLE OVER
0.00127 [.000050] MIN THICK NICKEL OVER ENTIRE
CONTACT.
4. DIMENSIONS IN BRACKETS ARE IN INCHES.
5. 0.00203 [.000080] MIN TIN OVER
0.00127 [.000050] MIN NICKEL.

5	3-770476-1
3	770476-2
2	770476-1
FINISH	PART NO.

METRIC

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN K. WHITAKER 18OCT2004	Tyco Electronics Corporation Greensboro, NC 27409	
DIMENSIONS: mm [INCHES]		CHK J. ELLIS	NAME	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD J. ELLIS	PRODUCT SPEC	
0 PLC ± -		APPLICATION SPEC		
1 PLC ± -		SIZE		
2 PLC ± -		CAGE CODE		
3 PLC ± .005		DRAWING NO		
4 PLC ± -		RESTRICTED TO		
ANGLES FINISH ± 0.30°		WEIGHT		
MATERIAL		CUSTOMER DRAWING		
-		SCALE 10:1		
		SHEET 1 OF 1		
		REV K		