


LI0603G121R-10

**UNCONTROLLED
DOCUMENT**

PHYSICAL DIMENSIONS:

A	1.60 [.063]	$\pm$ 0.15	[.006]
B	0.80 [.031]	$\pm$ 0.15	[.006]
C	0.80 [.031]	$\pm$ 0.15	[.006]
D	0.36 [.014]	$\pm$ 0.15	[.006]


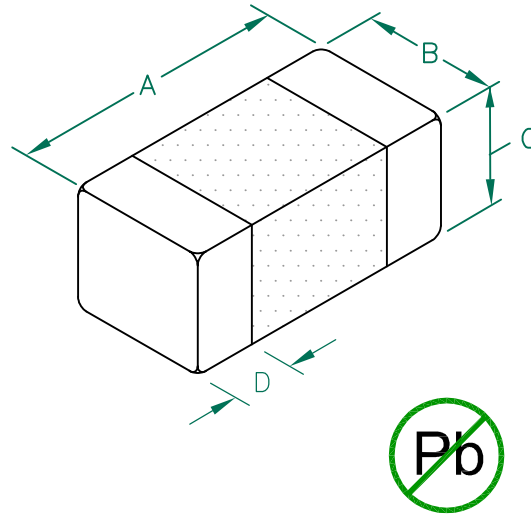


ELECTRICAL CHARACTERISTICS:


Z @ 100MHz (Ω)	DCR (Ω)	Rated Current
Nominal	120	
Minimum	90	
Maximum	150	0.20 700 mA

NOTES: UNLESS OTHERWISE SPECIFIED

1. TAPED AND REELED per CURRENT EIA SPECIFICATIONS 7" REELS, 4000 PCS/REEL.
2. TERMINATION FINISH IS 100% TIN.
3. COMPONENTS SHOULD BE ADEQUATELY PREHEATED BEFORE SOLDERING.
4. OPERATING TEMP. RANGE: $-40^{\circ}\text{C} \sim +125^{\circ}\text{C}$. (INCLUDING SELF-HEATING)

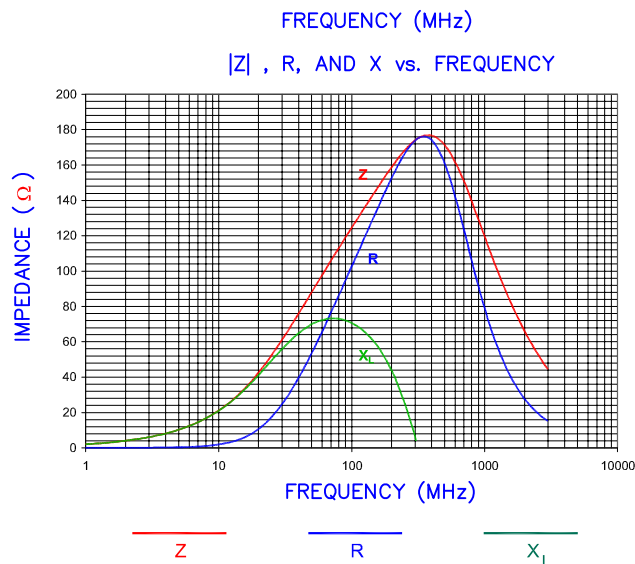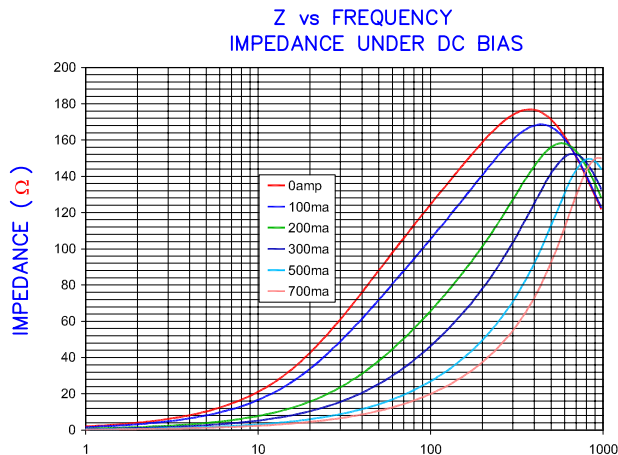


LAND PATTERNS FOR REFLOW SOLDERING

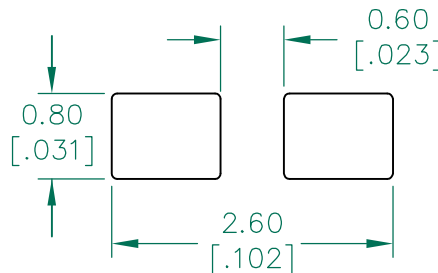

(For wave soldering, add 0.762
[.030] to this dimension)

RECOMMENDED SOLDERING CONDITIONS

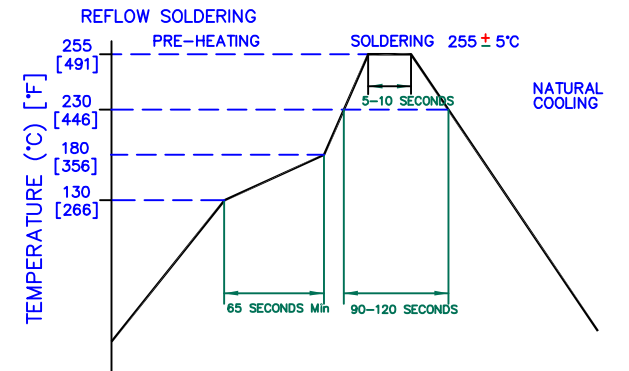

DIMENSIONS ARE IN mm [INCHES].				This print is the property of Laird Tech. and is loaned in confidence subject to return upon request and with the understanding that no copies shall be made without the written consent of Laird Tech. All rights to design or invention are reserved.			
				Laird			
				PROJECT/PART NUMBER: LI0603G121R-10			
C				REV	C	PART TYPE: CO-FIRE	DRAWN BY: TMB
B				DATE:	03/26/04	SCALE: -	SHEET: 2 of 2
A				DATE:	03/26/04	TMB	
REV				DESCRIPTION	DATE	INT	