



Inductive sensor

Ni15-S30-AP6X



- threaded barrel, M30 x 1,5
- plastic, PA12-GF30
- 3-wire DC, 10...30 VDC
- normally open pnp output
- cable connection

Wiring diagram



Function principles

Inductive proximity switches are designed for wear-free non-contact detection of metal objects. For this they use a high-frequency electro-magnetic AC field that interacts with the target. With inductive sensors, this field is generated by an LC resonant circuit with a ferrite core coil.

Type	Ni15-S30-AP6X
Ident-No.	46592
Rated operating distance S_n	15 mm
Mounting mode	non-flush
Hysteresis (switching distance)	3... 15 %
Min. repeat accuracy	≤ 2 %
Temperature drift	$\leq \pm 10$ %
Operating temperature	-25 ...+ 70 °C
Rated operational voltage (DC) U_B	10... 30 VDC
Max. ripple	≤ 10 % U_{pp}
Rated operational current (DC) I_e	≤ 200 mA
No-load current I_0	≤ 15 mA
Max. OFF-state current	$\leq 0,1$ mA
Max. switching frequency	$\leq 0,5$ kHz
Rated insulation voltage	$\leq 0,5$ kV
Output function	3-wire, normally open, PNP
Short-circuit protection	yes, cyclic
Max. voltage drop at I_e	$\leq 1,8$ V
Wire breakage / reverse polarity protection	yes / complete
Housing style	threaded barrel; M30 x 1,5
Dimensions	64 mm
Housing material	plastic, PA12-GF30
Active face	plastic, PA12-GF30
Max. fixing torque of coupling nut	5 Nm
Wiring	cable
Cable	$\varnothing 5,2$, LifYY, PVC, 2 m
Cable cross section	3 x 0,34 mm ²
Vibration resistance	55 Hz (1 mm)
Shock resistance	30 x g (11 ms)
Degree of protection	IP67
Switching status indication	LED yellow

Inductive sensor


Ni15-S30-AP6X

Mounting instructions

	minimum gap
Gap D	3 x B
Gap W	3 x Sn
Gap T	3 x B
Gap S	1,5 x B
Gap G	6 x Sn
Gap N	2 x Sn

Diameter of active face B


Ø 30 mm

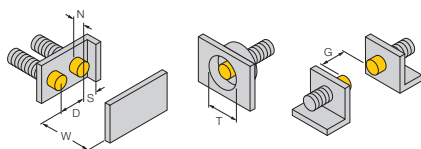

Inductive sensor

Ni15-S30-AP6X

Accessories

Typ	Ident-No.	Description	Dimension drawing
QM-30	6945103	quick-mount fixing clamp with dead-stop; material: chrome-plated brass external thread M36 x 1,5.	
BST-30B	6947216	fixing clamp with dead-stop; material: PA6	