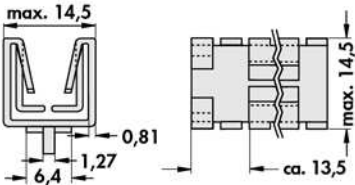

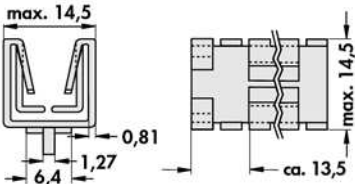

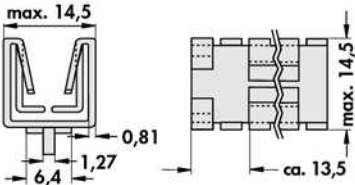











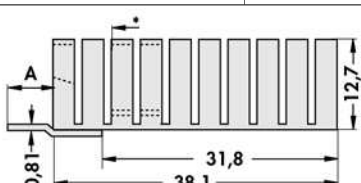
Attachable heatsink

with tinned soldering lug for direct soldering onto circuit board, for horizontal installation

art. no.			26 K/W	
FK 242 SA 220 H				
art. no.			21 K/W	
FK 237 SA 220 H				
art. no.			16 K/W	
FK 240 SA 220 H				

* = touch in edge of transistor
material: aluminium
surface treatment: black anodised

with tinned soldering lug for direct soldering onto circuit board, for vertical installation

						
art. no.	A [mm]	R _{th} [K/W]	art. no.	A [mm]	R _{th} [K/W]	
FK 242 SA 220 V	6.35	26	FK 242 SA 220 VL	9.53	26	
						
art. no.	A [mm]	R _{th} [K/W]	art. no.	A [mm]	R _{th} [K/W]	
FK 237 SA 220 V	6.35	21	FK 237 SA 220 VL	9.53	21	
						
art. no.	A [mm]	R _{th} [K/W]	art. no.	A [mm]	R _{th} [K/W]	
FK 240 SA 220 V	6.35	16	FK 240 SA 220 VL	9.53	16	

* = touch in edge of transistor
material: aluminium
surface treatment: black anodised

Heatsinks for D PAK
Heatsinks for transistors
Silicone wafers
Mica wafers

→ C 17
→ C 4 - 9
→ E 2 - 4
→ E 11

technical annotations
U-shaped heatsink
Aluminium oxide wafers
Kapton insulator washers

→ A 2 - 7
→ A 119 - 121
→ E 9 - 10
→ E 8