

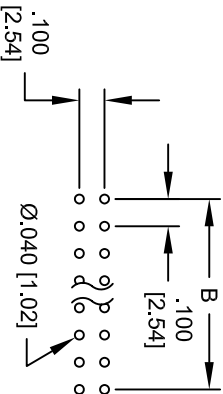
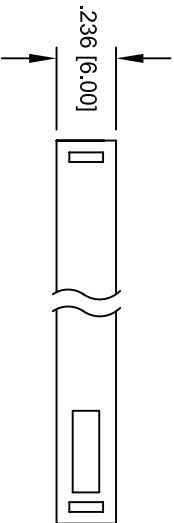


APPROVED: _____
DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	11/16/04	
		ADDED ROHS LOGO	02/14/07	BAS
A		ADDED 6 POSITION	10/16/08	SS

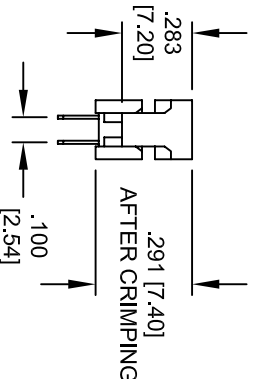

RECOMMENDED
PCB LAYOUT

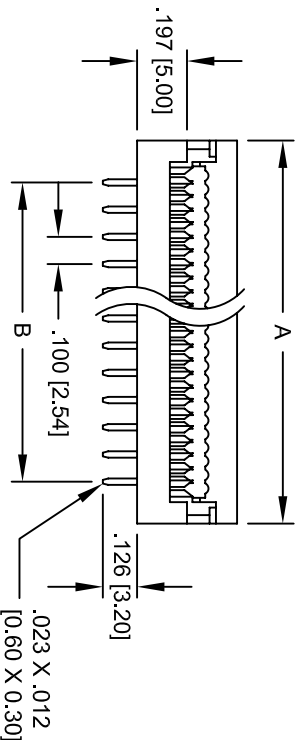

POSITIONS	A	B
06	.514 [13.07]	.200 [5.08]
08	.610 [15.50]	.300 [7.62]
10	.710 [18.04]	.400 [10.16]
14	.910 [23.12]	.600 [15.24]
16	1.010 [25.66]	.700 [17.78]
20	1.210 [30.74]	.900 [22.86]
24	1.410 [35.82]	1.100 [27.94]
26	1.510 [38.36]	1.200 [30.48]
28	1.610 [40.90]	1.300 [33.02]
30	1.710 [43.44]	1.400 [35.56]
34	1.910 [48.52]	1.600 [40.64]
40	2.210 [56.14]	1.900 [48.26]
50	2.710 [68.84]	2.400 [60.96]
60	3.210 [81.54]	2.900 [73.66]
64	3.410 [86.62]	3.100 [78.74]

SPECIFICATIONS:

Material:

Insulator: PBT, rated UL 94V-0

Insulator color: Black

Contacts: Brass

Plating:

Tin over Copper underplate overall

Electrical:

Operating voltage: 250 VAC max

Current rating: 1 Amp max

Contact resistance: 20 mohms max

Insulation resistance: 5000 Mohms min @ 500 VDC

Dielectric withstanding voltage: 1000 VAC for 1 minute

Temperature Rating:

Operating temperature: -55°C to +105°C



ADAM TECH

909 Rahway Avenue, Union, NJ 07083
Phone: 908-687-5000 Fax: 908-687-5710

IDC DIP PLUG, .100 X .100

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM] TOLERANCES: EXCEPT AS NOTED				TITLE	
INCHES				Holes	
.X	± .10	ØX	± .10		
.XX	± .020	ØXX	± .015		
.XXX	± .015	ØXXX	± .010		
APPROVALS				DATE	
DRAWN	SS	11/16/04			
CHECKED					
APPROVED					
SIZE	PART NO.			REV.	
X	FTR-XX-T			A	
REF:	SCALE: NTS	SHEET 1 OF 1			