

Current Sensor : F02P***S05L



Features:

- Backward compatible to F02PS***05 series
- Anti-Surge current (4kAT, 8/20uS, single)
- Mounting area reduced ; pin compatible. Longitudinal dimension reduced
- Super precision & High Stability (low temperature, drift)
- Unipolar power voltage ; +5V
- Multi-range models

Comparison of the main features of F*****S05L series


Series	Features
F01P***S05L	No reference access
F02P***S05L	No reference access. Ref In/Out
F03P***S05L	No reference access. Ref In/Out. Higher creep age and clearance distance.

*** = Rated Current Symbol

Specification

	F02P***S05L
Maximum Peak Current	4kAT (2kAx2. Number of primary turns is two turns)
Rated Current If (***= rated current symbol)	6A(006) / 15A(015) / 25A(025) 50A(050)
Maximum Current	±20A(If=6A) / ±51A(If=15A) / ±85A(If=25A) / ±150A(If=50A)
Existence of reference access	Yes
Number of primary busbar	3 pcs
Clearance distance ; Primary ↔Secondary	7.5 mm
Standards	UL508 (file#E243511) , EN501758, EN61010-1 , EN60950-1
Ambient Operating Temperature	-40°C ~ +105°C

Mounting Area

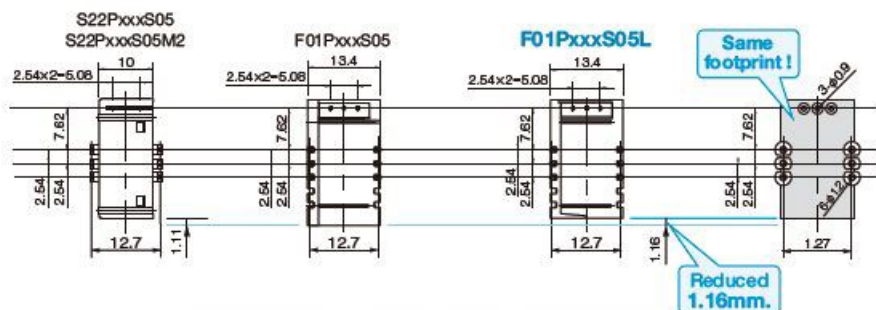

The mounting area has been reduced more than the F02P series. However, F02P***S05L series are 100% compatible with original footprint mounting.

The F02P/F03PxxxS05L series also similarly reduces the mounting area.

Current Sensor : F02P***S05L

Absolute Maximum Rating

	Symbol	Unit	Value	Notes
Supply Voltage	Vcc	V	7	
Primary Conductor Temperature	-	°C	110	
ESD (HBM: Human Body Model)	-	kV	4	C=100pF , R=1.5kΩ
Maximum Peak Current	-	kAT	4	Current Waveform : - Front time 8μs - Time to half value 20μs - Single

Isolation Characteristics

	Symbol	Unit	Value	Notes
Insulation Voltage	Vd	-	AC4100V for 1 min. (Sensing Current 0.5mA)	Primary↔Secondary
Insulation Resistance	Ris	-	≥500mΩ (@DC500V)	Primary↔Secondary
Clearance distance	dCi	-	7.5mm (TYP)	Primary↔Secondary
Creep age distance	dCp	-	7.5mm (TYP)	Primary↔Secondary
Case material	-	-	UL94 V-0	
Comparative Tracking Index (CTI)	CTI	V	600	
Application Example	-	-	300V , CAT III , PD2	Reinforced Isolation Non uniform field according to EN50178 , EN61010
	-	-	600V , CAT III , PD2	Simple isolation Non uniform field according to EN50178 , EN61010

Environmental and Mechanical Characteristics

	Symbol	Unit	Value		
			min	typ	max
Ambient Operating Temperature	Ta	°C	- 40		+ 105
Ambient Storage Temperature	Ts	°C	- 40		+105
Mass	-	g		12	

Current Sensor : F02P***S05L

Specification

(*1) = Offset voltage value is after removal of core hysteresis

		Symbol	Unit	Value			Notes
				min	typ	max	
Rated Current	F02P006S05L	If	A		6		
	F02P015S05L				15		
	F02P025S05L				25		
	F02P050S05L				50		
Maximum Current (@ Vcc : +5V , Ta : +105°C)	F02P006S05L	Ipmax	A	- 20		20	
	F02P015S05L			- 51		51	
	F02P025S05L			- 85		85	
	F02P050S05L			- 150		150	
Supply Voltage		Vcc	V	4.75	5.00	5.25	
Number of primary turns		Np	T	1,2,3			
Number of secondary turns	F02P006S05L	Ns	T		1816		
	F02P015S05L				1737		
	F02P025S05L				1764		
	F02P050S05L				1600		
Consumption current (at If)	F02P006S05L	Icc	mA		25		Icc=15+Ip(mA) / Ns
	F02P015S05L				30		
	F02P025S05L				35		
	F02P050S05L				55		
Internal Reference Voltage (@Ip=0A)		Vref1	V	2.495	2.500	2.505	Ref OUT mode
External Reference Voltage		Vref2	V	0		4	Ref IN mode
Output Voltage		Vo	V	0.375		4.625	
Output Voltage (Ip=0A)		Vo	V		Vref1, Vref 2		
Electrical Offset Voltage (*1)	F02P006S05L	Voe	mV	- 5.300		5.300	
	F02P015S05L			- 2.210		2.210	
	F02P025S05L			- 1.35		1.35	
	F02P050S05L			- 0.725		0.725	
Electrical Offset Current referred to primary	F02P006S05L	loe	mA	- 51		51	
	F02P015S05L			- 53		53	
	F02P025S05L			- 54		54	
	F02P050S05L			- 58		58	

Current Sensor : F02P***S05L

Specification

		Symbol	Unit	Value			Notes
				min	typ	max	
Temperature coefficient of Output voltage (@ Ip=0A)	F01P006S05L	TCVo	ppm/K		±6.0	±14	ppm/K of 2.5V (-40°C~+105°C)
	F01P015S05L				±2.3	±6	
	F01P025S05L				±1.4	±4	
	F01P050S05L				±0.7	±3	
Sensitivity (Theoretical value)	F01P006S05L	Gth	mV/A		104.2		625mV/If
	F01P015S05L				41.67		
	F01P025S05L				25		
	F01P050S05L				12.5		
Sensitivity Error		ε _G	%	- 0.7		0.7	
Temperature coefficient of Sensitivity (@Ta=-40°C~+105°C)		TCG	ppm/K			±40	
Output Linearity		ε _L	%	- 0.1		0.1	
Magnetic offset current referred to primary (@ 10xIf)		I _{om}	A	- 0.1		0.1	
Output current noise referred to primary (@ 100Hz~100kHz)		I _{no}	μA/ (Hz) ^{1/2}		20		RL=1kΩ
Peak to peak output ripple at oscillator frequency (If typ=450kHz)	F01P006S05L	-	mV		40	160	RL=1kΩ
	F01P015S05L				15	60	
	F01P025S05L				10	40	
	F01P050S05L				5	20	
Reaction time (@ 10% of If)	F01P006S05L	tra	μs			0.3	RL=1kΩ, di/dt=18A/μs
	F01P015S05L					0.3	RL=1kΩ, di/dt=44A/μs
	F01P025S05L					0.3	RL=1kΩ, di/dt=68A/μs
	F01P050S05L					0.3	RL=1kΩ, di/dt=100/μs
Response time (@90% of If)	F01P006S05L	tr	μs			0.3	RL=1kΩ, di/dt=18A/μs
	F01P015S05L					0.3	RL=1kΩ, di/dt=44A/μs
	F01P025S05L					0.3	RL=1kΩ, di/dt=68A/μs
	F01P050S05L					0.3	RL=1kΩ, di/dt=100/μs

Current Sensor : F02P***S05L

Specification

		Symbol	Unit	Value			Notes
				min	typ	max	
Response time 2 (@ 10% of If to 90% of Vo)		tr	μs			0.6	RL=1kΩ
Frequency bandwidth (± 1dB)		BW	kHz	200			RL=1kΩ
Frequency bandwidth (± 3dB)		BW	kHz	300			RL=1kΩ
Output Voltage Accuracy (Overall)	F01P006S05L	X _G	%			1.7	X _G =(100xV _{oe} /625)+ε _G +ε _L
	F01P015S05L					1.2	
	F01P025S05L					1.0	
	F01P050S05L					0.9	

Standards

EN 50178 ; EN 61010-1 ; EN 60950-1 ; UL 508 (file no. E243511)

Characteristic Curve (TYP)

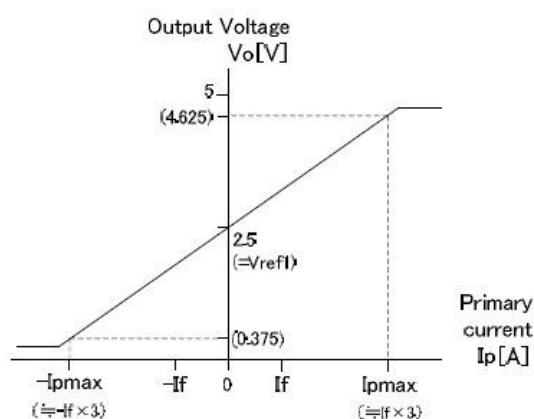


Figure 1: Linearity curve (Internal reference voltage)

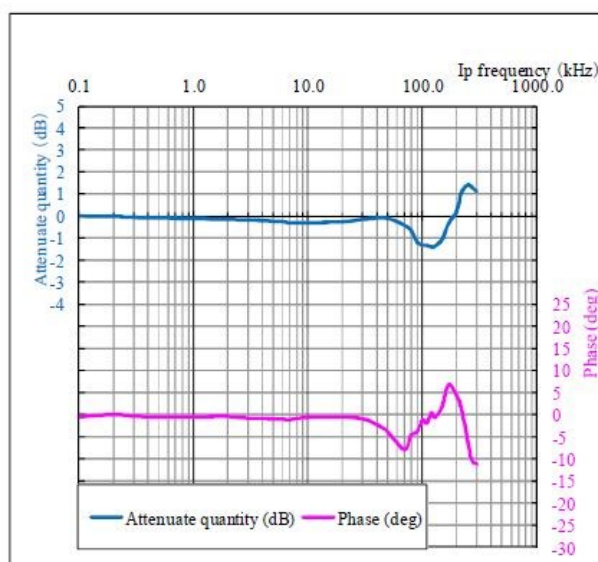


Figure 2: Frequency response curve

ex) F02P025S05L

Measurement condition Ta=+25°C, RL=1kΩ, Ip=3A, Vcc=+5V

Current Sensor : F02P***S05L

Maximum Continuous DC primary current

According to which the following conditions are true the maximum continuous DC primary current plot shows the boundary of the area.

1. $I_p < I_{pmax}$
2. Junction temperature
 $T_j < 125^{\circ}\text{C}$
3. Primary conductor temperature
 $< 110^{\circ}\text{C}$
4. Resistor power dissipation
 $< 0.5 \times \text{rated power}$

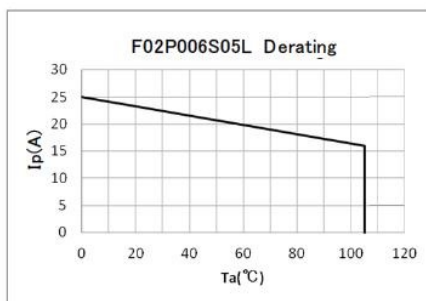


Figure 3: I_p vs T_a for F02P006S05L

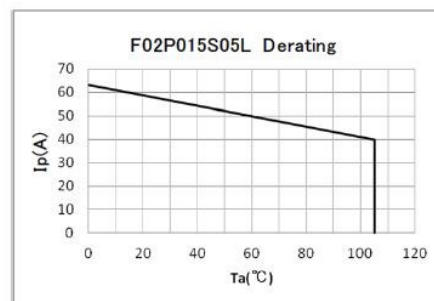


Figure 4: I_p vs T_a for F02P015S05L

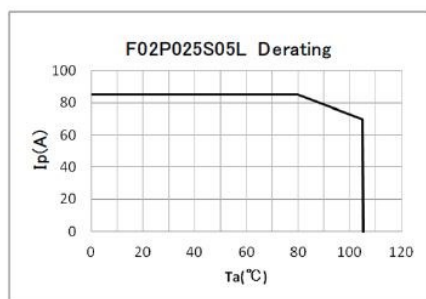


Figure 5: I_p vs T_a for F02P025S05L

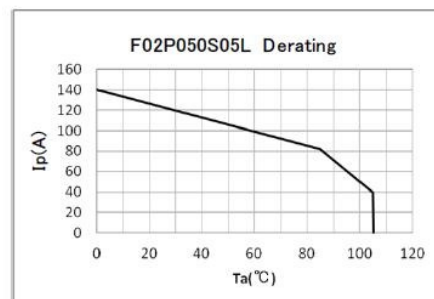


Figure 6: I_p vs T_a for F02P050S05L

Frequency Derating

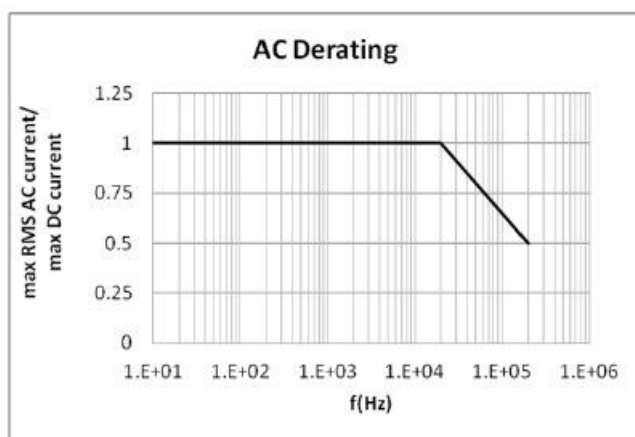


Figure 7 : Maximum RMS AC primary current / maximum DC primary current vs frequency

Current Sensor : F02P***S05L

Reference voltage

Ref pin has two modes Ref IN and Ref OUT.

<Ref OUT mode>


The 2.5V internal precision reference is used by the transducer as the reference point for bipolar measurement.

<Ref IN mode>

An external reference voltage is connected to the Ref pin; this voltage is specified in the range 0 to 4V. Its voltage is used as the reference voltage at the time of measurement.


- Typical Source Current ($V_{ref2} - 2.5$) / 680
The maximum value will be 2.2mA typ when $V_{ref2}=4V$
- Typical Sink Current ($V_{ref2} - 2.5$) / 680
The maximum value will be 3.68mA typ. When $V_{ref2}=0V$

The following graphs show how the measuring range of each transducer version depends on external reference voltage value

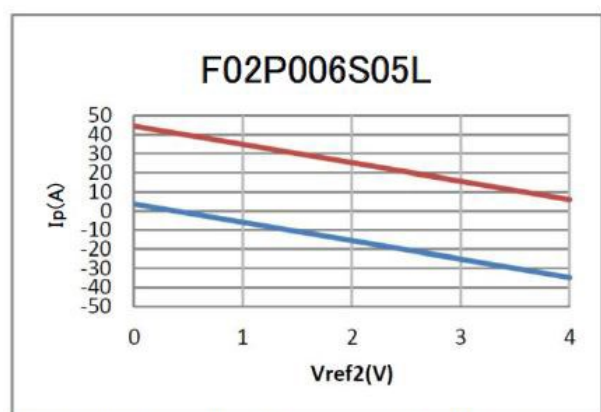

Upper limit: $I_p = -9.6 \times V_{ref2} + 44.4$ ($V_{ref2}=0...4V$)

Lower limit: $I_p = -9.6 \times V_{ref2} + 3.6$ ($V_{ref2}=0...4V$)

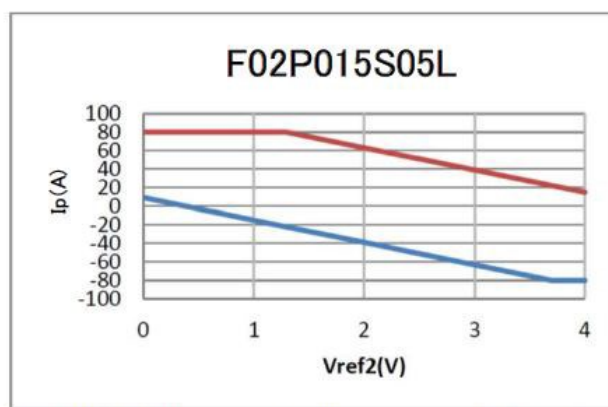


Upper limit: $I_p = 80$ ($V_{ref2}=0...1.29V$)

$I_p = -24 \times V_{ref2} + 111$ ($V_{ref2}=1.29...4V$)

Lower limit: $I_p = -24 \times V_{ref2} + 9$ ($V_{ref2}=0...3.7V$)

$I_p = -80$ ($V_{ref2}=3.7...4V$)

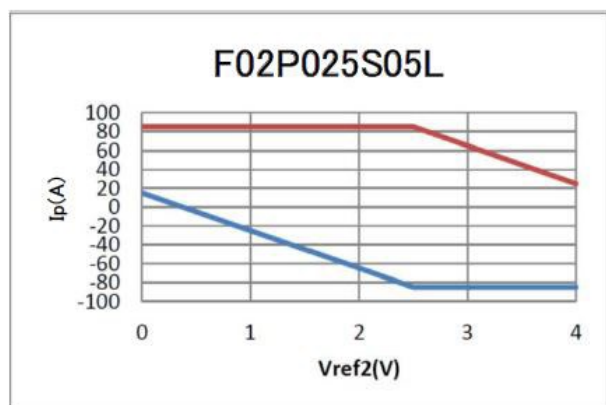


Upper limit: $I_p = 85$ ($V_{ref2}=0...2.5V$)

$I_p = -40 \times V_{ref2} + 185$ ($V_{ref2}=2.5...4V$)

Lower limit: $I_p = -40 \times V_{ref2} + 15$ ($V_{ref2}=0...2.5V$)

$I_p = -85$ ($V_{ref2}=2.5...4V$)

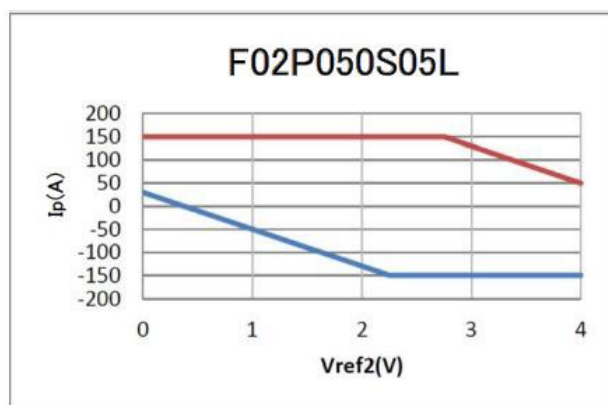

Upper limit: $I_p = 150$ ($V_{ref2}=0...2.75V$)

$I_p = -80 \times V_{ref2} + 370$ ($V_{ref2}=2.75...4V$)



Lower limit: $I_p = -80 \times V_{ref2} + 30$ ($V_{ref2}=0...2.25V$)

$I_p = -150$ ($V_{ref2}=2.25...4V$)






If do not prefer to use the Ref pin, please disconnect.

Current Sensor : F02P***S05L

Connection

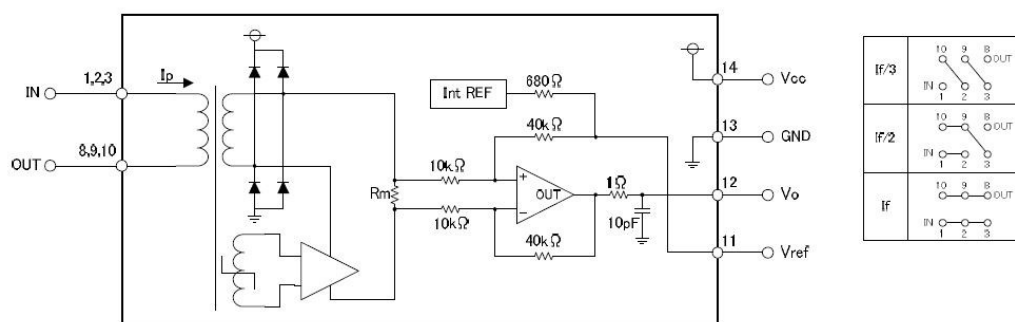

Dimensions (mm)

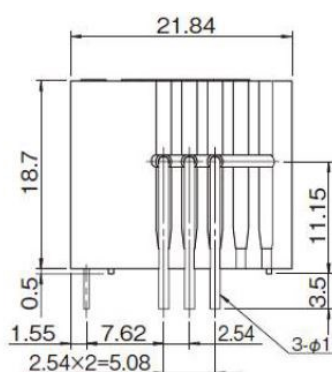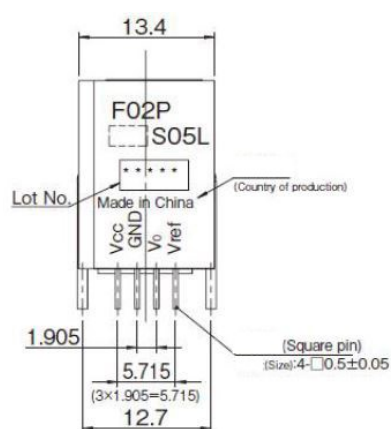

Terminal number	
① Input	⑧ Output
② Input	⑨ Output
③ Input	⑩ Output
④ -	⑪ Vref
⑤ -	⑫ Vo
⑥ -	⑬ GND
⑦ -	⑭ Vcc

Note

1. Unless otherwise specified, tolerances shall be $\pm 0.25\text{mm}$
2. Unit is [mm]

Recommended Hole Diameter (mm)

