


DASH NO.	M CODE	MADE FROM
----------	--------	-----------

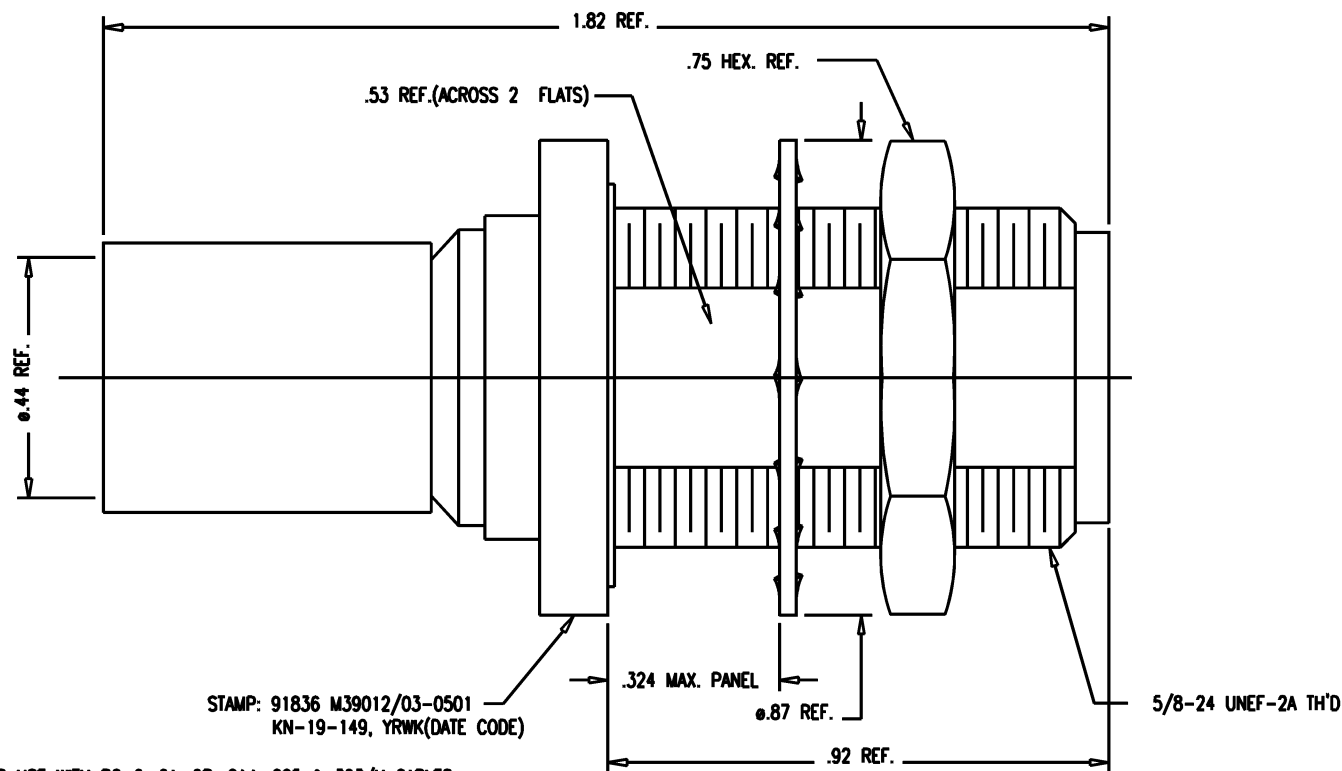

NOTES:

1. FOR USE WITH RG-9, 9A, 9B, 214, 225 & 393/U CABLES.
2. FOR CABLE TRIMMING SEE KTU-137 & KTD-138.
3. FOR FORMING USE CRIMP DIE KTH-2004.
4. FOR CABLING INSTRUCTIONS SEE CP-480.

5. MATERIALS:


INSULATOR: TEFLON, ASTM-D-4894
 LOCKWASHER: PHOS. BRONZE, ASTM-B-103
 CENTER CONTAC: BER. COP., ASTM-B-196
 K-GRIP SLEEVE: COM. BRONZE, ASTM-B-140
 GASKET: SILICONE RUBBER, ZZ-R-765
 ALL OTHER METAL PARTS: BRASS, ASTM-B16

6. FINISHES:

CENTER CONTACT-GOLD PLATE PER MIL-G-45204
 ALL OTHER METAL PARTS-SILVER PLATE PER QQ-S-365

7. ELECTRICAL CHARACTERISTICS:

NOMINAL IMPEDANCE-50 OHMS
 FREQUENCY RANGE-DC TO 11 GHZ
 WORKING VOLTAGE-1000 VRMS



MOUNTING HOLE

SD

M39012/03-0501

REVISIONS

ISSUE	CHANGES
6	CN 33220 C WJM 08/20/91
7	CN 37427 E JW 03/19/98
8	CN 38046 E DCT 7/10/00
9	CN 38496 E BDH 02/05/02

KN191497

SCALE 4:1

APPROX SURFACE AREA

KN-19-149

USED ON

REF:

JACK, BULKHEAD, N

DRAWN GINO DATE 04/30/74

DESIGN LJ DATE 08/02/74

APPR. DATE

KINGS

ELECTRONICS CO., INC.
 ROCK HILL, SOUTH CAROLINA 29730

M39012/03-0501

SD