

MOS FET Relays


G3VM-354C/C1/F/F1

Analog-switching MOS FET Relay with DPST-NC Contacts. General-purpose models added.

- Switches minute analog signals.
- Switching AC and DC.
- General-purpose models (high ON resistance) added.
- RoHS Compliant.

Application Examples

- Electronic automatic exchange systems
- Security systems
- Datacom (modem) systems
- FA systems and Measurement devices

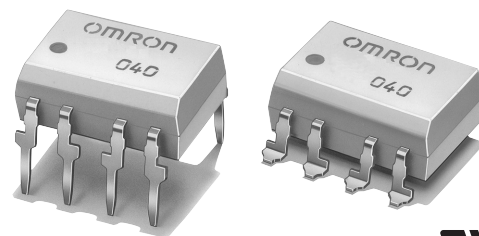


Note: The actual product is marked differently from the image shown here.

List of Models



Contact form	Terminals	Load voltage (peak value)	Model	Number per stick	Number per tape
DPST-NC	PCB terminals	350 VAC	G3VM-354C	50	---
	Surface-mounting terminals		G3VM-354C1		
			G3VM-354F		
			G3VM-354F1		
			G3VM-354F(TR)	---	1,500
			G3VM-354F1(TR)		

Dimensions






Note: All units are in millimeters unless otherwise indicated.

G3VM-354C/C1

Note: The actual product is marked differently from the image shown here.

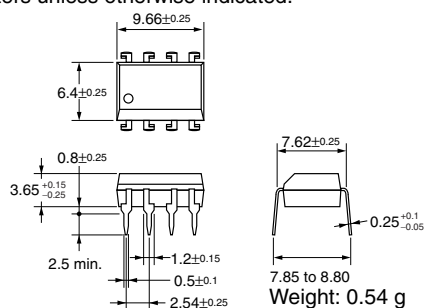**G3VM-354F/F1**

Note: The actual product is marked differently from the image shown here.

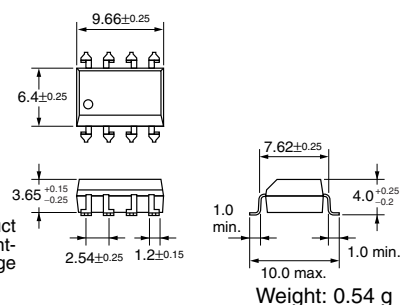**Terminal Arrangement/Internal Connections (Top View)****G3VM-354C/C1****G3VM-354F/F1****PCB Dimensions (Bottom View)****G3VM-354C/C1****Actual Mounting Pad Dimensions (Recommended Value, Top View)****G3VM-354F/F1**

■ Absolute Maximum Ratings (Ta = 25°C)

Item	Symbol	Rating	Unit	Measurement conditions
Input	LED forward current	I_F	50	mA
	Repetitive peak LED forward current	I_{FP}	1	A
	LED forward current reduction rate	$\Delta I_F/^\circ\text{C}$	-0.5	mA/°C
	LED reverse voltage	V_R	5	V
	Connection temperature	T_J	125	°C
Output	Load voltage (AC peak/DC)	V_{OFF}	350	V
	Continuous load current (AC peak/DC)	I_O	150 (100)	mA
	ON current reduction rate	$\Delta I_{ON}/^\circ\text{C}$	-1.5 (-1)	mA/°C
	Connection temperature	T_J	125	°C
Dielectric strength between input and output (See note 1.)		V_{I-O}	2,500	V_{rms}
Operating temperature		T_a	-40 to +85	°C
Storage temperature		T_{stg}	-55 to +125	°C
Soldering temperature (10 s)		---	260	°C

Note: 1. The dielectric strength between the input and output was checked by applying voltage between all pins as a group on the LED side and all pins as a group on the light-receiving side.

Values in parentheses are for the G3VM-354C1/F1

■ Electrical Characteristics (Ta = 25°C)

Item	Symbol	Minimum	Typical	Maximum	Unit	Measurement conditions
Input	LED forward voltage	V_F	1.0	1.15	1.3	V
	Reverse current	I_R	---	---	10	μA
	Capacity between terminals	C_T	---	30	---	pF
	Trigger LED forward current	I_{FT}	---	1	3	mA
Output	Maximum resistance with output ON	R_{ON}	---	15 (30)	25 (50)	Ω
	Current leakage when the relay is open	I_{LEAK}	---	0.0105 (0.003)	1.0	μA
	Capacity between terminals	C_{OFF}	---	85 (30)	---	pF
Capacity between I/O terminals		C_{I-O}	---	0.8	---	pF
Insulation resistance		R_{I-O}	1,000	---	---	M Ω
Turn-ON time		t_{ON}	---	0.1 (0.25)	1.0 (0.5)	ms
Turn-OFF time		t_{OFF}	---	1.0 (0.5)	3.0 (0.1)	ms

Values in parentheses are for the G3VM-354C1/F1


■ Recommended Operating Conditions

Use the G3VM under the following conditions so that the Relay will operate properly.

Item	Symbol	Minimum	Typical	Maximum	Unit
Load voltage (AC peak/DC)	V_{DD}	---	---	280	V
Operating LED forward current	I_F	5	---	25	mA
Continuous load current (AC peak/DC)	I_O	---	---	150 (100)	mA
Operating temperature	T_a	-20	---	65	°C

Values in parentheses are for the G3VM-354C1/F1


Note: 2. Turn-ON and Turn-OFF Times




Engineering Data

G3VM-354C/F


LED forward current vs. Ambient temperature
IF - Ta

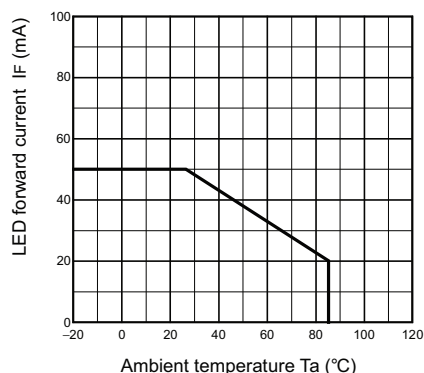


Continuous load current vs. Ambient temperature
IO - Ta

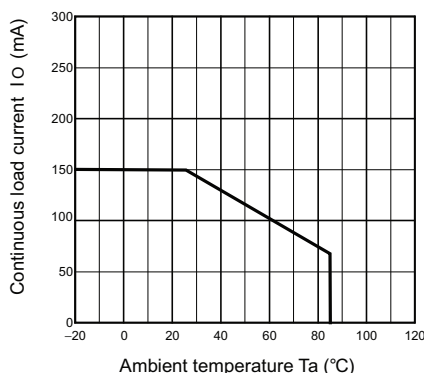


LED forward current vs. LED forward voltage
IF - VF

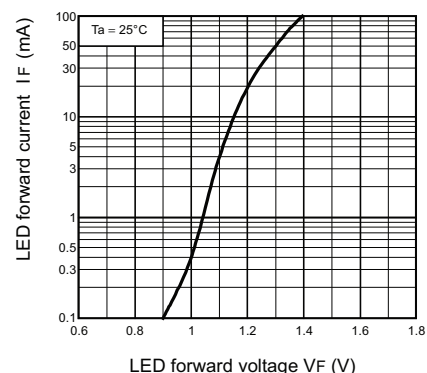


Continuous load current vs. On-state voltage
IO - VON

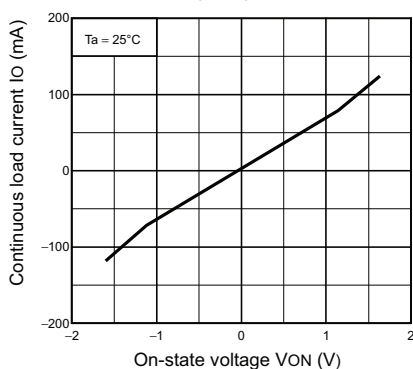


On-state resistance vs. Ambient temperature
RON - Ta

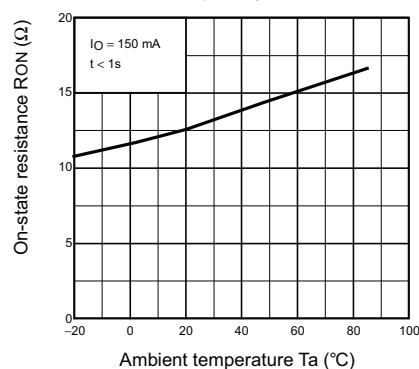


Trigger LED forward current vs. Ambient temperature
IFC - Ta

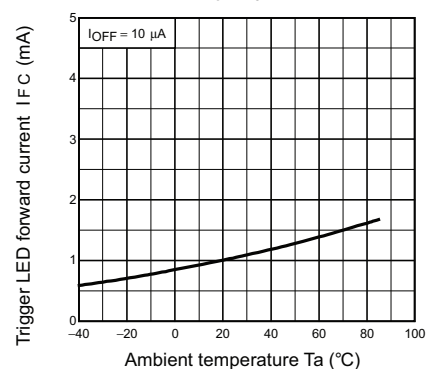


Turn ON, Turn OFF time vs. LED forward current
tON, tOFF - IF

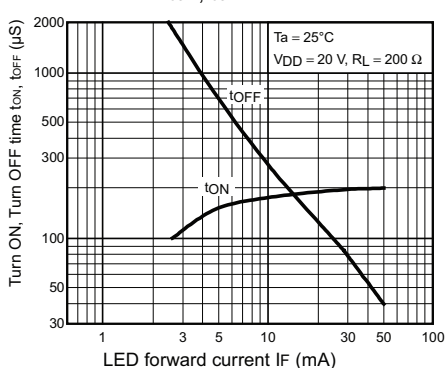

Turn ON, Turn OFF time vs. Ambient temperature
tON, tOFF - Ta

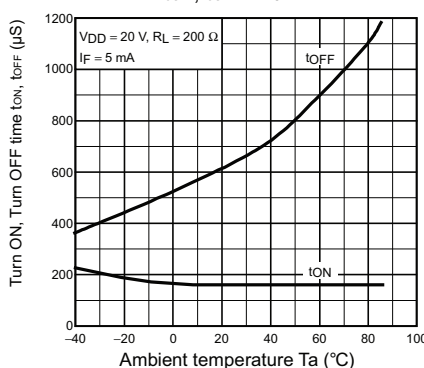


Current leakage vs. Ambient temperature
ILEAK - Ta

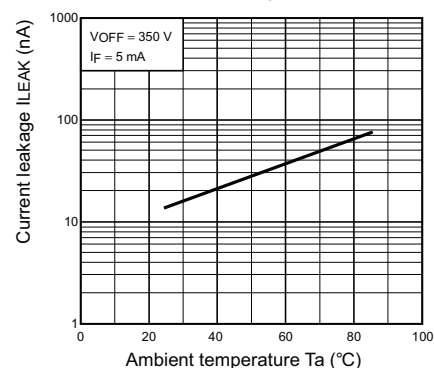


■ Engineering Data

G3VM-354C1/F1


LED forward current vs. Ambient temperature
 $I_F - T_a$

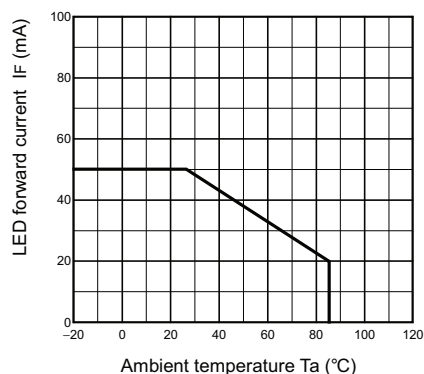


Continuous load current vs. Ambient temperature
 $I_O - T_a$

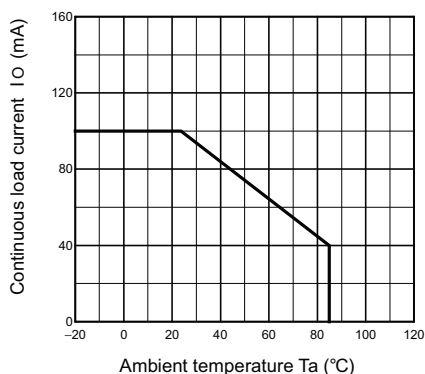


LED forward current vs. LED forward voltage
 $I_F - V_F$

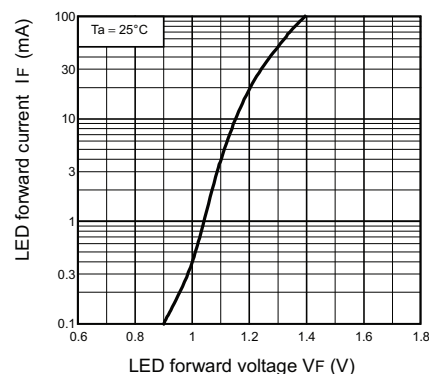


Continuous load current vs. On-state voltage
 $I_O - V_{ON}$

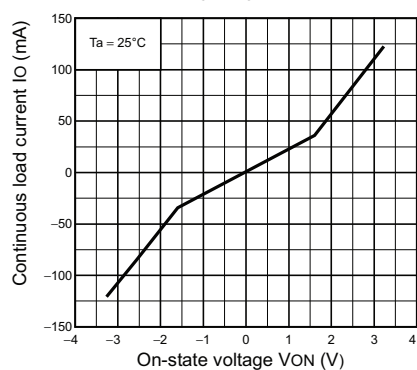


On-state resistance vs. Ambient temperature
 $R_{ON} - T_a$

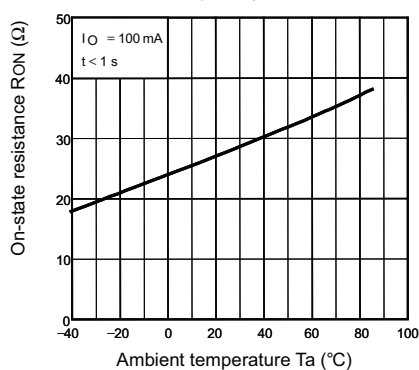


Trigger LED forward current vs. Ambient temperature
 $I_{FC} - T_a$

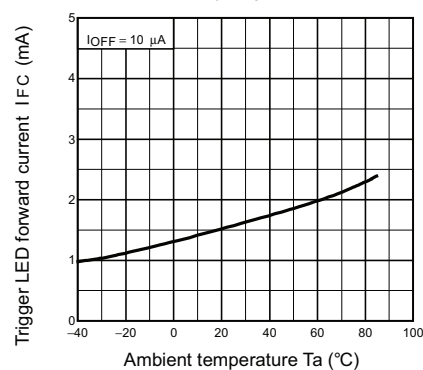


Turn ON, Turn OFF time vs. LED forward current
 $t_{ON}, t_{OFF} - I_F$

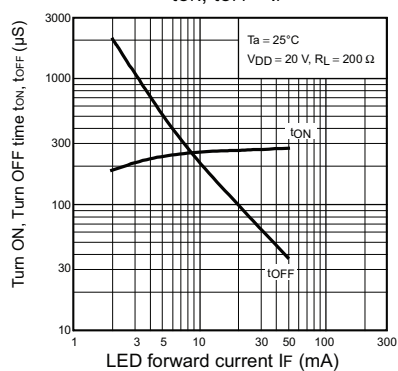

Turn ON, Turn OFF time vs. Ambient temperature
 $t_{ON}, t_{OFF} - T_a$

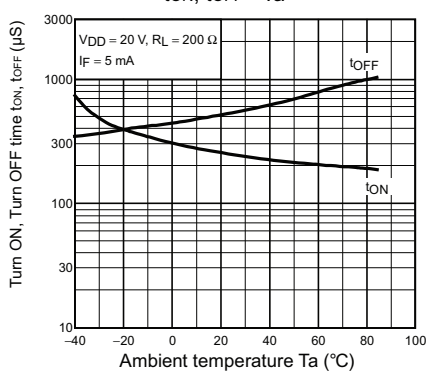

Current leakage vs. Ambient temperature
 $I_{LEAK} - T_a$

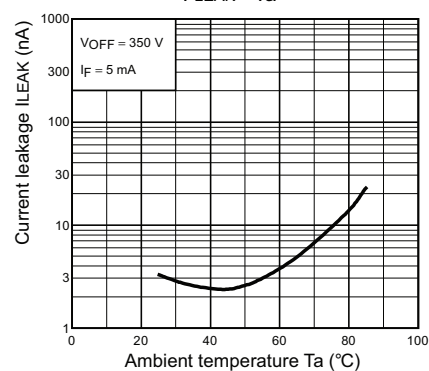

All sales are subject to Omron Electronic Components LLC standard terms and conditions of sale, which can be found at http://www.components.omron.com/components/web/webfiles.nsf/sales_terms.html

ALL DIMENSIONS SHOWN ARE IN MILLIMETERS.

To convert millimeters into inches, multiply by 0.03937. To convert grams into ounces, multiply by 0.03527.

OMRON[®]

**OMRON ELECTRONIC
COMPONENTS LLC**

55 E. Commerce Drive, Suite B
Schaumburg, IL 60173

847-882-2288

OMRON ON-LINE

Global - <http://www.omron.com>

USA - <http://www.components.omron.com>

Cat. No. X302-E-1

12/10

Specifications subject to change without notice

Printed in USA