MICRO SWITCH
a Honeywell Division
FED.MFG.CODE 91929

SWITCH - BASIC

CATALOG LISTING
V3-22
CK-A2201

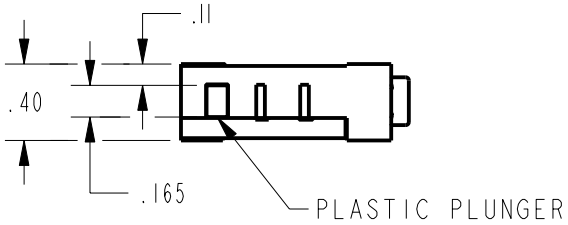

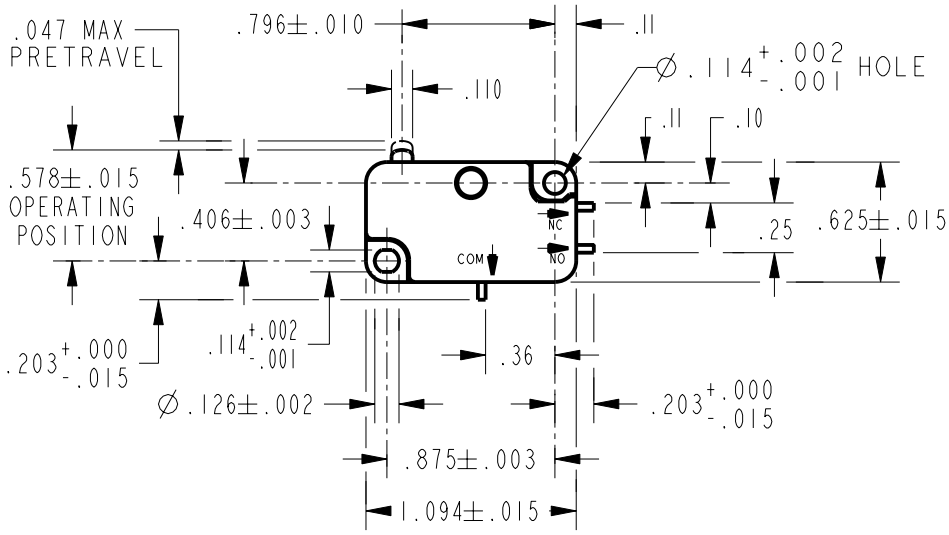

NOTES
1 - **NO HOLES IN TERMINALS**
2 - TERMINALS ARE PLATED
3 - SWITCH MATERIALS WILL WITHSTAND TEMPERATURE OF 300°F

ANSI Y14.5M-1982 APPLIES

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

THIRD ANGLE PROJECTION

CHARACTERISTICS		ELECTRICAL DATA	SCALE FULL	DO NOT SCALE PRINT
OPERATING FORCE	6-14 OZ	CONTACT ARRANGEMENT S P D T	UNLESS OTHERWISE SPECIFIED TOLERANCES ARE	
RELEASE FORCE	4 OZ MIN		ONE PLACE (.0)	±.030
DIFFERENTIAL TRAVEL	.006-.016	L83 15.1A 1/2HP 125, 250 VAC	TWO PLACE (.00)	±.015
OVERTRAVEL	.040 MIN	1/2A 125 VDC, 1/4A 250 VDC	THREE PLACE (.000)	±.005
FREE POSITION	.625 MAX	5A 125 VAC "L"	ANGLES	±
RELEASE TRAVEL	.007 MIN		WEIGHT .015 LB	

REVISIONS
A C095160 TSM 17JUN99

PTC/CAD 2D	DRAWN	TSM	17JUN99	CHECK	JAF	17JUN99	CHECK	CHECK	REPLACES X99284-V3
									RELEASE NO. PR-21675
									CATALOG LISTING V3-22
									PAGE 1 OF 1
									ISSUE 2

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Honeywell:

V3-22