



DASH NO.	M CODE	MADE FROM
----------	--------	-----------

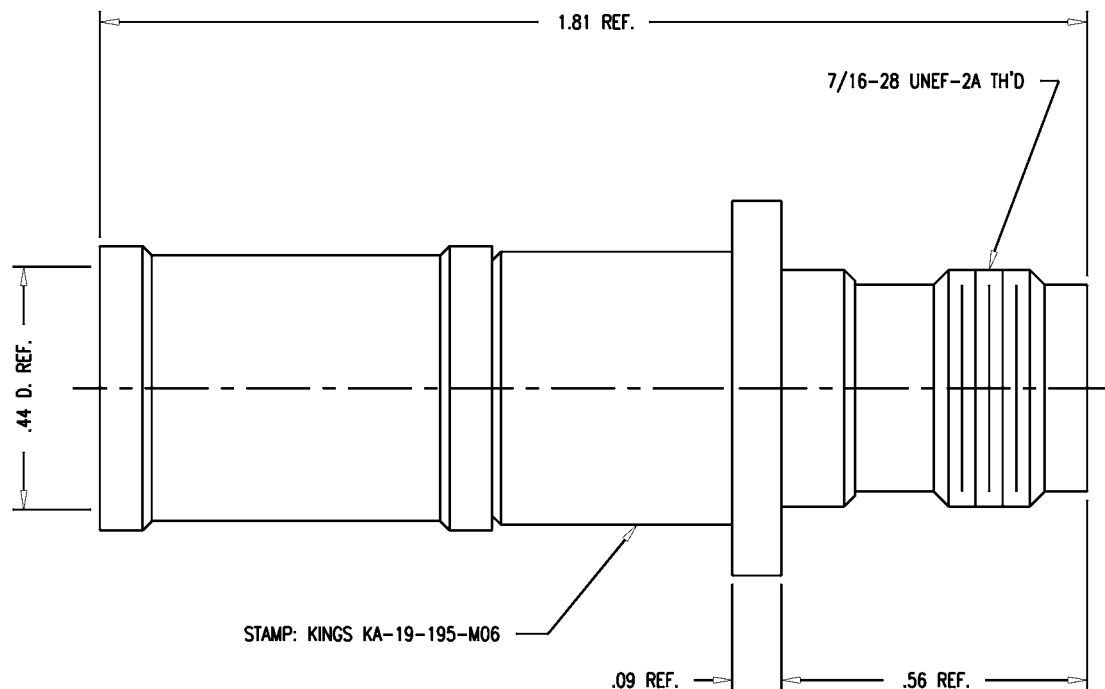

NOTES:

1. FOR USE WITH RG-9, 214 & BA-6903 CABLE.
2. FOR CABLING INSTRUCTIONS SEE CP-480.
3. FOR CABLE TRIMMING USE KTJ-137 & KTD-138.
4. FOR CRIMPING USE DIE KTH-1079.
5. INTERFACE PER MIL-STD-348, FIG. 313-2.
6. CENTER CONTACT (1-2288-2MA9) TO BE SUPPLIED UNASSEMBLED.
7. MAKE PACKAGE: KINGS KA-19-195-M06
XXXX (DATE CODE)
8. MATERIALS:
INSULATOR-TEFLON, ASTM-D-1457
CENTER CONTACT-BER. COP., ASTM-B-196
K-GRIP SLEEVE-COMMERCIAL BRONZE, ALLOY 220
ALL OTHER METAL PARTS-BRASS, ASTM-B16
9. FINISHES:
CENTER CONTACT-GOLD PLATE PER MIL-G-45204
ALL OTHER METAL PARTS-KINGS TARNISH RESISTANT FINISH (TR-5)
10. ELECTRICAL CHARACTERISTICS:
NOMINAL IMPEDANCE-50 OHMS
FREQUENCY RANGE-DC TO 11 MHz
WORKING VOLTAGE-500 VRMS

GSD

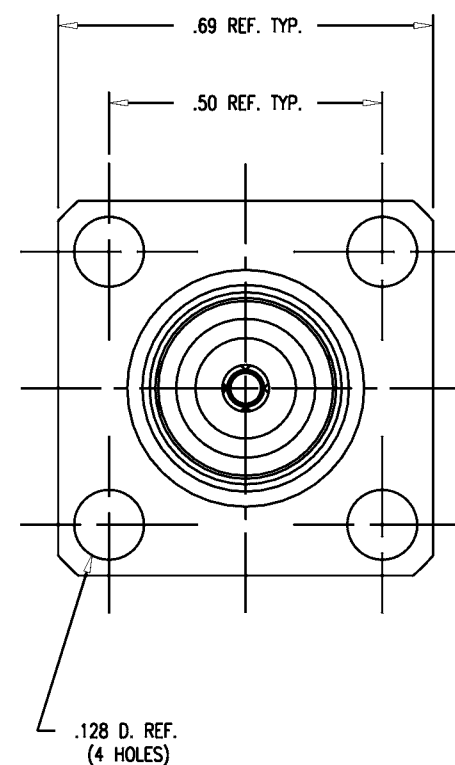

KA-19-195-M06

REVISIONS

ISSUE	CHANGES
5	CN 33212 A REDRAWN KH 07/19/91
6	CN 33427 E JCA 10/10/91

KAM1286

SCALE 4:1

APPROX SURFACE AREA

USED ON

REF: BOEING

JACK, PANEL, TNC

DRAWN KH	DATE 07/19/91
DESIGN LJ	DATE 07/19/91
APPR.	DATE

KINGS
ELECTRONICS CO., INC.
TUCKAHOE, NEW YORK 10707

KA-19-195-M06

GSD