

ALUMINUM ELECTROLYTIC CAPACITORS

nichicon

EP

Bi-Polarized, Wide Temperature Range

series

BP

Bi-polarized




Anti-Solvent
Feature

- Bi-polarized series for operations over wide temperature range of -55°C to $+105^{\circ}\text{C}$.
- Compliant to the RoHS directive (2011/65/EU).

EP


Wide
Temperature
VP

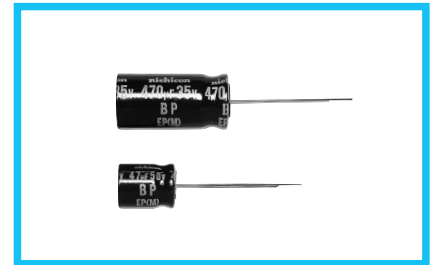

Specifications


Item	Performance Characteristics										
Category Temperature Range	-55 to +105°C										
Rated Voltage Range	6.3 to 100V										
Rated Capacitance Range	0.47 to 6800μF										
Capacitance Tolerance	±20% at 120Hz, 20°C										
Leakage Current	After 5 minutes' application of rated voltage at 20°C, leakage current is not more than 0.03CV or 3 (μA), whichever is greater.										
Tangent of loss angle (tan δ)	Measurement frequency : 120Hz, Temperature : 20°C										
	Rated voltage (V)	6.3	10	16	25	35	50	63	100		
	tan δ (MAX.)	0.24	0.24	0.20	0.20	0.16	0.14	0.12	0.10		
Stability at Low Temperature	Measurement frequency : 120Hz										
	Rated voltage (V)			6.3	10	16	25	35	50	63	100
	Impedance ratio	Z-25°C / Z+20°C			4	3	2	2	2	2	2
	ZT / Z20 (MAX.)	Z-40°C / Z+20°C			10	8	6	4	3	3	3
Endurance	The specifications listed at right shall be met when the capacitors are restored to 20°C after the rated voltage is applied for 1000 hours at 105°C with the polarity inverted every 250 hours.						Capacitance change		Within ±25% of the initial capacitance value (6.3to16V) Within ±20% of the initial capacitance value (25to100V)		
							tan δ		150% or less than the initial specified value		
							Leakage current		Less than or equal to the initial specified value		
Shelf Life	After storing the capacitors under no load at 105°C for 1000 hours and then performing voltage treatment based on JIS C 5101-4 clause 4.1 at 20°C, they shall meet the specified values for the endurance characteristics listed above.										
Marking	Printed with white color letter on black sleeve.										

Radial Lead Type

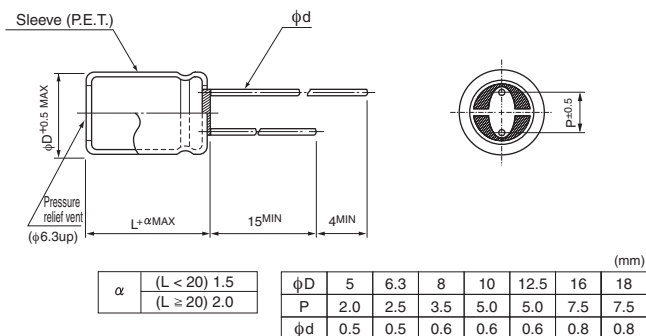

• Please refer to page 20 about the end seal configuration.

Type numbering system (Example : 10V 47 μF)

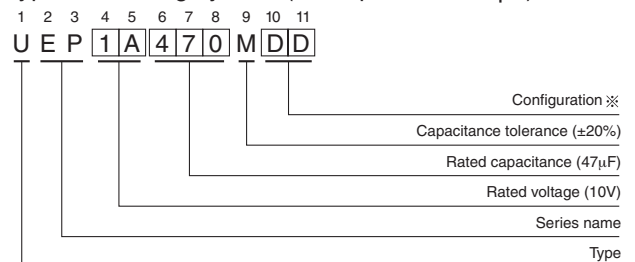

※ Configuration

ϕD	Pb-free leadwire Pb-free PET sleeve
5	DD
6.3	ED
8 - 10	PD
12.5 to 18	HD

Dimensions

Cap. (μF)	V	6.3	10	16	25	35	50	63	100
Code		0J	1A	1C	1E	1V	1H	1J	2A
0.47	R47						5 × 11	8	5 × 11
1	010						5 × 11	12	5 × 11
2.2	2R2						5 × 11	18	6.3 × 11
3.3	3R3						5 × 11	22	6.3 × 11
4.7	4R7					5 × 11	25	5 × 11	30
10	100			5 × 11	30	5 × 11	30	6.3 × 11	37
22	220		5 × 11	42	5 × 11	40	6.3 × 11	55	6.3 × 11
33	330	5 × 11	46	5 × 11	45	5 × 11	49	6.3 × 11	56
47	470	5 × 11	54	5 × 11	54	6.3 × 11	67	8 × 11.5	86
100	101	6.3 × 11	90	6.3 × 11	90	8 × 11.5	110	8 × 11.5	110
220	221	8 × 11.5	150	8 × 11.5	150	10 × 12.5	195	10 × 16	215
330	331	8 × 11.5	185	10 × 16	240	10 × 16	265	12.5 × 20	320
470	471	10 × 12.5	260	10 × 16	290	10 × 20	345	12.5 × 20	380
1000	102	10 × 20	460	12.5 × 20	510	12.5 × 25	605	16 × 25	670
2200	222	12.5 × 25	820	16 × 25	910	16 × 31.5	1070	18 × 35.5	1140
3300	332	16 × 25	1110	16 × 31.5	1200	18 × 35.5	1400		
4700	472	16 × 31.5	1430	18 × 35.5	1520				
6800	682	18 × 35.5	1830						

Frequency coefficient of rated ripple current

Cap. (μF)	Frequency	50 Hz	120Hz	300 Hz	1 kHz	10 kHz or more
0.47 to 47		0.75	1.00	1.35	1.57	2.00
100 to 470		0.80	1.00	1.23	1.34	1.50
1000 to 6800		0.85	1.00	1.10	1.13	1.15

Rated ripple current (mA rms) at 105°C 120Hz

Please refer to page 20, 21, 22 about the formed or taped product spec.
Please refer to page 4 for the minimum order quantity.

CAT.8100D

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Nichicon:

[UEP2A3R3MED1TD](#) [UEP2A4R7MED1TA](#) [UEP1H4R7MDD1TA](#) [UEP1C471MPD1TD](#) [UEP2A470MHD1TO](#)
[UEP1H010MDD1TA](#) [UEP1C330MDD1TD](#) [UEP0J102MPD1TD](#) [UEP1E101MPD1TD](#) [UEP1A470MDD](#)
[UEP1E220MED1TA](#) [UEP1H100MED1TA](#) [UEP0J221MPD1TD](#) [UEP0J101MED1TD](#) [UEP1H100MED1TD](#)
[UEP0J101MED1TA](#) [UEP2A220MPD1TD](#) [UEP2A100MPD1TA](#) [UEP2A100MPD1TD](#) [UEP1J470MPD1TD](#)
[UEP1H2R2MDD1TD](#)