



SPECIFICATIONS

• CONSTRUCTION


External boot for double sealing on IP switch.
Available in black or transparent silicone.

• MATERIALS

Silicone rubber (55 ShA)

• MECHANICAL AND ENVIRONMENTAL CHARACTERISTICS

Operating Temperature : -40°C to +125°C
Life : 500.000 cycles (operated with finger)
Sealing : IP67 according to CEI529

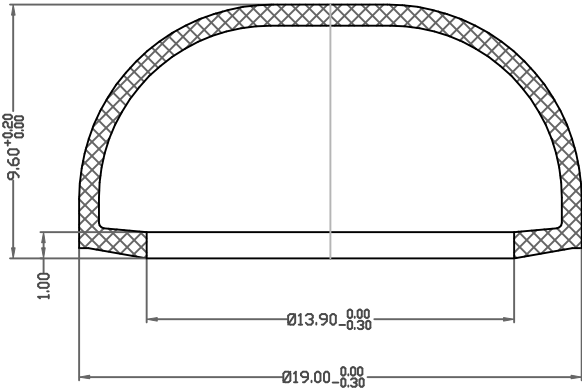

Ref.	U5125	U5125-2	U5125-6
Material	Transparent Silicone (175D)	Black Silicone ALC 5068/V	Red Silicone RAL3020

				MATERIAL: /	 Unité INTERRUPTEURS 55,av. E.HERRIOT BP 1 82303 CAUSSADE CEDEX Tél.05.63.93.14.98 - Télécopie.05.63.93.19.03	DRAWN: Moreau.C
				TREATMENT: /		DATE : 16.03.99
				FINISH: /		CHECKED: D.Sire
				Scale: 5 		Reference U5125S
B	Ajout U5125-6 Red silicone RAL3020	16.9.05	Ricard			Code Nbr. /
A	Cotes de 9.00 à 9.60 et Ø18.30 à 19.00	31.1.05	Ricard			
Issue Modifications		Date Name		EXTERNAL BOOT IP SERIES		

This document is the property of APEM and may not be copied or used for any purpose without written authority.Dimensions and data shown in this specification are subject to change without notice.