

HLMP-ADxx/AGxx/ALxx/BDxx/BGxx/BLxx

5mm mini Oval Precision Optical Performance

AlInGaP Lamps



Data Sheet



Lead (Pb) Free
RoHS 6 fully
compliant



Description

These Precision Optical Performance Oval LEDs are specifically designed for full color/video and passenger information signs. The oval shaped radiation pattern (35° x 70°) and high luminous intensity ensure that these devices are excellent for wide field of view outdoor application where a wide viewing angle and readability in sunlight are essential. These lamps have very smooth, matched radiation patterns ensuring consistent color mixing in full color applications, message uniformity across the viewing angle of the sign.

High efficiency LED material is used in these lamps: Aluminum Indium Gallium Phosphide (AlInGaP) for amber and red. Each lamp is made with an advance optical grade epoxy offering superior high temperature and high moisture resistance in outdoor applications. The package epoxy contains both UV-A and UV-B inhibitors to reduce the effects of long term exposure to direct sunlight.

Designers can select parallel or perpendicular orientation. Both lamps are available in tinted version.

Benefits

- Viewing angle designed for wide field of view application
- Superior performance in outdoor environments

Features

- Well defined spatial radiation pattern
- Viewing angles:
Major axis 70°
Minor axis 35°
- High luminous output
- Red and Amber intensity are available for:
AlInGaP (Bright)
AlInGaP II (Brightest)
- Colors:
626 nm red
630 nm red
590 nm amber
592 nm amber
- Superior resistance to moisture
- UV resistant epoxy

Applications

- Full color/video signs

Table 1. Device Selection Guide for AlInGaP II

Part Number	Color and Dominant Wavelength λ_d (nm) Typ.	Luminous Intensity I_v (mcd) at 20 mA Min.	Luminous Intensity I_v (mcd) at 20 mA Max.	Stand-Off	Leadframe Orientation	Package Drawing
HLMP-AD06-NSTxx	Red 630	680	2500	No	Parallel	A
HLMP-AD06-P00xx	Red 630	880		No	Parallel	A
HLMP-AD06-P0Txx	Red 630	880		No	Parallel	A
HLMP-AD06-PQ0xx	Red 630	880	1500	No	Parallel	A
HLMP-AD06-RSTxx	Red 630	1500	2500	No	Parallel	A
HLMP-AD06-STTxx	Red 630	1900	3200	No	Parallel	A
HLMP-AD16-P00xx	Red 630	880		Yes	Parallel	B
HLMP-AD16-QTTxx	Red 630	1150	3200	Yes	Parallel	B
HLMP-AD16-RS0xx	Red 630	1500	2500	Yes	Parallel	B
HLMP-AD16-RSTxx	Red 630	1500	2500	Yes	Parallel	B
HLMP-AD16-RUTxx	Red 630	1500	4200	Yes	Parallel	B
HLMP-AD16-ST0xx	Red 630	1900	3200	Yes	Parallel	B
HLMP-AD16-STTxx	Red 630	1900	3200	Yes	Parallel	B
HLMP-AL16-RSRxx	Amber 592	1500	2500	Yes	Parallel	B
HLMP-AL16-RSKxx	Amber 592	1500	2500	Yes	Parallel	B
HLMP-BD06-L00xx	Red 630	400		No	Perpendicular	C
HLMP-BD06-P00xx	Red 630	880		No	Perpendicular	C
HLMP-BD06-RS0xx	Red 630	1500	2500	No	Perpendicular	C
HLMP-BD06-RSTxx	Red 630	1500	2500	No	Perpendicular	C
HLMP-BD06-STTxx	Red 630	1900	3200	No	Perpendicular	C
HLMP-BD16-NP0xx	Red 630	680	1150	Yes	Perpendicular	D
HLMP-BD16-QRTxx	Red 630	1150	1900	Yes	Perpendicular	D
HLMP-BD16-RU0xx	Red 630	1500	4200	Yes	Perpendicular	D
HLMP-BD16-RUTxx	Red 630	1500	4200	Yes	Perpendicular	D
HLMP-BD16-ST0xx	Red 630	1900	3200	Yes	Perpendicular	D
HLMP-BD16-STTxx	Red 630	1900	3200	Yes	Perpendicular	D
HLMP-BL06-N00xx	Amber 592	680		No	Perpendicular	C

Table 2. Device Selection Guide for AlInGaP

Part Number	Color and Dominant Wavelength λ_d (nm) Typ.	Luminous Intensity I_v (mcd) at 20 mA Min.	Luminous Intensity I_v (mcd) at 20 mA Max.	Stand-Off	Leadframe Orientation	Package Drawing
HLMP-AG01-K00xx	Red 626	310		No	Parallel	A
HLMP-AL01-L00xx	Amber 590	400		No	Parallel	A
HLMP-AL01-LP0xx	Amber 590	400	1150	No	Parallel	A
HLMP-AL01-N00xx	Amber 590	680		No	Parallel	A
HLMP-AL01-NR0xx	Amber 590	680	1900	No	Parallel	A
HLMP-AL01-PQKxx	Amber 590	880	1150	No	Parallel	A
HLMP-AL11-NR0xx	Amber 590	880	1900	Yes	Parallel	B
HLMP-BG01-LM0xx	Red 626	400	520	No	Perpendicular	C
HLMP-BG01-MN0xx	Red 626	520	680	No	Perpendicular	C
HLMP-BL01-NR0xx	Red 626	680	1900	No	Perpendicular	C
HLMP-BL11-KN0xx	Red 626	310	880	Yes	Perpendicular	D
HLMP-BL11-NR0xx	Red 626	680	1900	Yes	Perpendicular	D

Part Numbering System

HLMP - X X X X - X X X XX

Mechanical Options

00: Bulk Packaging
DD: Ammo Pack
YY: Flexi-Bin; Bulk Packaging
ZZ: Flexi-Bin; Ammo Pack

Color Bin

0: No Color Bin Limitation
B: Color bin 2 and 3 only
K: Color bins 2 and 4 only
R: Color Bins 1, 2, 4, and 6 with VF max of 2.6 V
S: Color bins 2 and 4 with VF max of 2.6 V
T: Red Color with V_F max of 2.6 V

Maximum Intensity Bin

0: No Iv Bin Limitation

Minimum Intensity Bin

Tint Option

1 or 6: Matching Color Tints

Standoff Option

0: Without
1: With

Color


D: 630 nm Red
G: 626 nm Red
L: 590 or 592 nm Amber

Package

A: 5 mm Mini Oval, Parallel
B: 5 mm Mini Oval, Perpendicular

Note: Please refer to AB 5337 for complete information on part numbering system.

Package Dimensions

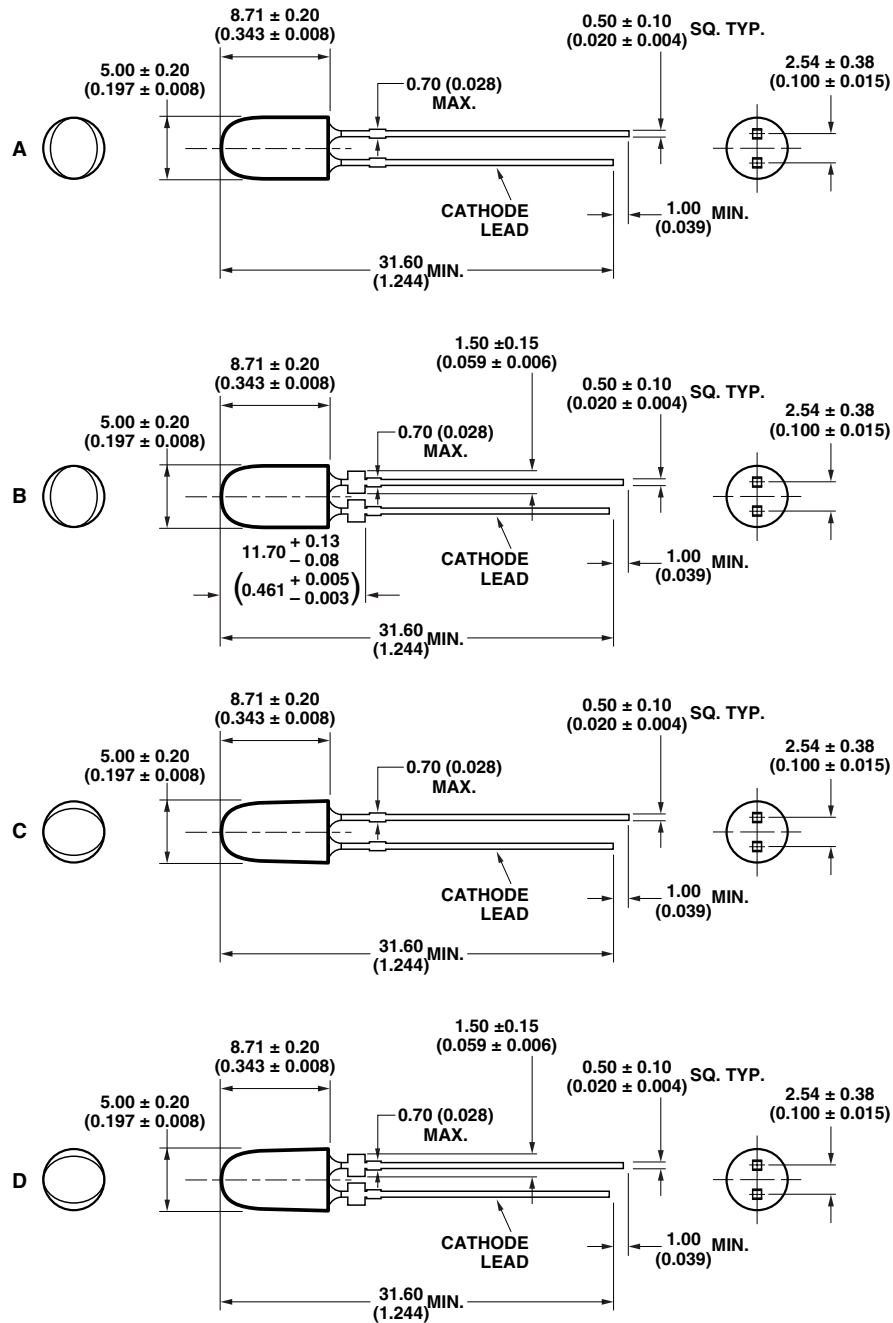

NOTES:

- ALL DIMENSIONS ARE IN MILLIMETERS (INCHES).
- TAPERS SHOWN AT TOP OF LEADS (BOTTOM OF LAMP PACKAGE) INDICATE AN EPOXY MENISCUS THAT MAY EXTEND ABOUT 1 mm (0.040 IN.) DOWN THE LEADS.
- RECOMMENDED PC BOARD HOLE DIAMETERS:
 - LAMP PACKAGES A AND C WITHOUT STAND-OFFS: FLUSH MOUNTING AT BASE OF LAMP PACKAGE = 1.143/1.067 mm (0.044/0.042 IN.).
 - LAMP PACKAGES B AND D WITH STAND-OFFS: MOUNTING AT LEAD STAND-OFFS.

Absolute Maximum Ratings at $T_A = 25^\circ\text{C}$

Parameter	Red and Amber
DC Forward Current ^[1]	50 mA
Peak Pulsed Forward Current ^[2]	100 mA
Average Forward Current	30 mA
Reverse Voltage ($I_R = 100\ \mu\text{A}$)	5 V
Power Dissipation	120 mW
LED Junction Temperature	130°C
Operating Temperature Range	-40°C to +100°C
Storage Temperature Range	-40°C to +100°C

Notes:

1. Derate linearly as shown in figure 4.
2. Duty Factor 30%, Frequency 1kHz.

Electrical/Optical Characteristics at $T_A = 25^\circ\text{C}$

Parameter	Symbol	Min.	Typ.	Max.	Units	Test Conditions
Typical Viewing Angle						
Major	$2\theta_{1/2}$		70		deg	
Minor			35			
Forward Voltage	V_F				V	$I_F = 20\ \text{mA}$
Red ($\lambda_d = 626\ \text{nm}$)			2.0	2.4		
Red ($\lambda_d = 630\ \text{nm}$)						
Option xx0xx			2.2	2.4		
Option xxTxx			2.3	2.6		
Amber ($\lambda_d = 590\ \text{nm}$)			2.0	2.4		
Amber ($\lambda_d = 592\ \text{nm}$)						
Option xx0xx			2.2	2.4		
Option xxRxx, xxSxx			2.3	2.6		
Reverse Voltage						
Amber, Red	V_R	5	20		V	$I_R = 100\ \mu\text{A}$
Peak Wavelength						
Amber ($\lambda_d = 592\ \text{nm}$)	λ_{peak}		594		nm	Peak of Wavelength of Spectral Distribution at $I_F = 20\ \text{mA}$
Red ($\lambda_d = 630\ \text{nm}$)			639			
Spectral Halfwidth						
Amber ($\lambda_d = 592\ \text{nm}$)	$\Delta\lambda_{1/2}$		17		nm	Wavelength Width at Spectral Distribution 1/2 Power Point at $I_F = 20\ \text{mA}$
Red ($\lambda_d = 630\ \text{nm}$)			17			
Capacitance						$V_F = 0, F = 1\ \text{MHz}$
Amber, Red	C		40		pF	
Luminous Efficacy						Emitted Luminous Power/Emitted Radiant Power at $I_F = 20\ \text{mA}$
Amber ($\lambda_d = 592\ \text{nm}$)	η_v		500		lm/W	
Red ($\lambda_d = 630\ \text{nm}$)			155			
Thermal Resistance	$R\Theta_{J-PIN}$		240		°C/W	LED Junction-to-Cathode Lead

Notes:

1. $2\theta_{1/2}$ is the off-axis angle where the luminous intensity is 1/2 the on-axis intensity.
2. The radiant intensity, I_e in watts per steradian, may be found from the equation $I_e = I_v/\eta_v$, where I_v is the luminous intensity in candelas and η_v is the luminous efficacy in lumens/watt.
3. The luminous intensity is measured on the mechanical axis of the lamp package.
4. The optical axis is closely aligned with the package mechanical axis.
5. The dominant wavelength, λ_d , is derived from the CIE Chromaticity Diagram and represents the color of the lamp.
6. For Options -xxRxx, -xxSxx and -xxTxx, max. forward voltage (V_f) is 2.6 V. Refer to V_f bin table.

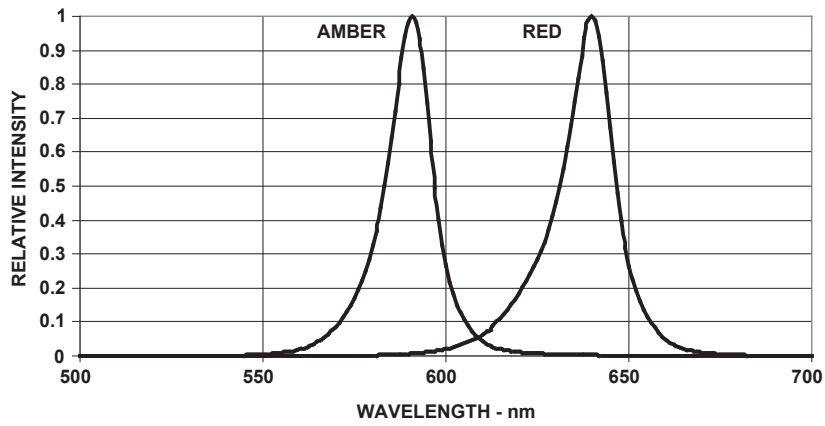


Figure 1. Relative intensity vs. wavelength.

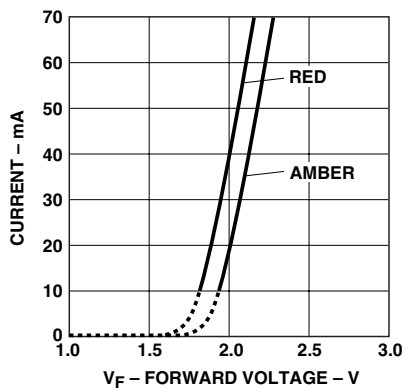


Figure 2a. Amber, red forward current vs. forward voltage.

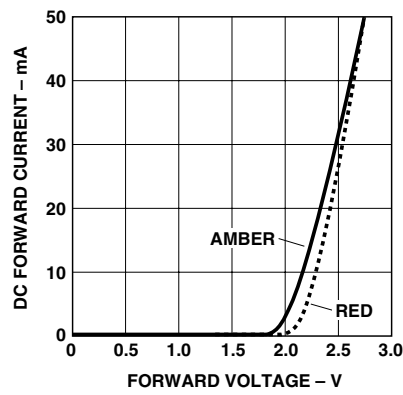


Figure 2b. Forward current vs. forward voltage for option -xxTxx red, and option -xxRxx and -xxSxx amber.

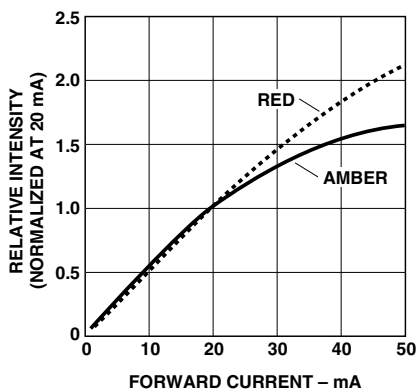


Figure 3. Amber, red relative luminous intensity vs. forward current.

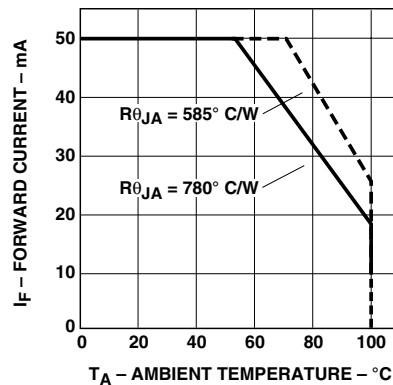


Figure 4. Amber, red maximum forward current vs. ambient temperature.

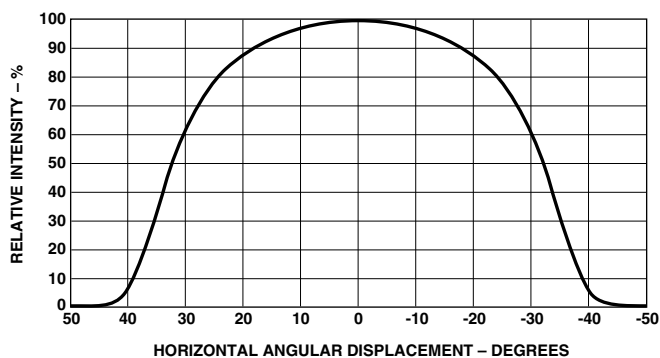
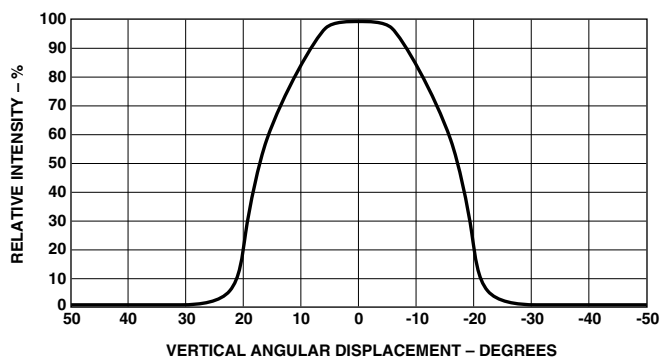


Figure 5. Spatial radiation pattern – 35 x 70 degree lamps.

Intensity Bin Limits (mcd at 20 mA)

Bin Name	Min.	Max.
K	310	400
L	400	520
M	520	680
N	680	880
P	880	1150
Q	1150	1500
R	1500	1900
S	1900	2500
T	2500	3200
U	3200	4200

Tolerance for each bin limit is $\pm 15\%$.

Amber Color Bin Limits (nm at 20 mA)

Bin Name	Min.	Max.
1	584.5	587.0
2	587.0	589.5
4	589.5	592.0
6	592.0	594.5

Tolerance for each bin limit is ± 0.5 nm.

Vf Bin Table [2,3]

Bin Id	Min.	Max.
VA	2.0	2.2
VB	2.2	2.4
VC	2.4	2.6

Notes:

1. All bin categories are established for classification of products. Products may not be available in all bin categories. Please contact your Avago representative for further information.
2. Vf bin table only available for those numbers with options -xxRxx, -xxSxx, -xxTxx.
3. Tolerance for each bin limit is $\pm 0.05V$


Precautions:

Lead Forming:

- The leads of an LED lamp may be preformed or cut to length prior to insertion and soldering on PC board.
- For better control, it is recommended to use proper tool to precisely form and cut the leads to applicable length rather than doing it manually.
- If manual lead cutting is necessary, cut the leads after the soldering process. The solder connection forms a mechanical ground which prevents mechanical stress due to lead cutting from traveling into LED package. This is highly recommended for hand solder operation, as the excess lead length also acts as small heat sink.

Soldering and Handling:

- Care must be taken during PCB assembly and soldering process to prevent damage to the LED component.
- LED component may be effectively hand soldered to PCB. However, it is only recommended under unavoidable circumstances such as rework. The closest manual soldering distance of the soldering heat source (soldering iron's tip) to the body is 1.59mm. Soldering the LED using soldering iron tip closer than 1.59mm might damage the LED.



- ESD precaution must be properly applied on the soldering station and personnel to prevent ESD damage to the LED component that is ESD sensitive. Do refer to Avago application note AN 1142 for details. The soldering iron used should have grounded tip to ensure electrostatic charge is properly grounded.
- Recommended soldering condition:

	Wave Soldering [1, 2]	Manual Solder Dipping
Pre-heat temperature	105 °C Max.	-
Preheat time	60 sec Max	-
Peak temperature	250 °C Max.	260 °C Max.
Dwell time	3 sec Max.	5 sec Max


Note:

- 1) Above conditions refers to measurement with thermocouple mounted at the bottom of PCB.
 - 2) It is recommended to use only bottom preheaters in order to reduce thermal stress experienced by LED.
- Wave soldering parameters must be set and maintained according to the recommended temperature and dwell time. Customer is advised to perform daily check on the soldering profile to ensure that it is always conforming to recommended soldering conditions.

Note:

1. PCB with different size and design (component density) will have different heat mass (heat capacity). This might cause a change in temperature experienced by the board if same wave soldering setting is used. So, it is recommended to re-calibrate the soldering profile again before loading a new type of PCB.
2. Avago Technologies' high brightness LED are using high efficiency LED die with single wire bond as shown below. Customer is advised to take extra precaution during wave soldering to ensure that the maximum wave temperature does not exceed 250°C and the solder contact time does not exceeding 3sec. Over-stressing the LED during soldering process might cause premature failure to the LED due to delamination.

Avago Technologies LED configuration




Note: Electrical connection between bottom surface of LED die and the lead frame is achieved through conductive paste.

- Any alignment fixture that is being applied during wave soldering should be loosely fitted and should not apply weight or force on LED. Non metal material is recommended as it will absorb less heat during wave soldering process.
- At elevated temperature, LED is more susceptible to mechanical stress. Therefore, PCB must allowed to cool down to room temperature prior to handling, which includes removal of alignment fixture or pallet.
- If PCB board contains both through hole (TH) LED and other surface mount components, it is recommended that surface mount components be soldered on the top side of the PCB. If surface mount need to be on the bottom side, these components should be soldered using reflow soldering prior to insertion the TH LED.
- Recommended PC board plated through holes (PTH) size for LED component leads.

LED component lead size	Diagonal	Plated through hole diameter
0.45 x 0.45 mm (0.018x 0.018 inch)	0.636 mm (0.025 inch)	0.98 to 1.08 mm (0.039 to 0.043 inch)
0.50 x 0.50 mm (0.020x 0.020 inch)	0.707 mm (0.028 inch)	1.05 to 1.15 mm (0.041 to 0.045 inch)

- Over-sizing the PTH can lead to twisted LED after clinching. On the other hand under sizing the PTH can cause difficulty inserting the TH LED.

Example of Wave Soldering Temperature Profile for TH LED



Technical drawing of a 3-pin LED package showing top and side views with dimensions in millimeters.

Top View Dimensions:

- Pin pitch: 12.70 ± 1.00 / 0.50 ± 0.0394
- Pin width: 6.35 ± 1.30 / 0.25 ± 0.0512
- Package width: 18.00 ± 0.50 / 0.7087 ± 0.0197
- Distance from package edge to pin center: 9.125 ± 0.625 / 0.3593 ± 0.0246
- Distance from package edge to pin center (alternative): 12.70 ± 0.30 / 0.50 ± 0.0118
- Distance between pin centers: 12.70 ± 1.00 / 0.50 ± 0.0394
- Distance from package edge to pin center (alternative): 12.70 ± 0.30 / 0.50 ± 0.0118

Side View Dimensions:


- Package height: 20.5 ± 1.00 / 0.8071 ± 0.0394
- Pin height: 18.00 ± 0.50 / 0.7087 ± 0.0197
- Pin diameter: $\phi 4.00 \pm 0.20$ / 0.1575 ± 0.008 TYP.

Other Features:

- Pin 1 is labeled "CATHODE".
- Pin 2 is labeled "ANODE".
- Pin 3 is labeled "COMMON".
- Pin 4 is labeled "COMMON".
- Pin 5 is labeled "COMMON".
- Pin 6 is labeled "COMMON".
- Pin 7 is labeled "COMMON".
- Pin 8 is labeled "COMMON".
- Pin 9 is labeled "COMMON".
- Pin 10 is labeled "COMMON".
- Pin 11 is labeled "COMMON".
- Pin 12 is labeled "COMMON".
- Pin 13 is labeled "COMMON".
- Pin 14 is labeled "COMMON".
- Pin 15 is labeled "COMMON".
- Pin 16 is labeled "COMMON".
- Pin 17 is labeled "COMMON".
- Pin 18 is labeled "COMMON".
- Pin 19 is labeled "COMMON".
- Pin 20 is labeled "COMMON".
- Pin 21 is labeled "COMMON".
- Pin 22 is labeled "COMMON".
- Pin 23 is labeled "COMMON".
- Pin 24 is labeled "COMMON".
- Pin 25 is labeled "COMMON".
- Pin 26 is labeled "COMMON".
- Pin 27 is labeled "COMMON".
- Pin 28 is labeled "COMMON".
- Pin 29 is labeled "COMMON".
- Pin 30 is labeled "COMMON".
- Pin 31 is labeled "COMMON".
- Pin 32 is labeled "COMMON".
- Pin 33 is labeled "COMMON".
- Pin 34 is labeled "COMMON".
- Pin 35 is labeled "COMMON".
- Pin 36 is labeled "COMMON".
- Pin 37 is labeled "COMMON".
- Pin 38 is labeled "COMMON".
- Pin 39 is labeled "COMMON".
- Pin 40 is labeled "COMMON".
- Pin 41 is labeled "COMMON".
- Pin 42 is labeled "COMMON".
- Pin 43 is labeled "COMMON".
- Pin 44 is labeled "COMMON".
- Pin 45 is labeled "COMMON".
- Pin 46 is labeled "COMMON".
- Pin 47 is labeled "COMMON".
- Pin 48 is labeled "COMMON".
- Pin 49 is labeled "COMMON".
- Pin 50 is labeled "COMMON".
- Pin 51 is labeled "COMMON".
- Pin 52 is labeled "COMMON".
- Pin 53 is labeled "COMMON".
- Pin 54 is labeled "COMMON".
- Pin 55 is labeled "COMMON".
- Pin 56 is labeled "COMMON".
- Pin 57 is labeled "COMMON".
- Pin 58 is labeled "COMMON".
- Pin 59 is labeled "COMMON".
- Pin 60 is labeled "COMMON".
- Pin 61 is labeled "COMMON".
- Pin 62 is labeled "COMMON".
- Pin 63 is labeled "COMMON".
- Pin 64 is labeled "COMMON".
- Pin 65 is labeled "COMMON".
- Pin 66 is labeled "COMMON".
- Pin 67 is labeled "COMMON".
- Pin 68 is labeled "COMMON".
- Pin 69 is labeled "COMMON".
- Pin 70 is labeled "COMMON".
- Pin 71 is labeled "COMMON".
- Pin 72 is labeled "COMMON".
- Pin 73 is labeled "COMMON".
- Pin 74 is labeled "COMMON".
- Pin 75 is labeled "COMMON".
- Pin 76 is labeled "COMMON".
- Pin 77 is labeled "COMMON".
- Pin 78 is labeled "COMMON".
- Pin 79 is labeled "COMMON".
- Pin 80 is labeled "COMMON".
- Pin 81 is labeled "COMMON".
- Pin 82 is labeled "COMMON".
- Pin 83 is labeled "COMMON".
- Pin 84 is labeled "COMMON".
- Pin 85 is labeled "COMMON".
- Pin 86 is labeled "COMMON".
- Pin 87 is labeled "COMMON".
- Pin 88 is labeled "COMMON".
- Pin 89 is labeled "COMMON".
- Pin 90 is labeled "COMMON".
- Pin 91 is labeled "COMMON".
- Pin 92 is labeled "COMMON".
- Pin 93 is labeled "COMMON".
- Pin 94 is labeled "COMMON".
- Pin 95 is labeled "COMMON".
- Pin 96 is labeled "COMMON".
- Pin 97 is labeled "COMMON".
- Pin 98 is labeled "COMMON".
- Pin 99 is labeled "COMMON".
- Pin 100 is labeled "COMMON".

10

Packaging Box for Ammo Packs

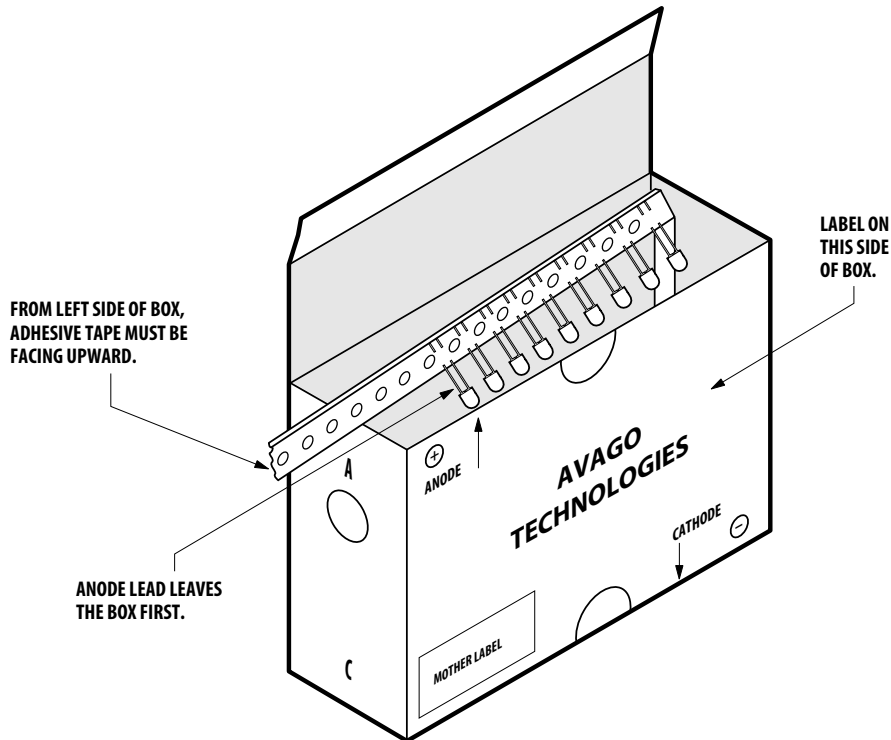

Note: For InGaN device, the ammo pack packaging box contains ESD logo.

Packaging Label

(i) Avago Mother Label: (Available on packaging box of ammo pack and shipping box)

Avago TECHNOLOGIES STANDARD LABEL LS0002 RoHS Compliant e3 max temp 250C	
(1P) Item: Part Number	(Q) QTY: Quantity
(1T) Lot: Lot Number	CAT: Intensity Bin
LPN:	BIN: Refer to below information
(9D)MFG Date: Manufacturing Date	
(P) Customer Item: (V) Vendor ID:	
(9D) Date Code: Date Code	
DeptID:	Made In: Country of Origin

(ii) Avago Baby Label (Only available on bulk packaging)

Avago TECHNOLOGIES		RoHS Compliant e3 max temp 250C	
Lamps Baby Label			
(1P) PART #: Part Number 			
(1T) LOT #: Lot Number 			
(9D)MFG DATE: Manufacturing Date 		QUANTITY: Packing Quantity 	
C/O: Country of Origin			
Customer P/N: 		CAT: Intensity Bin 	
Supplier Code: 		BIN: Refer to below information 	
		DATECODE: Date Code 	

Acronyms and Definition:

BIN:

(i) Color bin only or VF bin only

(Applicable for part number with color bins but without VF bin OR part number with VF bins and no color bin)

OR

(ii) Color bin incorporated with VF Bin

(Applicable for part number that have both color bin and VF bin)

Example:


(i) Color bin only or VF bin only

BIN: 2 (represent color bin 2 only)

BIN: VB (represent VF bin "VB" only)

(ii) Color bin incorporate with VF Bin

BIN: 2VB



DISCLAIMER: AVAGO'S PRODUCTS AND SOFTWARE ARE NOT SPECIFICALLY DESIGNED, MANUFACTURED OR AUTHORIZED FOR SALE AS PARTS, COMPONENTS OR ASSEMBLIES FOR THE PLANNING, CONSTRUCTION, MAINTENANCE OR DIRECT OPERATION OF A NUCLEAR FACILITY OR FOR USE IN MEDICAL DEVICES OR APPLICATIONS. CUSTOMER IS SOLELY RESPONSIBLE, AND WAIVES ALL RIGHTS TO MAKE CLAIMS AGAINST AVAGO OR ITS SUPPLIERS, FOR ALL LOSS, DAMAGE, EXPENSE OR LIABILITY IN CONNECTION WITH

For product information and a complete list of distributors, please go to our web site: www.avagotech.com

Avago, Avago Technologies, and the A logo are trademarks of Avago Technologies in the United States and other countries. Data subject to change. Copyright © 2005-2008 Avago Technologies. All rights reserved. Obsoletes 5989-1903EN AV02-1542EN - September 16, 2008

Avago
TECHNOLOGIES