

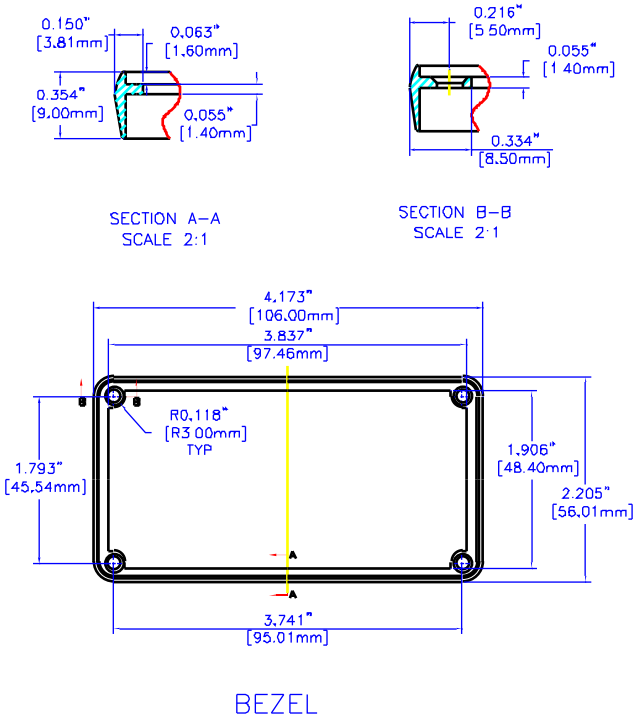
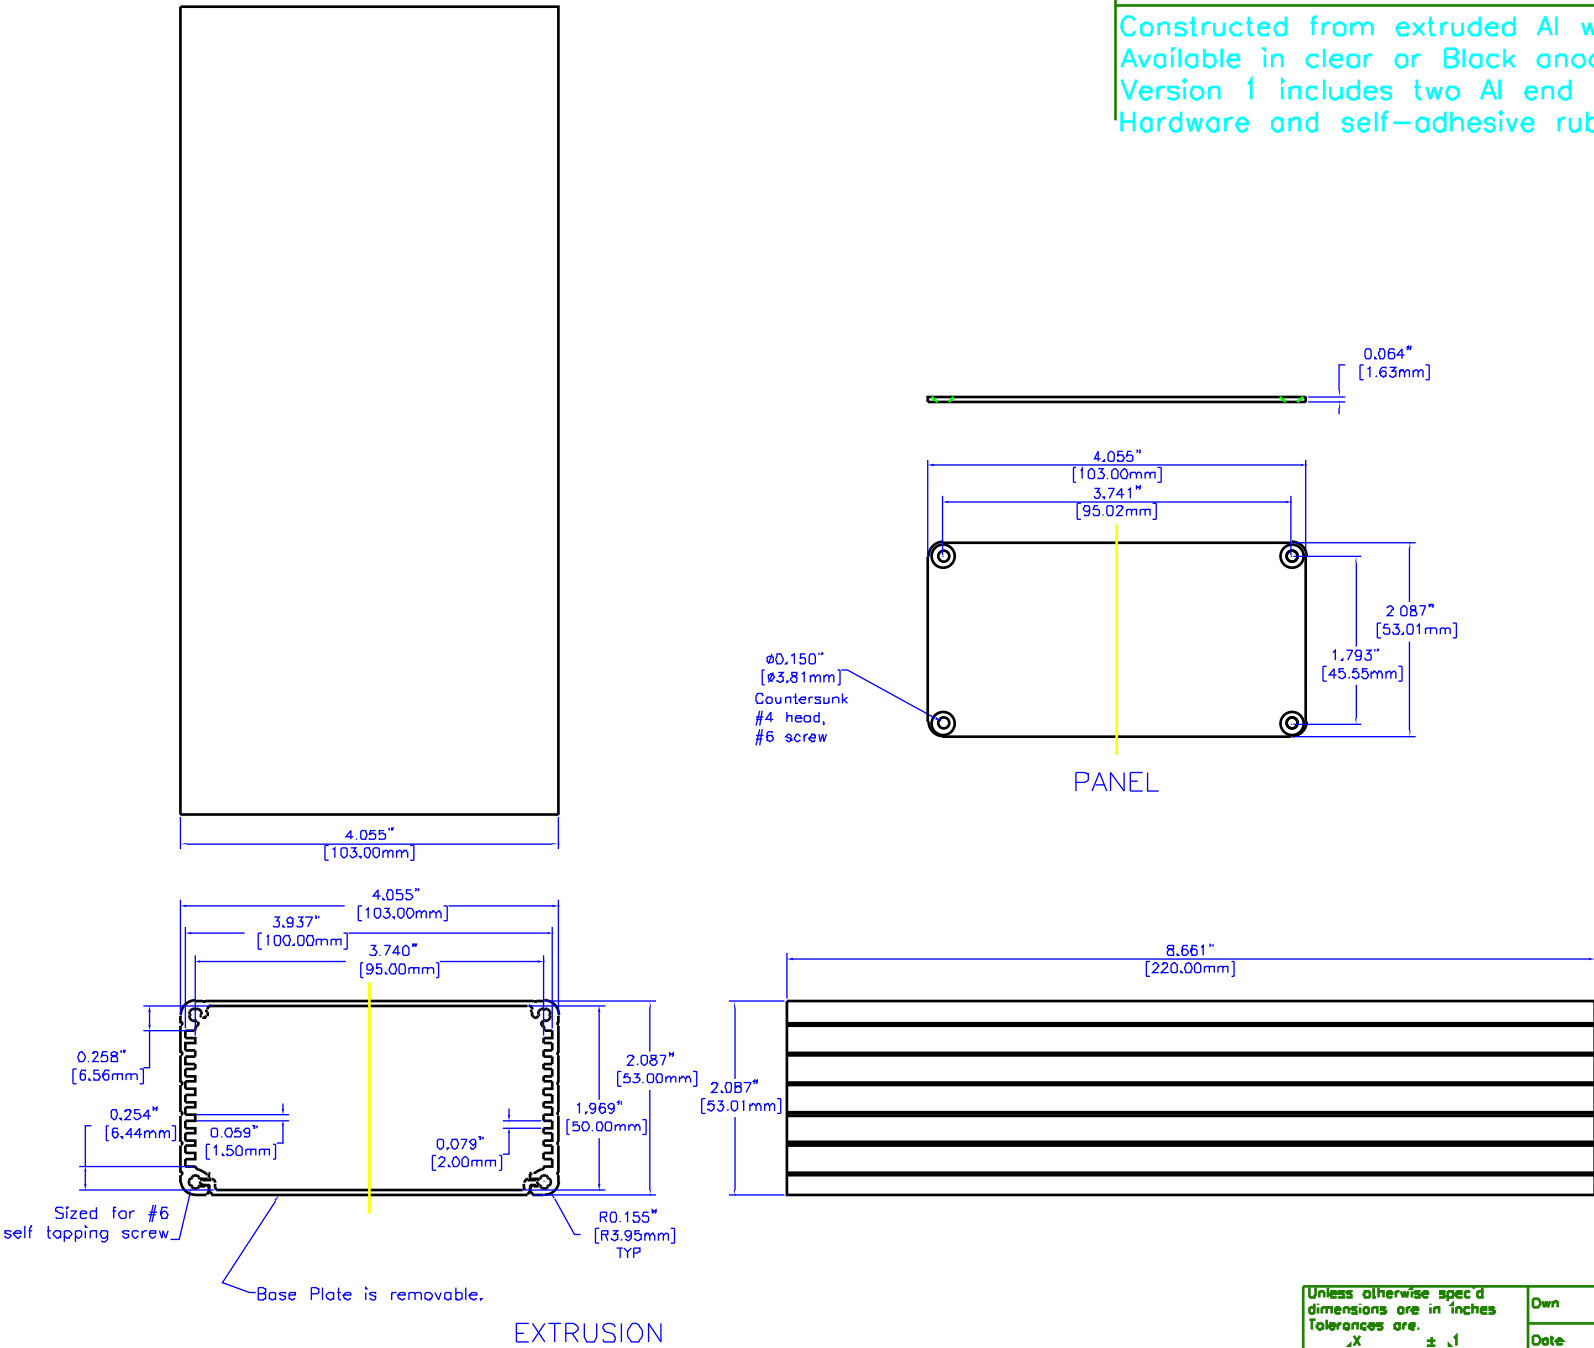


NOTES

Constructed from extruded Al with a minimum thickness of 0.060"(1.50mm)
Available in clear or Black anodized finish
Version 1 includes two Al end panels, and two Black plastic bezels.
Hardware and self-adhesive rubber feet included.

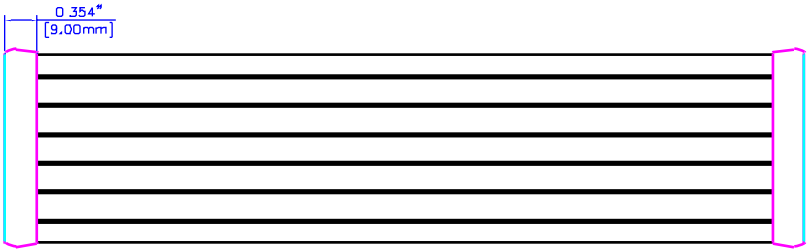

THIS DRAWING IS PROPRIETARY INFORMATION OF HAMMOND MFG.CO.LTD. NOT TO BE USED WITHOUT EXPRESSED WRITTEN PERMISSION OF HAMMOND MFG.CO.LTD.										Unless otherwise spec'd dimensions are in inches Tolerances are:		Own	M. MERCER	HAMMOND MANUFACTURING CO. LTD. Electronics Group, Waterloo, Ont. - Cheektowaga, NY		
										XX ± .1		Date	01 15 02	HAMMOND 1455 SERIES EXTRUDED ALUMINUM		
										XXX ± .02		Chk	---			
										XXXX ± .010		Mat'l	Extruded Aluminum			
										Holes ± .0050		Sheet	1 of 2	Part# 1455N2201		Dwg: 1455N2201A
										Angles ± .5°						
Rev	ECN	Description	----	Date	By											

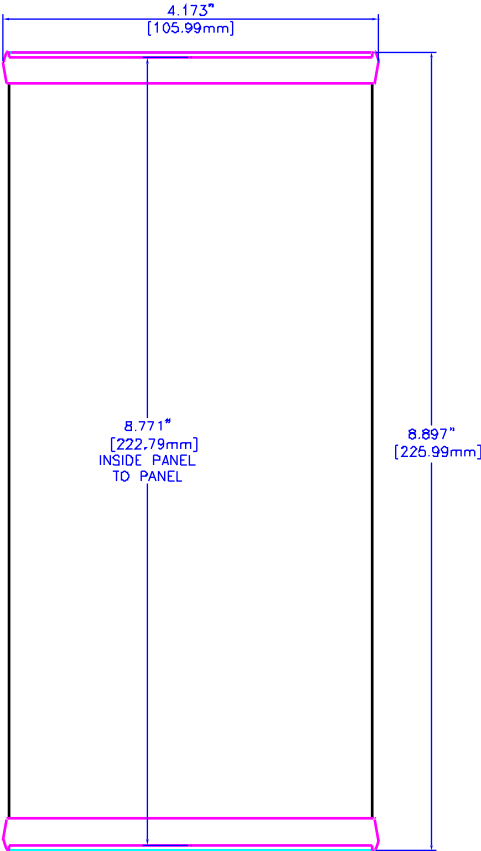

NOTES

Constructed from extruded Al with a minimum thickness of 0.060"(1.50mm)
Available in clear or Black anodized finish
Version 1 includes two Al end panels, and two Black plastic bezels.
Hardware and self-adhesive rubber feet included.

ASSEMBLY

THIS DRAWING IS PROPRIETARY INFORMATION OF HAMMOND MFG.CO.LTD. NOT TO BE USED WITHOUT EXPRESSED WRITTEN PERMISSION OF HAMMOND MFG.CO.LTD.																	XXXX Holes Angles		± .0050 ± .005 ± .5		Cnk		---		HAMMOND MANUFACTURING CO. LTD. Electronics Group, Waterloo, Ont. - Cheektowaga, NY							
							△		N/A		RELEASE		----		01 15 02		MM												Mot'l		Extruded Aluminum	
							Rev		ECN		Description				Date		By		 		Sheet		1 of 1		Part#		1455N2201		Dwg		1455N2201A	