

PRELIMINARY
 Notice: This is not a final specification.
 Some parametric limits are subject to change.

MITSUBISHI HVIGBT MODULES

CM1200HB-66H

2nd-Version HVIGBT (High Voltage Insulated Gate Bipolar Transistor) Modules

HIGH POWER SWITCHING USE
 INSULATED TYPE

CM1200HB-66H




- IC 1200A
- VCES 3300V
- Insulated Type
- 1-element in a pack

APPLICATION

Inverters, Converters, DC choppers, Induction heating, DC to DC converters.

OUTLINE DRAWING & CIRCUIT DIAGRAM

Dimensions in mm

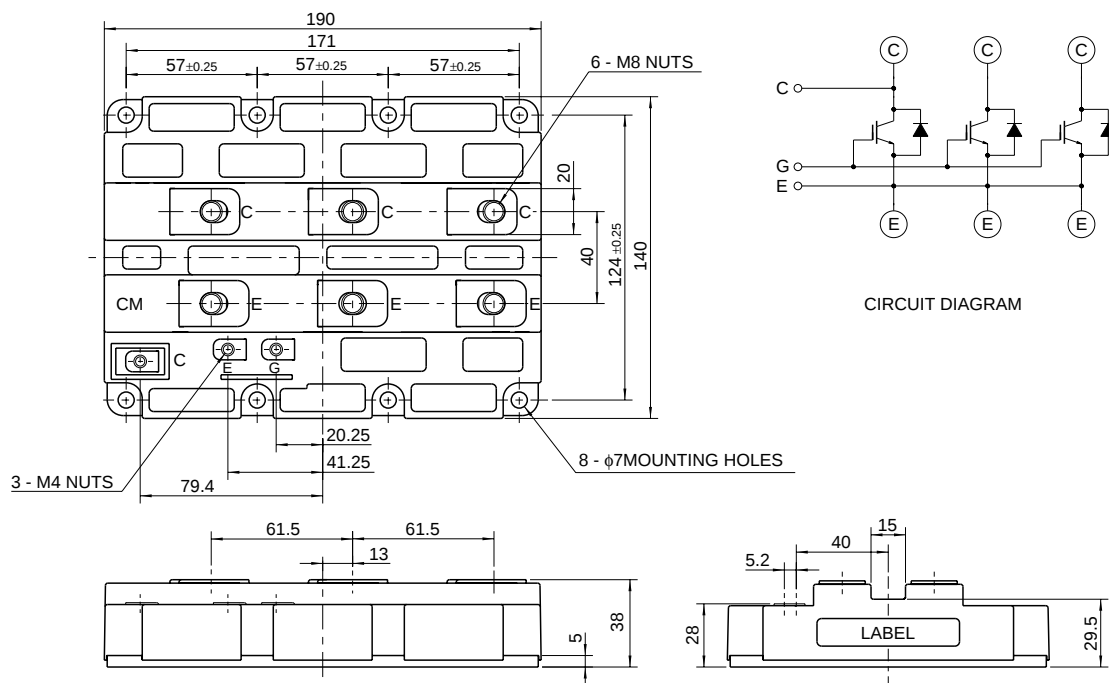

HVIGBT MODULES (High Voltage Insulated Gate Bipolar Transistor Modules)

Mar. 2001

CM1200HB-66H

**HIGH POWER SWITCHING USE
INSULATED TYPE**

2nd-Version HVIGBT (High Voltage Insulated Gate Bipolar Transistor) Modules

MAXIMUM RATINGS (Tj = 25°C)


Symbol	Item	Conditions	Ratings	Unit
VCES	Collector-emitter voltage	VGE = 0V	3300	V
VGES	Gate-emitter voltage	VCE = 0V	±20	V
IC	Collector current	TC = 25°C	1200	A
ICM		Pulse (Note 1)	2400	A
IE (Note 2)	Emitter current	TC = 25°C	1200	A
IE(M)(Note 2)		Pulse (Note 1)	2400	A
PC (Note 3)	Maximum collector dissipation	TC = 25°C, IGBT part	15600	W
Tj	Junction temperature	—	−40 ~ +150	°C
Tstg	Storage temperature	—	−40 ~ +125	°C
Viso	Isolation voltage	Charged part to base plate, rms, sinusoidal, AC 60Hz 1min.	6000	V
—	Mounting torque	Main terminals screw M8	6.67 ~ 13.00	N·m
		Mounting screw M6	2.84 ~ 6.00	N·m
		Auxiliary terminals screw M4	0.88 ~ 2.00	N·m
—	Mass	Typical value	2.2	kg

ELECTRICAL CHARACTERISTICS (Tj = 25°C)

Symbol	Item	Conditions	Limits			Unit
			Min	Typ	Max	
ICES	Collector cutoff current	VCE = VCES, VGE = 0V	—	—	15	mA
VGE(th)	Gate-emitter threshold voltage	IC = 120mA, VCE = 10V	4.5	6.0	7.5	V
IGES	Gate-leakage current	VGE = VGES, VCE = 0V	—	—	0.5	μA
VCE(sat)	Collector-emitter saturation voltage	Tj = 25°C	—	3.80	4.94	V
		Tj = 125°C	—	4.00	—	
Cies	Input capacitance	VCE = 10V VGE = 0V	—	180	—	nF
Coes	Output capacitance		—	18.0	—	nF
Cres	Reverse transfer capacitance		—	5.4	—	nF
QG	Total gate charge	VCC = 1650V, IC = 1200A, VGE = 15V	—	8.6	—	μC
td (on)	Turn-on delay time	VCC = 1650V, IC = 1200A	—	—	1.60	μs
tr	Turn-on rise time	VGE1 = VGE2 = 15V	—	—	2.00	μs
td (off)	Turn-off delay time	RG = 1.6Ω	—	—	2.50	μs
tf	Turn-off fall time	Resistive load switching operation	—	—	1.00	μs
VEC(Note 2)	Emitter-collector voltage	IE = 1200A, VGE = 0V	—	2.80	3.64	V
trr (Note 2)	Reverse recovery time	IE = 1200A,	—	—	1.40	μs
Qrr (Note 2)	Reverse recovery charge	die / dt = −2400A / μs (Note 1)	—	400	—	μC
Rth(j-c)Q	Thermal resistance	Junction to case, IGBT part	—	—	0.008	K/W
Rth(j-c)R		Junction to case, FWDi part	—	—	0.016	K/W
Rth(c-f)	Contact thermal resistance	Case to fin, conductive grease applied	—	0.006	—	K/W

- Note 1. Pulse width and repetition rate should be such that the device junction temp. (Tj) does not exceed Tjmax rating.
 2. IE, VEC, trr, Qrr & die/dt represent characteristics of the anti-parallel, emitter to collector free-wheel diode.
 3. Junction temperature (Tj) should not increase beyond 150°C.
 4. Pulse width and repetition rate should be such as to cause negligible temperature rise.

PERFORMANCE CURVES

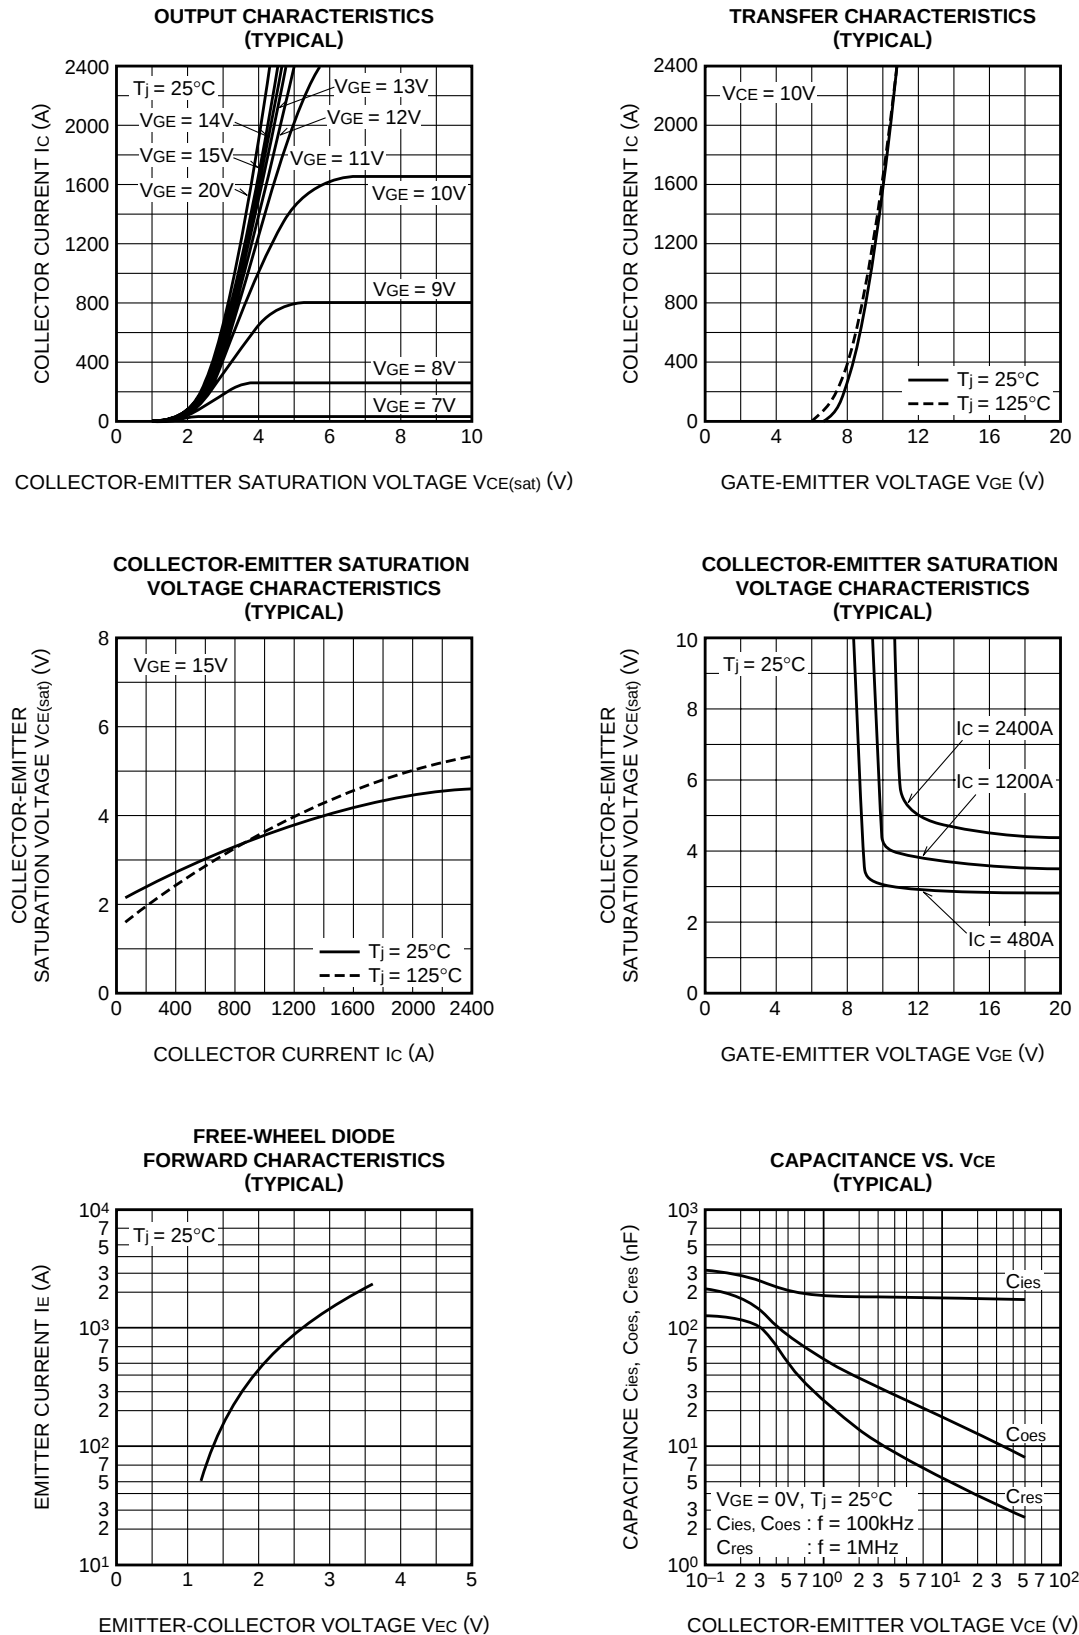


CM1200HB-66H


HIGH POWER SWITCHING USE
 INSULATED TYPE

2nd-Version HVIGBT (High Voltage Insulated Gate Bipolar Transistor) Modules


**HALF-BRIDGE
 SWITCHING CHARACTERISTICS
 (TYPICAL)**

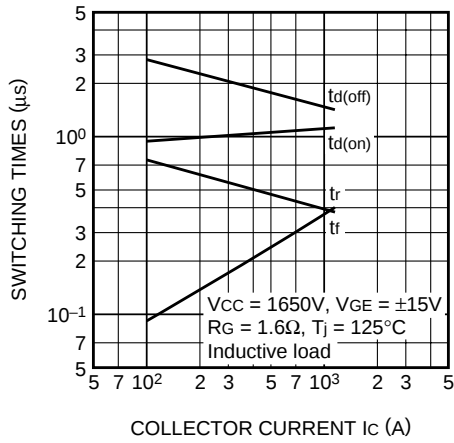


**REVERSE RECOVERY CHARACTERISTICS
 OF FREE-WHEEL DIODE
 (TYPICAL)**

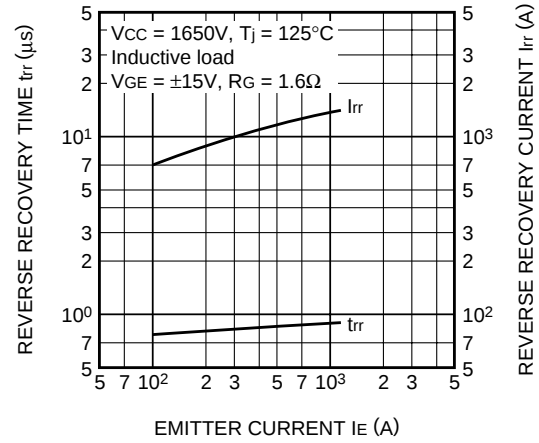

**TRANSIENT THERMAL
 IMPEDANCE CHARACTERISTICS
 (IGBT part)**

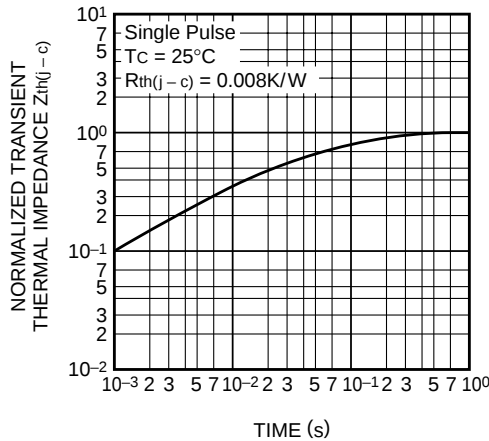

**TRANSIENT THERMAL
 IMPEDANCE CHARACTERISTICS
 (FWDi part)**

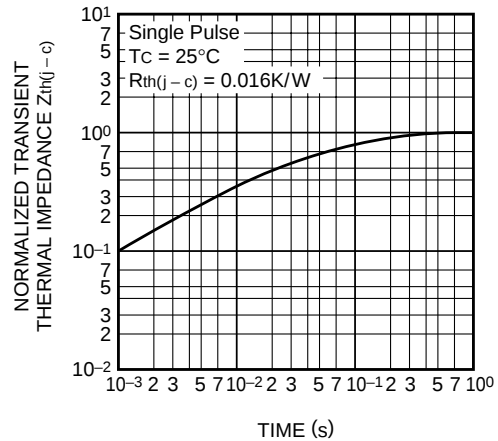

**V_{GE} - GATE CHARGE
 (TYPICAL)**

