

Type 380LQ 85 °C Compact, High Capacitance, Snap-In Aluminum

Higher Capacitance per Case Size



Type 380LQ is on average 27% smaller and more than 10 mm shorter than Type 380LX. This is achieved with a new can-closure method that permits installing capacitor elements into smaller cans. Approaching the capability of the 380LX, the new 380LQ enables you to shrink equipment size and retain the original performance.

Highlights

- New, more capacitance per case
- Compare to Type 380LX
- New, lower voltages down to 16 V

Specifications

Temperature Range	-40 °C to + 85 °C ≤ 315 Vdc -25 °C to + 85 °C ≥ 350 Vdc																			
Rated Voltage Range	16 Vdc to 450 Vdc																			
Capacitance Range	82 μF to 100,000 μF																			
Capacitance Tolerance	±20%																			
Leakage Current	≤ 3 √CV μA, 4 mA max, 5 minutes																			
Ripple Current Multipliers	Ambient Temperature																			
	<table><tr><td>45 °C</td><td>60 °C</td><td>70 °C</td><td>85 °C</td></tr><tr><td>1.50</td><td>1.40</td><td>1.30</td><td>1.00</td></tr></table>							45 °C	60 °C	70 °C	85 °C	1.50	1.40	1.30	1.00					
	45 °C	60 °C	70 °C	85 °C																
	1.50	1.40	1.30	1.00																
Frequency																				
<table><tr><td>Voltage</td><td>50 Hz</td><td>60 Hz</td><td>120 Hz</td><td>500 kHz</td><td>1 kHz</td><td>10 kHz & Up</td></tr><tr><td>16–100 WV</td><td>0.93</td><td>0.95</td><td>1.00</td><td>1.05</td><td>1.08</td><td>1.15</td></tr></table>							Voltage	50 Hz	60 Hz	120 Hz	500 kHz	1 kHz	10 kHz & Up	16–100 WV	0.93	0.95	1.00	1.05	1.08	1.15
Voltage	50 Hz	60 Hz	120 Hz	500 kHz	1 kHz	10 kHz & Up														
16–100 WV	0.93	0.95	1.00	1.05	1.08	1.15														
Low Temperature Characteristics	Impedance ratio: Z _{-20°C} /Z _{+25°C} ≤ 8 (16–50 Vdc) ≤ 4 (63–100 Vdc) ≤ 3 (150–450 Vdc)																			
Endurance Life Test	2000 h at full load at 85 °C Δ Capacitance ±20% ESR 200% of limit DCL 100% of limit																			
Shelf Life Test	1000 h at 85 °C Δ Capacitance ±20% ESR 200% of limit DCL 100% of limit																			
Vibration	10 to 55 Hz, 0.06" and 10 g max, 2 h each plane																			
RoHS Compliant																				


Type 380LQ 85 °C Compact, High Capacitance Snap-in Capacitors

Higher Capacitance per Case Size

Part Numbering System

380LQ	272	M	200	A05	2	A	+D
Type	Cap	Tolerance	Voltage	Case Code	Insulation	Pin Styles	Blank = no end disk if <250 V D = end disk, any voltage
380LQ	561 = 560 μ F	M = $\pm 20\%$	016 = 16 Vdc		2 = PVC	Blank = 2 pins snap-in 6.3 mm L	
	272 = 2700 μ F		200 = 200 Vdc			A = 2 pins snap-in 4.0 mm L	
	392 = 3900 μ F		450 = 450 Vdc				

Outline Drawing

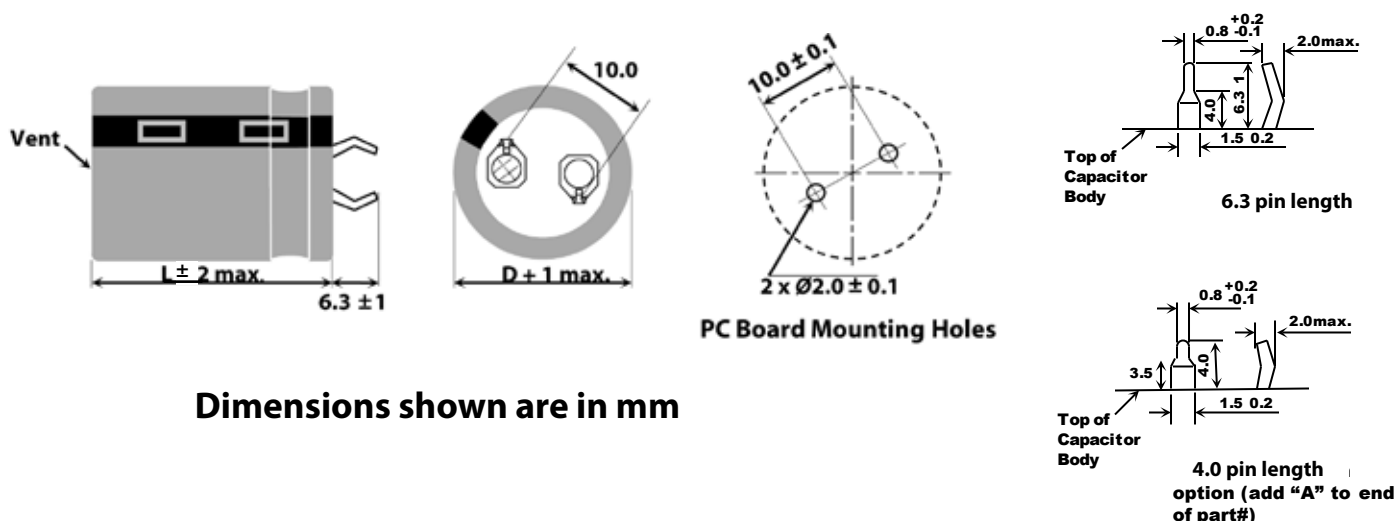

Note that for 200 volts and under the insulating end disc is optional - If one is needed add a (+D) to the end of the part numbering system.

Insulated Case Dimensions

Case Code	DIAMETER D		LENGTH L		Typical Weight (grams)	Case Code	DIAMETER D		LENGTH L		Typical Weight (grams)
	mm	inches	mm	inches			mm	inches	mm	inches	
H01	22	0.87	25	0.98	16	K01	30	1.18	25	0.98	30
H02	22	0.87	30	1.18	19	K02	30	1.18	30	1.18	35
H03	22	0.87	35	1.38	22	K03	30	1.18	35	1.38	40
H04	22	0.87	40	1.57	24	K04	30	1.18	40	1.57	44
H45	22	0.87	45	1.77	28	K45	30	1.18	45	1.77	49
H05	22	0.87	50	1.97	31	K05	30	1.18	50	1.97	53
J01	25	0.98	25	0.98	20	A01	35	1.38	25	0.98	42
J02	25	0.98	30	1.18	24	A02	35	1.38	30	1.18	48
J03	25	0.98	35	1.38	27	A03	35	1.38	35	1.38	54
J04	25	0.98	40	1.57	31	A04	35	1.38	40	1.57	60
J45	25	0.98	45	1.77	35	A45	35	1.38	45	1.77	67
J05	25	0.98	50	1.97	38	A05	35	1.38	50	1.97	74

Type 380LQ 85 °C Compact, High Capacitance Snap-in Capacitors

Higher Capacitance per Case Size

Ratings

		ESR Max		Ripple Amps		Nominal
		@ 25° C		@ 85 °C		Size
Cap.	Catalog	120 Hz	20 kHz	120 Hz	20 kHz	D x L
(µF)	Part Number	(Ω)	(Ω)	(A)	(A)	(mm)
16 Vdc (20 Vdc Surge)						
12000	380LQ123M016H012	0.069	0.059	4.52	5.20	22 x 25
15000	380LQ153M016H022	0.055	0.047	5.26	6.05	22 x 30
18000	380LQ183M016H032	0.046	0.039	5.57	6.41	22 x 35
18000	380LQ183M016J012	0.046	0.039	5.57	6.41	25 x 25
22000	380LQ223M016H042	0.038	0.032	6.10	7.02	22 x 40
22000	380LQ223M016J022	0.038	0.032	6.10	7.02	25 x 30
27000	380LQ273M016H452	0.031	0.026	6.31	7.26	22 x 45
27000	380LQ273M016J032	0.031	0.026	6.31	7.26	25 x 25
27000	380LQ273M016K012	0.031	0.026	6.31	7.26	30 x 25
33000	380LQ333M016H052	0.025	0.021	6.84	7.87	22 x 50
33000	380LQ333M016J042	0.025	0.021	6.84	7.87	25 x 40
33000	380LQ333M016K022	0.025	0.021	6.84	7.87	30 x 30
33000	380LQ333M016A012	0.025	0.021	6.84	7.87	35 x 25
39000	380LQ393M016J452	0.024	0.020	6.94	7.98	25 x 45
39000	380LQ393M016K032	0.024	0.020	6.94	7.98	30 x 35
47000	380LQ473M016J052	0.023	0.019	7.47	8.59	25 x 50
47000	380LQ473M016K042	0.023	0.019	7.47	8.59	30 x 40
47000	380LQ473M016A022	0.023	0.019	7.47	8.59	35 x 30
56000	380LQ563M016K452	0.022	0.019	8.73	10.04	30 x 45
56000	380LQ563M016A032	0.022	0.018	8.73	10.04	35 x 35
68000	380LQ683M016K052	0.021	0.018	9.05	10.41	30 x 50
68000	380LQ683M016A042	0.021	0.018	9.05	10.41	35 x 40
82000	380LQ823M016A452	0.020	0.018	9.49	10.91	35 x 45
100000	380LQ104M016A052	0.019	0.018	10.18	11.71	35 x 50
25 Vdc (32 Vdc Surge)						
8200	380LQ822M025H012	0.081	0.065	3.57	4.11	22 x 25
12000	380LQ123M025H022	0.055	0.044	4.10	4.72	22 x 30
12000	380LQ123M025J012	0.055	0.044	4.10	4.72	25 x 25
15000	380LQ153M025H032	0.044	0.035	4.63	5.32	22 x 35
15000	380LQ153M025J022	0.044	0.035	4.63	5.32	25 x 30
18000	380LQ183M025H042	0.037	0.029	5.47	6.29	22 x 40
18000	380LQ183M025J032	0.037	0.029	5.47	6.29	25 x 35
18000	380LQ183M025K012	0.037	0.029	5.47	6.29	30 x 25
22000	380LQ223M025H452	0.030	0.024	6.10	7.02	22 x 45
22000	380LQ223M025J042	0.030	0.024	6.10	7.02	25 x 40
22000	380LQ223M025K022	0.030	0.024	6.10	7.02	30 x 30
22000	380LQ223M025A012	0.030	0.024	6.10	7.02	35 x 25
27000	380LQ273M025J452	0.025	0.020	6.21	7.14	25 x 45
27000	380LQ273M025K032	0.025	0.020	6.21	7.14	30 x 35
33000	380LQ333M025J052	0.020	0.016	6.84	7.87	25 x 50
33000	380LQ333M025K042	0.020	0.016	6.84	7.87	30 x 40
33000	380LQ333M025A022	0.020	0.016	6.84	7.87	35 x 30

		ESR Max		Ripple Amps		Nominal
		@ 25° C		@ 85 °C		Size
Cap.	Catalog	120 Hz	20 kHz	120 Hz	20 kHz	D x L
(µF)	Part Number	(Ω)	(Ω)	(A)	(A)	(mm)
25 Vdc (44 Vdc Surge)						
39000	380LQ393M025K452	0.020	0.016	7.36	8.46	30 x 45
39000	380LQ393M025A032	0.020	0.016	7.36	8.46	35 x 35
47000	380LQ473M025K052	0.019	0.016	8.00	9.20	30 x 50
47000	380LQ473M025A042	0.019	0.015	8.00	9.20	35 x 40
56000	380LQ563M025A452	0.019	0.016	8.91	10.25	35 x 45
68000	380LQ683M025A052	0.018	0.016	9.79	11.26	35 x 50
35 Vdc (32 Vdc Surge)						
5600	380LQ562M035H012	0.104	0.078	3.36	3.86	22 x 25
8200	380LQ822M035H022	0.071	0.053	4.00	4.60	22 x 30
8200	380LQ822M035J012	0.071	0.053	4.00	4.60	25 x 25
10000	380LQ103M035H032	0.058	0.044	4.42	5.08	22 x 35
10000	380LQ103M035J022	0.058	0.044	4.42	5.08	25 x 30
12000	380LQ123M035H042	0.048	0.036	5.05	5.81	22 x 40
12000	380LQ123M035J032	0.048	0.036	5.05	5.81	25 x 35
12000	380LQ123M035K012	0.048	0.036	5.05	5.81	30 x 25
15000	380LQ153M035H452	0.039	0.029	5.57	6.41	22 x 45
15000	380LQ153M035J042	0.039	0.029	5.57	6.41	25 x 40
18000	380LQ183M035J452	0.032	0.024	5.68	6.53	25 x 45
18000	380LQ183M035K022	0.032	0.024	5.68	6.53	30 x 30
18000	380LQ183M035A012	0.032	0.024	5.68	6.53	35 x 25
22000	380LQ223M035J052	0.026	0.020	6.10	7.02	25 x 50
22000	380LQ223M035K032	0.026	0.020	6.10	7.02	30 x 35
22000	380LQ223M035A022	0.026	0.020	6.10	7.02	35 x 30
27000	380LQ273M035K452	0.021	0.016	6.84	7.87	30 x 45
27000	380LQ273M035A032	0.021	0.016	6.84	7.87	35 x 35
33000	380LQ333M035K052	0.018	0.013	7.15	8.22	30 x 50
33000	380LQ333M035A042	0.018	0.014	7.15	8.22	35 x 40
39000	380LQ393M035A452	0.017	0.014	7.91	9.10	35 x 45
47000	380LQ473M035A052	0.017	0.014	8.56	9.84	35 x 50
50 Vdc (63 Vdc Surge)						
3300	380LQ332M050H012	0.151	0.113	2.73	3.14	22 x 25
4700	380LQ472M050H022	0.106	0.079	3.03	3.48	22 x 30
4700	380LQ472M050J012	0.106	0.079	3.03	3.48	25 x 25
5600	380LQ562M050H032	0.089	0.067	3.42	3.93	22 x 35
6800	380LQ682M050H042	0.073	0.055	3.85	4.43	22 x 40
6800	380LQ682M050J022	0.073	0.055	3.85	4.43	25 x 30
6800	380LQ682M050K012	0.073	0.055	3.85	4.43	30 x 25
8200	380LQ822M050H452	0.061	0.045	4.41	5.07	22 x 45
8200	380LQ822M050J032	0.061	0.045	4.41	5.07	25 x 35
10000	380LQ103M050H052	0.050	0.037	4.97	5.72	22 x 50
10000	380LQ103M050J042	0.050	0.037	4.97	5.72	25 x 40
10000	380LQ103M050K022	0.050	0.037	4.97	5.72	30 x 30

Type 380LQ 85 °C Compact, High Capacitance Snap-in Capacitors

Higher Capacitance per Case Size

		ESR Max		Ripple Amps		Nominal			ESR Max		Ripple Amps		Nominal						
		@ 25° C		@ 85 °C		Size			@ 25° C		@ 85 °C		Size						
Cap.	Catalog	120 Hz	20 kHz	120 Hz	20 kHz	D x L	Cap.	Catalog	120 Hz	20 kHz	120 Hz	20 kHz	D x L						
(µF)	Part Number	(Ω)	(Ω)	(A)	(A)	(mm)	(µF)	Part Number	(Ω)	(Ω)	(A)	(A)	(mm)						
50 Vdc (63 Vdc Surge)							80 Vdc (100 Vdc Surge)												
10000	380LQ103M050A012	0.05	0.037	4.97	5.72	35 x 25	3900	380LQ392M080H052	0.085	0.064	3.59	4.13	22 x 50						
12000	380LQ123M050J452	0.041	0.031	5.58	6.42	25 x 45	3900	380LQ392M080J042	0.085	0.064	3.59	4.13	25 x 40						
12000	380LQ123M050K032	0.041	0.031	5.58	6.42	30 x 35	3900	380LQ392M080A012	0.085	0.064	3.59	4.13	35 x 25						
12000	380LQ123M050A022	0.041	0.031	5.58	6.42	35 x 30	4700	380LQ472M080H452	0.071	0.053	4.09	4.70	25 x 45						
15000	380LQ153M050K042	0.033	0.025	6.44	7.41	30 x 40	4700	380LQ472M080K022	0.071	0.053	4.09	4.70	30 x 30						
15000	380LQ153M050A032	0.033	0.025	6.44	7.41	35 x 35	5600	380LQ562M080J052	0.059	0.044	4.55	5.23	25 x 50						
18000	380LQ183M050K452	0.028	0.021	6.94	7.98	30 x 45	5600	380LQ562M080K032	0.059	0.044	4.55	5.23	30 x 35						
18000	380LQ183M050A042	0.028	0.021	6.94	7.98	35 x 40	5600	380LQ562M080A022	0.059	0.044	4.55	5.23	35 x 30						
22000	380LQ223M050A452	0.023	0.018	7.57	8.71	35 x 45	6800	380LQ682M080K452	0.049	0.037	5.16	5.93	30 x 45						
27000	380LQ273M050A052	0.018	0.015	8.96	10.30	35 x 50	6800	380LQ682M080A032	0.049	0.037	5.16	5.93	35 x 35						
63 Vdc (79 Vdc Surge)							8200							380LQ822M080K052	0.04	0.03	5.83	6.70	30 x 50
2200	380LQ222M063H012	0.188	0.141	2.52	2.90	22 x 25	8200	380LQ822M080A042	0.04	0.03	5.83	6.70	35 x 40						
3300	380LQ332M063H022	0.126	0.094	4.10	4.72	22 x 30	10000	380LQ103M080A452	0.033	0.025	6.51	7.49	35 x 45						
3300	380LQ332M063J012	0.126	0.094	4.10	4.72	25 x 25	12000	380LQ122M080A052	0.028	0.021	7.28	8.37	35 x 50						
3900	380LQ392M063H032	0.106	0.080	4.44	5.11	22 x 35	100 Vdc (125 Vdc Surge)												
3900	380LQ392M063J022	0.106	0.080	4.44	5.11	25 x 30	1000	380LQ102M100H012	0.332	0.216	1.96	2.25	22 x 25						
4700	380LQ472M063H042	0.088	0.066	4.86	5.59	22 x 40	1200	380LQ122M100J012	0.276	0.18	2.31	2.66	25 x 25						
5600	380LQ562M063H452	0.074	0.056	5.36	6.16	22 x 45	1500	380LQ152M100H022	0.221	0.144	2.57	2.96	22 x 30						
5600	380LQ562M063J042	0.074	0.056	5.36	6.16	25 x 40	1800	380LQ182M100H032	0.184	0.120	2.84	3.27	22 x 35						
6800	380LQ682M063J452	0.061	0.046	5.84	6.72	25 x 45	1800	380LQ182M100J022	0.184	0.120	2.84	3.27	25 x 30						
6800	380LQ682M063K022	0.061	0.046	5.84	6.72	30 x 30	2200	380LQ222M100H452	0.151	0.098	3.14	3.61	22 x 45						
6800	380LQ682M063A012	0.061	0.046	5.84	6.72	35 x 25	2200	380LQ222M100J032	0.151	0.098	3.14	3.61	25 x 35						
8200	380LQ822M063J052	0.051	0.038	6.00	6.90	25 x 50	2200	380LQ222M100K012	0.151	0.098	3.14	3.61	30 x 25						
8200	380LQ822M063K032	0.051	0.038	6.00	6.90	30 x 35	2700	380LQ272M100H052	0.123	0.08	3.71	4.27	22 x 50						
8200	380LQ822M063A022	0.051	0.038	6.00	6.90	35 x 30	2700	380LQ272M100J042	0.123	0.08	3.71	4.27	25 x 40						
10000	380LQ103M063K042	0.041	0.031	6.52	7.50	30 x 40	2700	380LQ272M100K022	0.123	0.08	3.71	4.27	30 x 30						
10000	380LQ103M063A032	0.041	0.031	6.52	7.50	35 x 35	2700	380LQ272M100A012	0.123	0.08	3.71	4.27	35 x 25						
12000	380LQ123M063K452	0.035	0.026	7.15	8.22	30 x 45	3300	380LQ332M100J452	0.100	0.065	4.06	4.67	25 x 45						
12000	380LQ123M063A042	0.035	0.026	7.15	8.22	35 x 40	3300	380LQ332M100K032	0.100	0.065	4.06	4.67	30 x 35						
15000	380LQ153M063A452	0.028	0.021	7.91	9.10	35 x 45	3900	380LQ392M100J052	0.085	0.055	4.54	5.22	25 x 50						
18000	380LQ183M063A052	0.023	0.018	8.55	9.83	35 x 50	3900	380LQ392M100K042	0.085	0.055	4.54	5.22	30 x 40						
18000	380LQ183M063A052	0.023	0.018	8.55	9.83	35 x 50	3900	380LQ392M100A022	0.085	0.055	4.54	5.22	35 x 30						
80 Vdc (100 Vdc Surge)							4700	380LQ472M100K452	0.071	0.046	5.13	5.90	30 x 45						
1500	380LQ152M080H012	0.221	0.166	2.26	2.60	22 x 25	4700	380LQ472M100A032	0.071	0.046	5.13	5.90	35 x 35						
1800	380LQ182M080H022	0.184	0.138	2.52	2.90	22 x 30	5600	380LQ562M100K052	0.059	0.041	5.75	6.61	30 x 50						
2200	380LQ222M080H032	0.151	0.113	2.73	3.14	22 x 35	5600	380LQ562M100A042	0.059	0.038	5.75	6.61	35 x 40						
2200	380LQ222M080J012	0.151	0.113	2.73	3.14	25 x 25	6800	380LQ682M100A452	0.049	0.034	6.60	7.59	35 x 45						
2700	380LQ272M080H042	0.123	0.092	2.78	3.20	22 x 40	8200	380LQ822M100A052	0.040	0.030	7.29	8.38	35 x 50						
2700	380LQ272M080J022	0.123	0.092	2.78	3.20	25 x 30	160 Vdc (200 Vdc Surge)												
3300	380LQ332M080H452	0.100	0.075	3.21	3.69	22 x 45	560	380LQ561M160H012	0.355	0.16	2.25	3.15	22 x 25						
3300	380LQ332M080J032	0.100	0.075	3.21	3.69	25 x 35	680	380LQ681M160H022	0.293	0.132	2.50	3.50	22 x 30						
3300	380LQ332M080K012	0.1	0.075	3.21	3.69	30 x 25	820	380LQ821M160H032	0.243	0.109	2.75	3.85	22 x 35						

Type 380LQ 85 °C Compact, High Capacitance Snap-in Capacitors

Higher Capacitance per Case Size

Cap. (µF)	Catalog Part Number	ESR Max		Ripple Amps		Nominal
		@ 25° C		@ 85 °C		Size
		120 Hz	20 kHz	120 Hz	20 kHz	D x L
		(Ω)	(Ω)	(A)	(A)	(mm)
160 Vdc (200 Vdc Surge)						
1000	380LQ102M160H042	0.199	0.09	3.00	4.20	22 x 40
1000	380LQ102M160J022	0.199	0.09	3.00	4.20	25 x 30
1200	380LQ122M160H452	0.166	0.075	3.25	4.55	22 x 45
1200	380LQ122M160J032	0.166	0.075	3.25	4.55	25 x 35
1200	380LQ122M160K012	0.166	0.075	3.25	4.55	30 x 25
1500	380LQ152M160H052	0.133	0.060	3.73	5.22	22 x 50
1500	380LQ152M160J042	0.133	0.060	3.73	5.22	25 x 40
1500	380LQ152M160K022	0.133	0.060	3.73	5.22	30 x 30
1500	380LQ152M160A012	0.133	0.06	3.73	5.22	35 x 25
1800	380LQ182M160J452	0.111	0.05	4.20	5.88	25 x 45
1800	380LQ182M160K032	0.12	0.054	4.20	5.88	30 x 35
1800	380LQ182M160A022	0.111	0.05	4.20	5.88	35 x 30
2200	380LQ222M160K042	0.090	0.041	4.78	6.69	30 x 40
2200	380LQ222M160A032	0.098	0.049	4.78	6.69	35 x 35
2700	380LQ272M160K452	0.074	0.033	5.45	7.63	30 x 45
2700	380LQ272M160A042	0.080	0.040	5.45	7.63	35 x 40
3300	380LQ332M160A452	0.070	0.035	5.75	8.05	35 x 45
3900	380LQ392M160A052	0.055	0.028	6.00	8.40	35 x 50
180 Vdc (225 Vdc Surge)						
470	380LQ471M180H012	0.423	0.19	2.08	2.91	22 x 25
560	380LQ561M180H022	0.355	0.16	2.25	3.15	22 x 30
680	380LQ681M180H022	0.293	0.132	2.50	3.50	22 x 30
680	380LQ681M180J012	0.293	0.132	2.50	3.50	25 x 25
820	380LQ821M180H032	0.243	0.109	2.75	3.85	22 x 35
820	380LQ821M180J022	0.243	0.109	2.75	3.85	25 x 30
1000	380LQ102M180H452	0.199	0.090	3.00	4.20	22 x 45
1000	380LQ102M180J032	0.199	0.090	3.00	4.20	25 x 35
1000	380LQ102M180K012	0.199	0.09	3.00	4.20	30 x 25
1200	380LQ122M180H052	0.166	0.075	3.31	4.63	22 x 50
1200	380LQ122M180J042	0.166	0.075	3.31	4.63	25 x 40
1200	380LQ122M180K022	0.166	0.075	3.31	4.63	30 x 30
1200	380LQ122M180A012	0.166	0.075	3.31	4.63	35 x 25
1500	380LQ152M180J452	0.133	0.060	3.83	5.36	25 x 45
1500	380LQ152M180K032	0.133	0.060	3.83	5.36	30 x 35
1500	380LQ152M180A022	0.133	0.060	3.83	5.36	35 x 30
1800	380LQ182M180J052	0.120	0.054	4.32	6.05	25 x 50
1800	380LQ182M180K042	0.12	0.054	4.32	6.05	30 x 40
1800	380LQ182M180A022	0.12	0.054	4.32	6.05	35 x 30
2200	380LQ222M180K452	0.098	0.049	4.92	6.89	30 x 45
2200	380LQ222M180A042	0.098	0.049	4.92	6.89	35 x 40
2700	380LQ272M180K052	0.086	0.043	5.52	7.73	30 x 50
2700	380LQ272M180A452	0.086	0.043	5.52	7.73	35 x 45
3300	380LQ332M180A052	0.080	0.040	5.75	8.05	35 x 50

Cap. (μF)	Catalog Part Number	ESR Max @ 25° C		Ripple Amps @ 85 °C		Nominal Size
		120 Hz	20 kHz	120 Hz	20 kHz	D x L
		(Ω)	(Ω)	(A)	(A)	(mm)
200 Vdc (250 Vdc Surge)						
390	380LQ391M200H012	0.51	0.23	1.68	2.35	22 x 25
470	380LQ471M200H022	0.423	0.19	1.85	2.59	22 x 30
560	380LQ561M200H022	0.355	0.16	2.43	3.40	22 x 30
560	380LQ561M200J012	0.355	0.160	2.43	3.40	25 x 25
680	380LQ681M200H032	0.293	0.132	2.68	3.75	22 x 35
680	380LQ681M200J022	0.293	0.132	2.68	3.75	25 x 30
820	380LQ821M200H042	0.243	0.109	2.93	4.10	22 x 40
820	380LQ821M200J022	0.243	0.109	2.93	4.10	25 x 30
820	380LQ821M200K012	0.243	0.109	2.93	4.10	30 x 25
1000	380LQ102M200H452	0.199	0.09	3.25	4.55	22 x 45
1000	380LQ102M200J032	0.199	0.09	3.25	4.55	25 x 35
1000	380LQ102M200K022	0.199	0.09	3.25	4.55	30 x 30
1000	380LQ102M200A012	0.232	0.116	3.25	4.55	35 x 25
1200	380LQ122M200H052	0.166	0.075	3.50	4.90	22 x 50
1200	380LQ122M200J042	0.166	0.075	3.50	4.90	25 x 40
1200	380LQ122M200K022	0.166	0.075	3.50	4.90	30 x 30
1500	380LQ152M200J052	0.133	0.060	3.87	5.42	25 x 50
1500	380LQ152M200K032	0.144	0.065	3.87	5.42	30 x 35
1500	380LQ152M200A022	0.144	0.065	3.87	5.42	35 x 30
1800	380LQ182M200K452	0.16	0.08	4.32	6.05	30 x 45
1800	380LQ182M200A032	0.12	0.06	4.32	6.05	35 x 35
2200	380LQ222M200K052	0.098	0.049	4.92	6.89	30 x 50
2200	380LQ222M200A042	0.105	0.053	4.92	6.89	35 x 40
2700	380LQ272M200A052	0.086	0.043	5.45	7.63	35 x 50
250 Vdc (300 Vdc Surge)						
270	380LQ271M250H012	0.737	0.332	1.31	1.83	22 x 25
330	380LQ331M250H022	0.603	0.271	1.75	2.45	22 x 30
390	380LQ391M250H022	0.51	0.23	1.91	2.67	22 x 30
390	380LQ391M250J012	0.510	0.230	1.91	2.67	25 x 25
470	380LQ471M250H032	0.423	0.190	2.11	2.95	22 x 35
470	380LQ471M250J022	0.423	0.190	2.11	2.95	25 x 30
560	380LQ561M250H042	0.355	0.160	2.25	3.15	22 x 40
560	380LQ561M250J022	0.355	0.160	2.25	3.15	25 x 30
560	380LQ561M250K012	0.355	0.16	2.25	3.15	30 x 25
680	380LQ681M250H452	0.293	0.132	2.50	3.50	22 x 45
680	380LQ681M250J032	0.293	0.132	2.50	3.50	25 x 35
680	380LQ681M250K012	0.293	0.132	2.30	3.20	30 x 25
680	380LQ681M250K022	0.293	0.132	2.50	3.50	30 x 30
820	380LQ821M250H052	0.243	0.109	2.77	3.88	22 x 50
820	380LQ821M250J042	0.243	0.109	2.77	3.88	25 x 40
820	380LQ821M250K022	0.243	0.109	2.77	3.88	30 x 30
820	380LQ821M250A012	0.243	0.121	2.77	3.88	35 x 25
1000	380LQ102M250J452	0.199	0.09	3.32	4.65	25 x 45

Type 380LQ 85 °C Compact, High Capacitance Snap-in Capacitors

Higher Capacitance per Case Size

Cap. (µF)	Catalog Part Number	ESR Max		Ripple Amps		Nominal
		@ 25° C		@ 85 °C		Size
		120 Hz (Ω)	20 kHz (Ω)	120 Hz (A)	20 kHz (A)	D x L (mm)
250 Vdc (300 Vdc Surge)						
1000	380LQ102M250K032	0.199	0.09	3.32	4.65	30 x 35
1000	380LQ102M250A022	0.199	0.09	3.32	4.65	35 x 30
1200	380LQ122M250K042	0.166	0.075	3.53	4.94	30 x 40
1200	380LQ122M250A032	0.166	0.083	3.53	4.94	35 x 35
1500	380LQ152M250K052	0.133	0.066	4.04	5.66	30 x 50
1500	380LQ152M250A042	0.133	0.066	4.04	5.66	35 x 40
1800	380LQ182M250A452	0.111	0.055	4.55	6.37	35 x 45
2200	380LQ222M250A052	0.105	0.052	5.00	7.00	35 x 50
315 Vdc (365 Vdc Surge)						
180	380LQ181M315H012	1.105	0.553	1.21	1.69	22 x 25
220	380LQ221M315H022	0.904	0.452	1.41	1.97	22 x 30
270	380LQ271M315H022	0.737	0.368	1.60	2.24	22 x 30
330	380LQ331M315H042	0.603	0.301	1.82	2.55	22 x 40
330	380LQ331M315J022	0.603	0.301	1.82	2.55	25 x 30
330	380LQ331M315K012	0.603	0.301	1.82	2.55	30 x 25
390	380LQ391M315H452	0.510	0.255	2.01	2.81	22 x 45
390	380LQ391M315J032	0.510	0.255	2.01	2.81	25 x 35
390	390LQ391M315K022	0.51	0.255	2.01	2.81	30 x 30
470	380LQ471M315H052	0.423	0.212	2.27	3.18	22 x 50
470	380LQ471M315J042	0.423	0.212	2.27	3.18	25 x 40
470	380LQ471M315K022	0.423	0.212	2.27	3.18	30 x 30
470	380LQ471M315A012	0.423	0.233	2.27	3.18	35 x 25
560	380LQ561M315J452	0.355	0.178	2.56	3.58	25 x 45
560	380LQ561M315K032	0.355	0.178	2.56	3.58	30 x 35
560	380LQ561M315A022	0.355	0.195	2.56	3.58	35 x 30
680	380LQ681M350K042	0.293	0.148	2.87	4.02	30 x 40
680	380LQ681M315A032	0.293	0.146	2.87	4.55	35 x 35
820	380LQ821M315K452	0.243	0.121	3.25	4.55	30 x 45
820	380LQ821M315A042	0.243	0.121	3.25	4.55	35 x 40
1000	380LQ102M315K052	0.199	0.09	3.63	5.08	30 x 50
1000	380LQ102M315A452	0.199	0.109	3.63	5.08	35 x 45
350 Vdc (400 Vdc Surge)						
150	380LQ151M350H012	1.328	0.663	1.12	1.57	22 x 25
180	380LQ181M350H022	1.105	0.553	1.22	1.71	22 x 30
220	380LQ221M350H032	0.904	0.452	1.44	2.02	22 x 35
270	380LQ271M350H042	0.737	0.368	1.66	2.32	22 x 40
270	380LQ271M350J022	0.737	0.368	1.66	2.32	25 x 30
330	380LQ331M350H452	0.603	0.301	1.88	2.63	22 x 45
330	380LQ331M350J032	0.603	0.301	1.88	2.63	25 x 35
390	380LQ391M350H052	0.510	0.255	2.06	2.88	22 x 50
390	380LQ391M350J042	0.51	0.255	2.06	2.88	25 x 40
390	380LQ391M350K022	0.51	0.255	2.06	2.88	30 x 30

Cap. (µF)	Catalog Part Number	ESR Max		Ripple Amps		Nominal
		@ 25° C		@ 85 °C		Size
		120 Hz (Ω)	20 kHz (Ω)	120 Hz (A)	20 kHz (A)	D x L (mm)
350 Vdc (400 Vdc Surge)						
390	380LQ391M350A012	0.51	0.255	2.06	2.88	35 x 25
470	380LQ471M350J452	0.423	0.211	2.40	3.36	25 x 45
470	380LQ471M350K032	0.423	0.211	2.40	3.36	30 x 35
470	380LQ471M350A022	0.423	0.211	2.40	3.36	35 x 30
560	380LQ561M350J050	0.355	0.178	2.60	3.64	25 x 50
560	380LQ561M350K042	0.355	0.178	2.60	3.64	30 x 40
560	380LQ561M350A022	0.355	0.178	2.60	3.64	35 x 30
680	380LQ681M350K452	0.293	0.146	2.96	4.14	30 x 45
680	380LQ681M350A032	0.293	0.146	2.96	4.14	35 x 35
820	380LQ821M350K052	0.243	0.121	3.25	4.55	30 x 50
820	380LQ821M350A452	0.243	0.121	3.25	4.55	35 x 45
1000	380LQ102M350A052	0.199	0.109	3.54	4.96	35 x 50
400 Vdc (450 Vdc Surge)						
120	380LQ121M400H012	1.658	0.83	1.02	1.43	22 x 25
150	380LQ151M400H022	1.326	0.66	1.16	1.62	22 x 30
180	380LQ181M400H022	1.105	0.552	1.30	1.80	22 x 30
180	380LQ181M400H032	1.105	0.552	1.44	2.02	22 x 35
220	380LQ221M400H032	0.904	0.452	1.40	1.90	22 x 35
220	380LQ221M400H042	0.904	0.452	1.49	2.09	22 x 40
220	380LQ221M400J022	0.904	0.452	1.49	2.09	25 x 30
270	380LQ271M400H452	0.737	0.368	1.67	2.34	22 x 45
270	380LQ271M400J032	0.737	0.368	1.67	2.34	25 x 35
270	380LQ271M400K022	0.737	0.368	1.67	2.34	30 x 30
330	380LQ331M400H052	0.603	0.301	1.90	2.66	22 x 50
330	380LQ331M400J042	0.603	0.301	1.90	2.66	25 x 40
330	380LQ331M400K022	0.603	0.301	1.90	2.66	30 x 30
330	380LQ331M400A012	0.603	0.301	1.90	2.66	35 x 25
390	380LQ391M400J452	0.510	0.255	2.13	2.98	25 x 45
390	380LQ391M400K032	0.510	0.255	2.13	2.98	30 x 35
390	380LQ391M400A022	0.510	0.255	2.13	2.98	35 x 30
470	380LQ471M400J052	0.423	0.212	2.39	3.35	25 x 50
470	380LQ471M400K042	0.423	0.212	2.39	3.35	30 x 40
470	380LQ471M400A022	0.423	0.212	2.39	3.35	35 x 30
560	380LQ561M400K452	0.355	0.178	2.69	3.77	30 x 45
560	380LQ561M400A032	0.355	0.178	2.69	3.77	35 x 35
680	380LQ681M400K052	0.293	0.148	2.96	4.14	30 x 50
680	380LQ681M400A042	0.293	0.148	2.70	3.80	35 x 40
680	380LQ681M400A452	0.293	0.148	2.96	4.14	35 x 45
820	380LQ821M400A452	0.243	0.122	2.95	4.15	35 x 45
820	380LQ821M400A052	0.243	0.122	3.25	4.55	35 x 50
420 Vdc (470 Vdc Surge)						
150	380LQ151M420H022	1.33	0.66	1.20	1.65	22 x 30

Type 380LQ 85 °C Compact, High Capacitance Snap-in Capacitors

Higher Capacitance per Case Size




		ESR Max		Ripple Amps		Nominal
		@ 25° C		@ 85 °C		Size
Cap.	Catalog	120 Hz	20 kHz	120 Hz	20 kHz	D x L
(µF)	Part Number	(Ω)	(Ω)	(A)	(A)	(mm)
420 Vdc (470 Vdc Surge)						
150	380LQ151M420J012	1.33	0.66	1.20	1.65	25 x 25
180	380LQ181M420H032	1.1	0.55	1.40	1.95	22 x 35
220	380LQ221M420H042	0.904	0.452	1.50	2.10	22 x 40
220	380LQ221M420J032	0.904	0.452	1.50	2.10	25 x 35
220	380LQ221M420K012	0.904	0.452	1.50	2.10	30 x 25
270	380LQ271M420H452	0.737	0.368	1.75	2.40	22 x 45
270	380LQ271M420J042	0.737	0.368	1.75	2.40	25 x 40
330	380LQ331M420J452	0.603	0.302	1.95	2.75	25 x 45
330	380LQ331M420K022	0.603	0.302	1.95	2.75	30 x 30
390	380LQ391M420J052	0.51	0.255	2.15	3.05	25 x 50
390	380LQ391M420K032	0.51	0.255	2.15	3.05	30 x 35
390	380LQ391M420A022	0.51	0.255	2.15	3.05	35 x 30
470	380LQ471M420K042	0.423	0.212	2.45	3.40	30 x 40
470	380LQ471M420A032	0.423	0.212	2.45	3.40	35 x 35
560	380LQ561M420K452	0.355	0.178	2.75	3.85	30 x 45
560	380LQ561M420A042	0.355	0.178	2.75	3.85	35 x 40
680	380LQ681M420A452	0.293	0.146	3.10	4.35	35 x 45
82	380LQ820M450H012	2.426	1.213	0.83	1.16	22 x 25
100	380LQ101M450H012	1.99	0.995	0.93	1.30	22 x 25
120	380LQ121M450H022	1.656	0.829	1.04	1.46	22 x 30
150	380LQ151M450H032	1.326	0.663	1.19	1.67	22 x 35

		ESR Max		Ripple Amps		Nominal
		@ 25° C		@ 85 °C		Size
Cap.	Catalog	120 Hz	20 kHz	120 Hz	20 kHz	D x L
(µF)	Part Number	(Ω)	(Ω)	(A)	(A)	(mm)
450 Vdc (500 Vdc Surge)						
150	380LQ151M450J022	1.326	0.663	1.19	1.67	25 x 30
180	380LQ181M450H042	1.105	0.553	1.35	1.89	22 x 40
180	380LQ181M450J022	1.105	0.553	1.35	1.89	25 x 30
220	380LQ221M450H452	0.904	0.452	1.55	2.17	22 x 45
220	380LQ221M450J032	0.904	0.452	1.45	2.00	25 x 35
220	380LQ221M450J042	0.904	0.452	1.55	2.17	25 x 40
220	380LQ221M450K022	0.904	0.452	1.55	2.17	30 x 30
220	380LQ221M450A012	0.904	0.452	1.55	2.17	35 x 25
270	380LQ271M450H052	0.737	0.368	1.78	2.49	22 x 50
270	380LQ271M450J042	0.737	0.368	1.78	2.49	25 x 40
270	380LQ271M450K022	0.737	0.368	1.78	2.49	30 x 30
330	380LQ331M450J052	0.603	0.302	2.01	2.81	25 x 50
330	380LQ331M450K032	0.603	0.302	1.90	2.60	30 x 35
330	380LQ331M450K042	0.603	0.302	2.01	2.81	30 x 40
330	380LQ331M450A022	0.603	0.302	2.01	2.81	35 x 30
390	380LQ391M450K042	0.510	0.255	2.24	3.14	30 x 40
390	380LQ391M450A032	0.510	0.255	2.24	3.14	35 x 35
470	380LQ471M450K452	0.423	0.212	2.53	3.54	30 x 45
470	380LQ471M450A042	0.423	0.212	2.53	3.54	35 x 40
560	380LQ561M450K052	0.355	0.178	2.82	3.95	30 x 50
560	380LQ561M450A452	0.355	0.178	2.82	3.95	35 x 45
680	380LQ681M450A052	0.293	0.146	3.00	4.25	35 x 50

Type 380LQ 85 °C Compact, High Capacitance Snap-in Capacitors

Higher Capacitance per Case Size

Typical Performance Curves

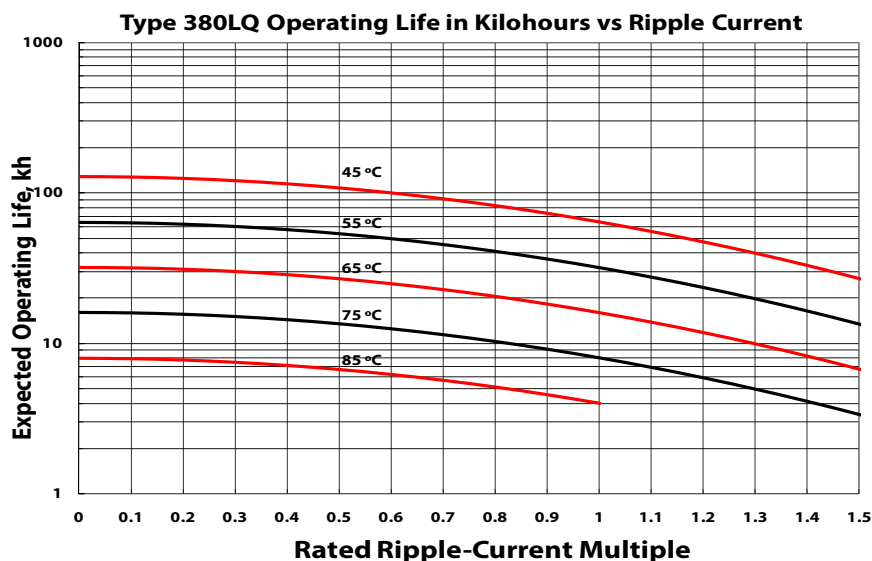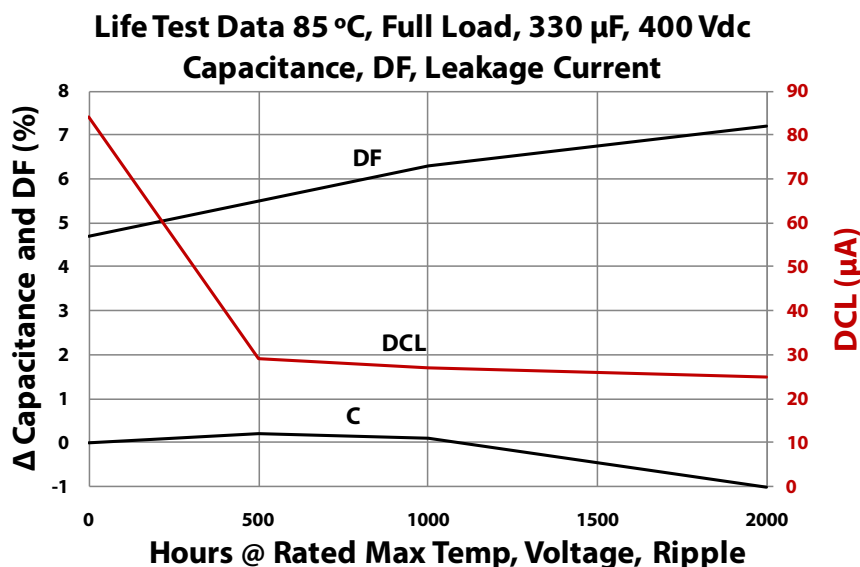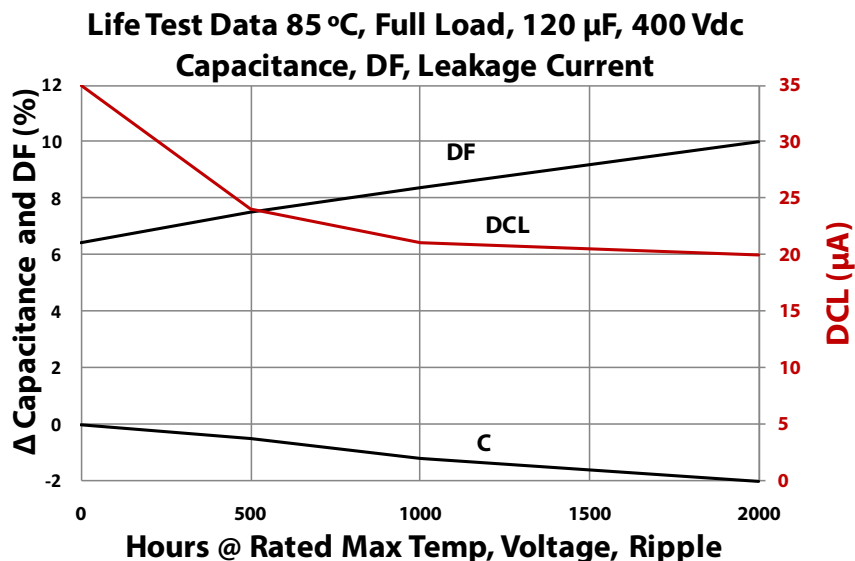

Notice and Disclaimer: All product drawings, descriptions, specifications, statements, information and data (collectively, the "Information") in this datasheet or other publication are subject to change. The customer is responsible for checking, confirming and verifying the extent to which the Information contained in this datasheet or other publication is applicable to an order at the time the order is placed. All Information given herein is believed to be accurate and reliable, but it is presented without any guarantee, warranty, representation or responsibility of any kind, expressed or implied. Statements of suitability for certain applications are based on the knowledge that the Cornell Dubilier company providing such statements ("Cornell Dubilier") has of operating conditions that such Cornell Dubilier company regards as typical for such applications, but are not intended to constitute any guarantee, warranty or representation regarding any such matter – and Cornell Dubilier specifically and expressly disclaims any guarantee, warranty or representation concerning the suitability for a specific customer application, use, storage, transportation, or operating environment. The Information is intended for use only by customers who have the requisite experience and capability to determine the correct products for their application. Any technical advice inferred from this Information or otherwise provided by Cornell Dubilier with reference to the use of any Cornell Dubilier products is given gratis (unless otherwise specified by Cornell Dubilier), and Cornell Dubilier assumes no obligation or liability for the advice given or results obtained. Although Cornell Dubilier strives to apply the most stringent quality and safety standards regarding the design and manufacturing of its products, in light of the current state of the art, isolated component failures may still occur. Accordingly, customer applications which require a high degree of reliability or safety should employ suitable designs or other safeguards (such as installation of protective circuitry or redundancies or other appropriate protective measures) in order to ensure that the failure of an electrical component does not result in a risk of personal injury or property damage. Although all product-related warnings, cautions and notes must be observed, the customer should not assume that all safety measures are indicated in such warnings, cautions and notes, or that other safety measures may not be required.