



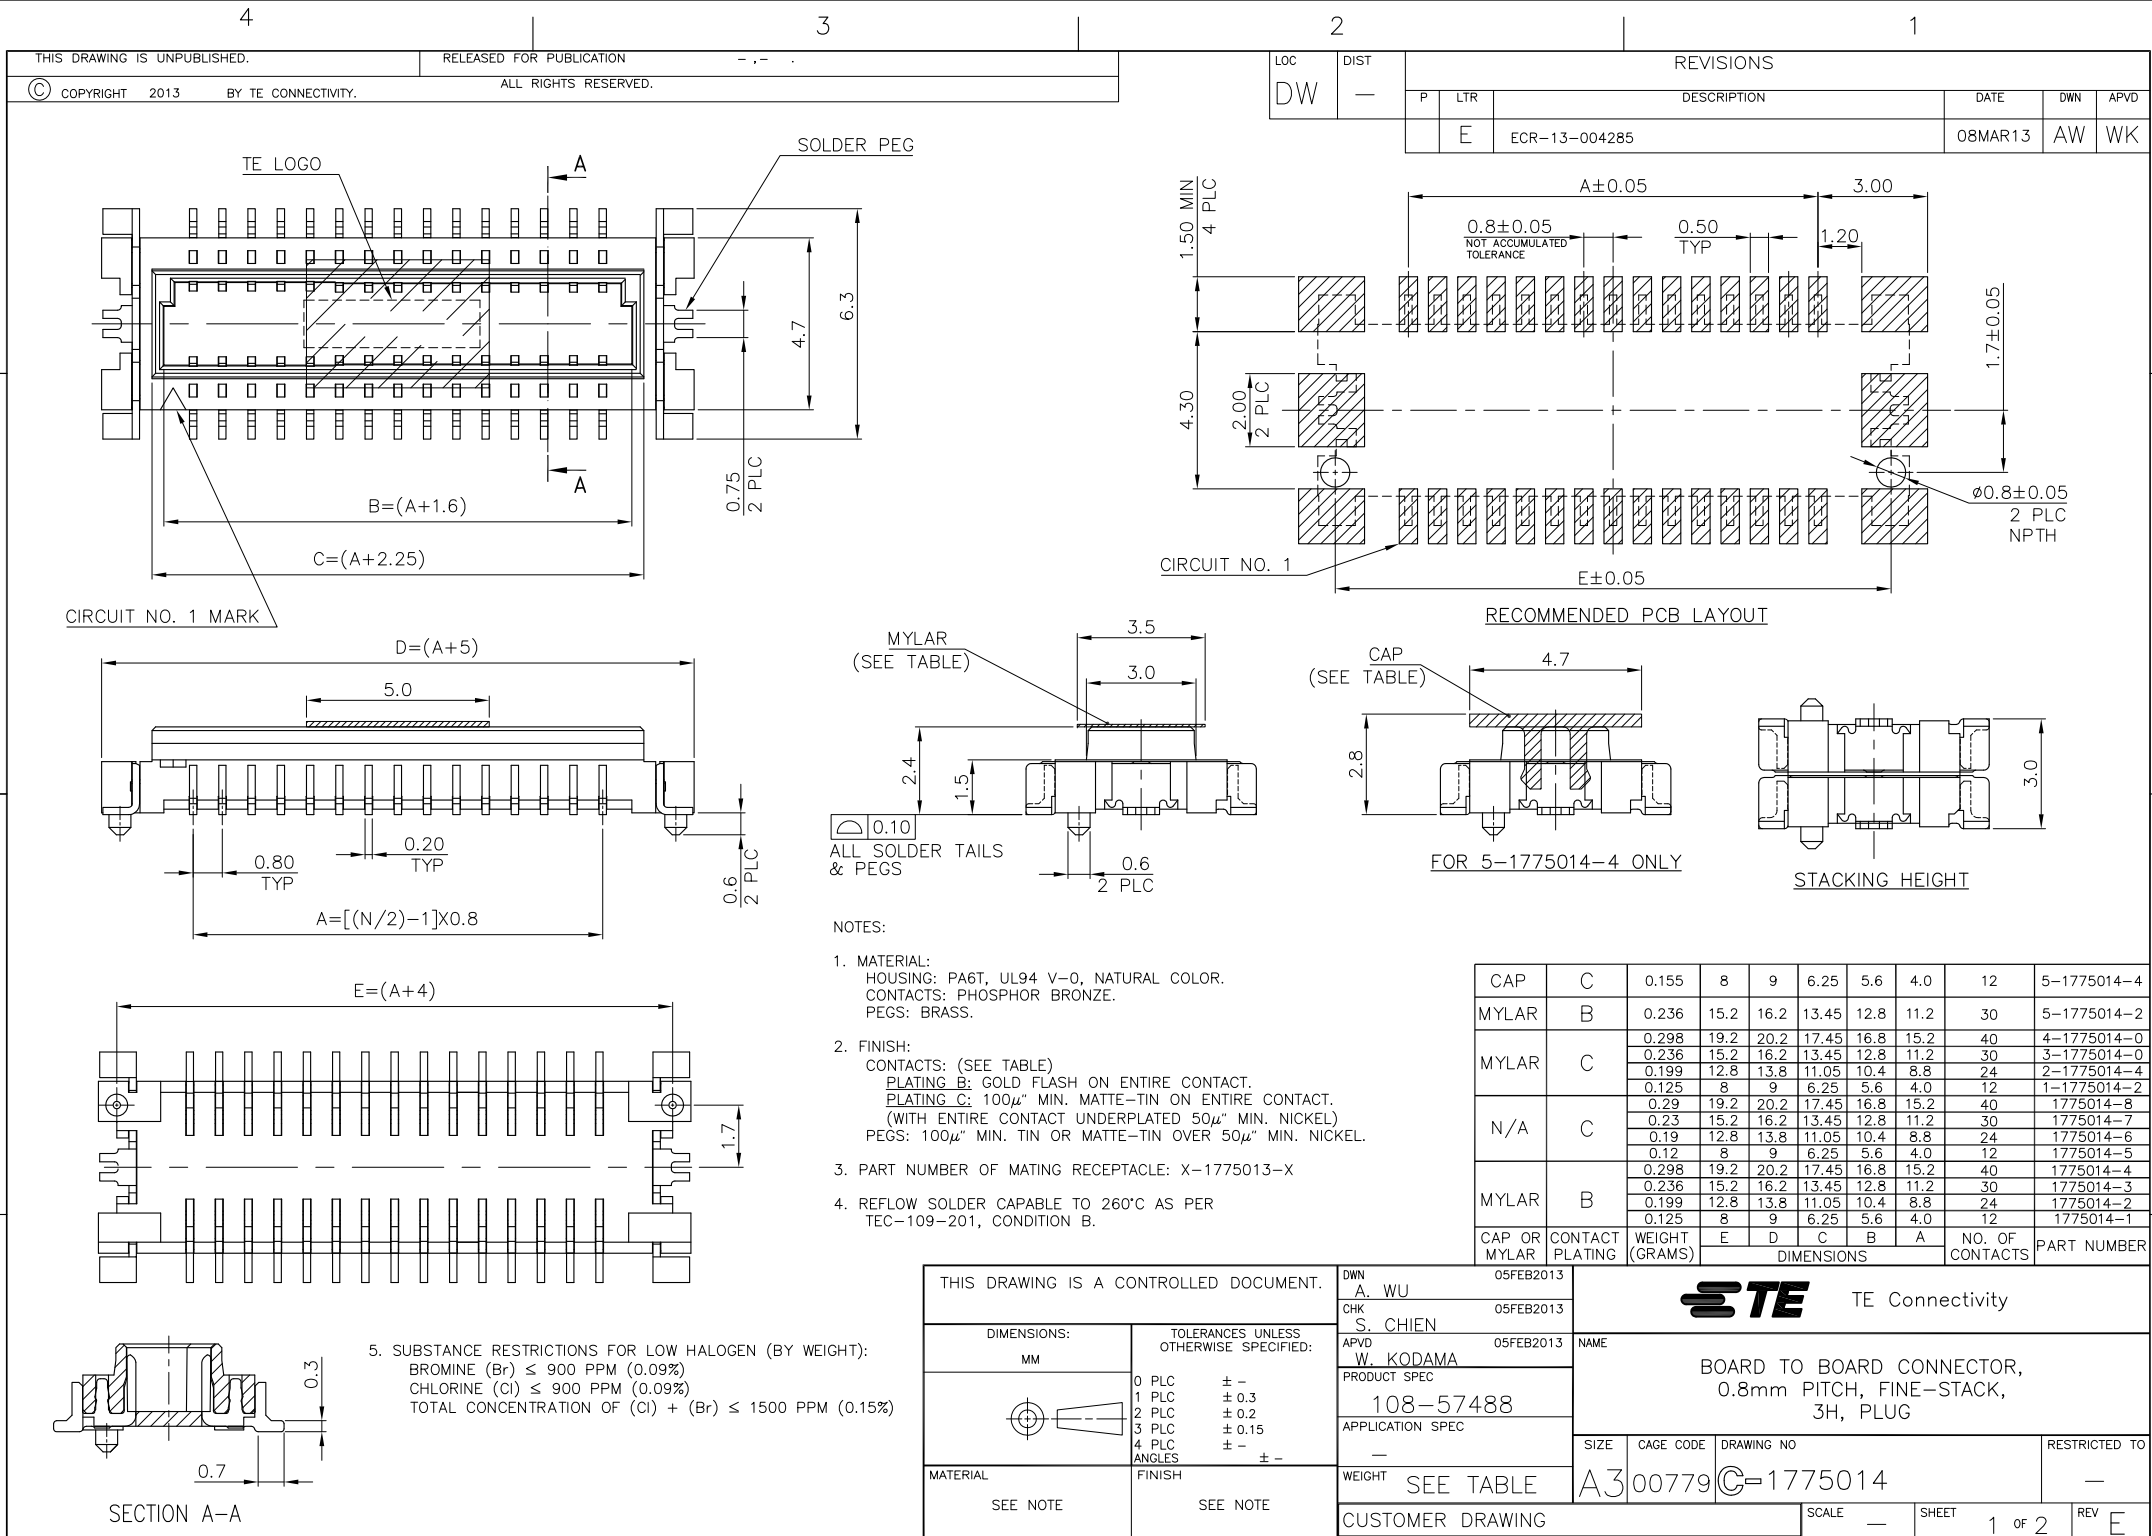


1471-19 (3/11)

USER DIRECTION OF UNREELING

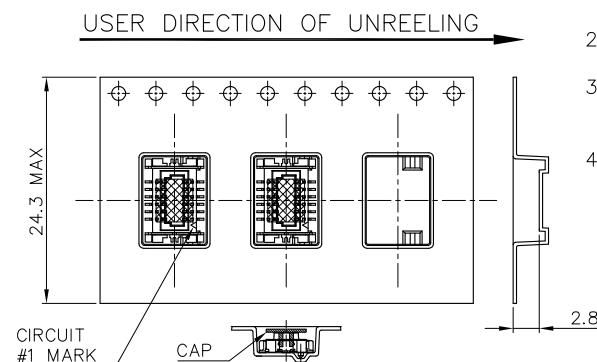


FOR 5-1775014-4 ONLY

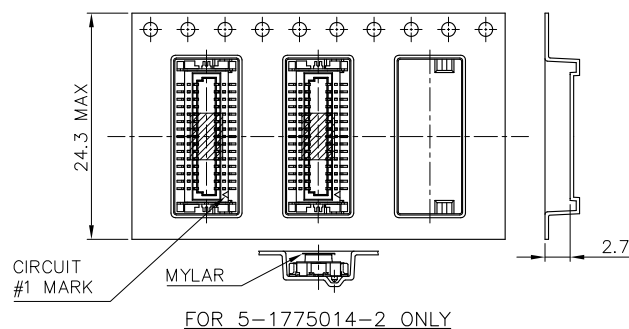

- NOTES:

1. MATERIAL:
BOX: FIBREBOARD, CORRUGATED, DOUBLE WALL.
COVER TAPE: PET, TRANSPARENT COLOR.
CARRIER TAPE: POLYSTYRENES, BLACK COLOR.
REEL: HIPS, BLUE COLOR.
BAG: POLYETHYLENES, TRANSPARENT COLOR.
2. EACH BAG SHALL BE INCLUDED DESICCANT.
3. PEELING STRENGTH: 0.1 ~ 1.3 N (10 ~ 130 GRAMS).
4. PEELING SPEED: 300 mm/min.

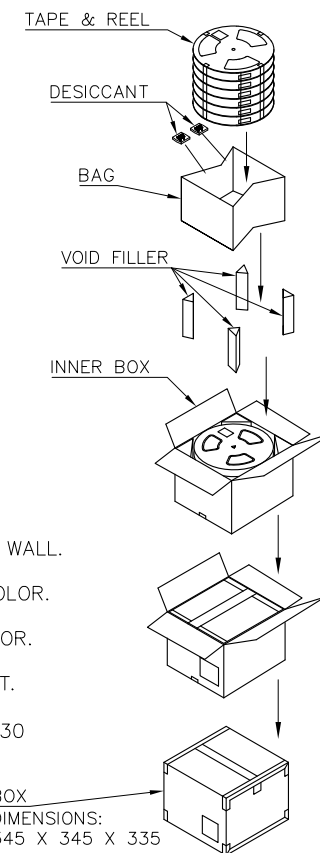

12000	1500	8	12.35	4.85	40
15000	1500	10	11.2	3.9	30
15000	1500	10	10.12	3.25	24
15000	1500	10	9.25	2.35	12
QUANTITY	PCS /TAPE	REELS /BOX	G/W (Kg)	N/W (Kg)	NO. OF CONTACTS

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN	—
CHK	—
APVD	—

DIMENSION

MM

TOLERANCES UNLESS
OTHERWISE SPECIFIED:

PRODUCT SPEC

APPLICATION SPEC

WEIGHT

CUSTOMER DRAWING



TE Connectivity

BOARD TO BOARD CONNECTOR,
0.8mm PITCH, FINE-STACK,
3H, PLUG

	SIZ
--	-----

CAGE CODE	
-----------	--

DE	DRAWING NO
----	------------

RESTRICTED TO

A

300779

9|C-1775014

SCALE

	SHEET
--	-------

2 OF 2

REV	
-----	--