



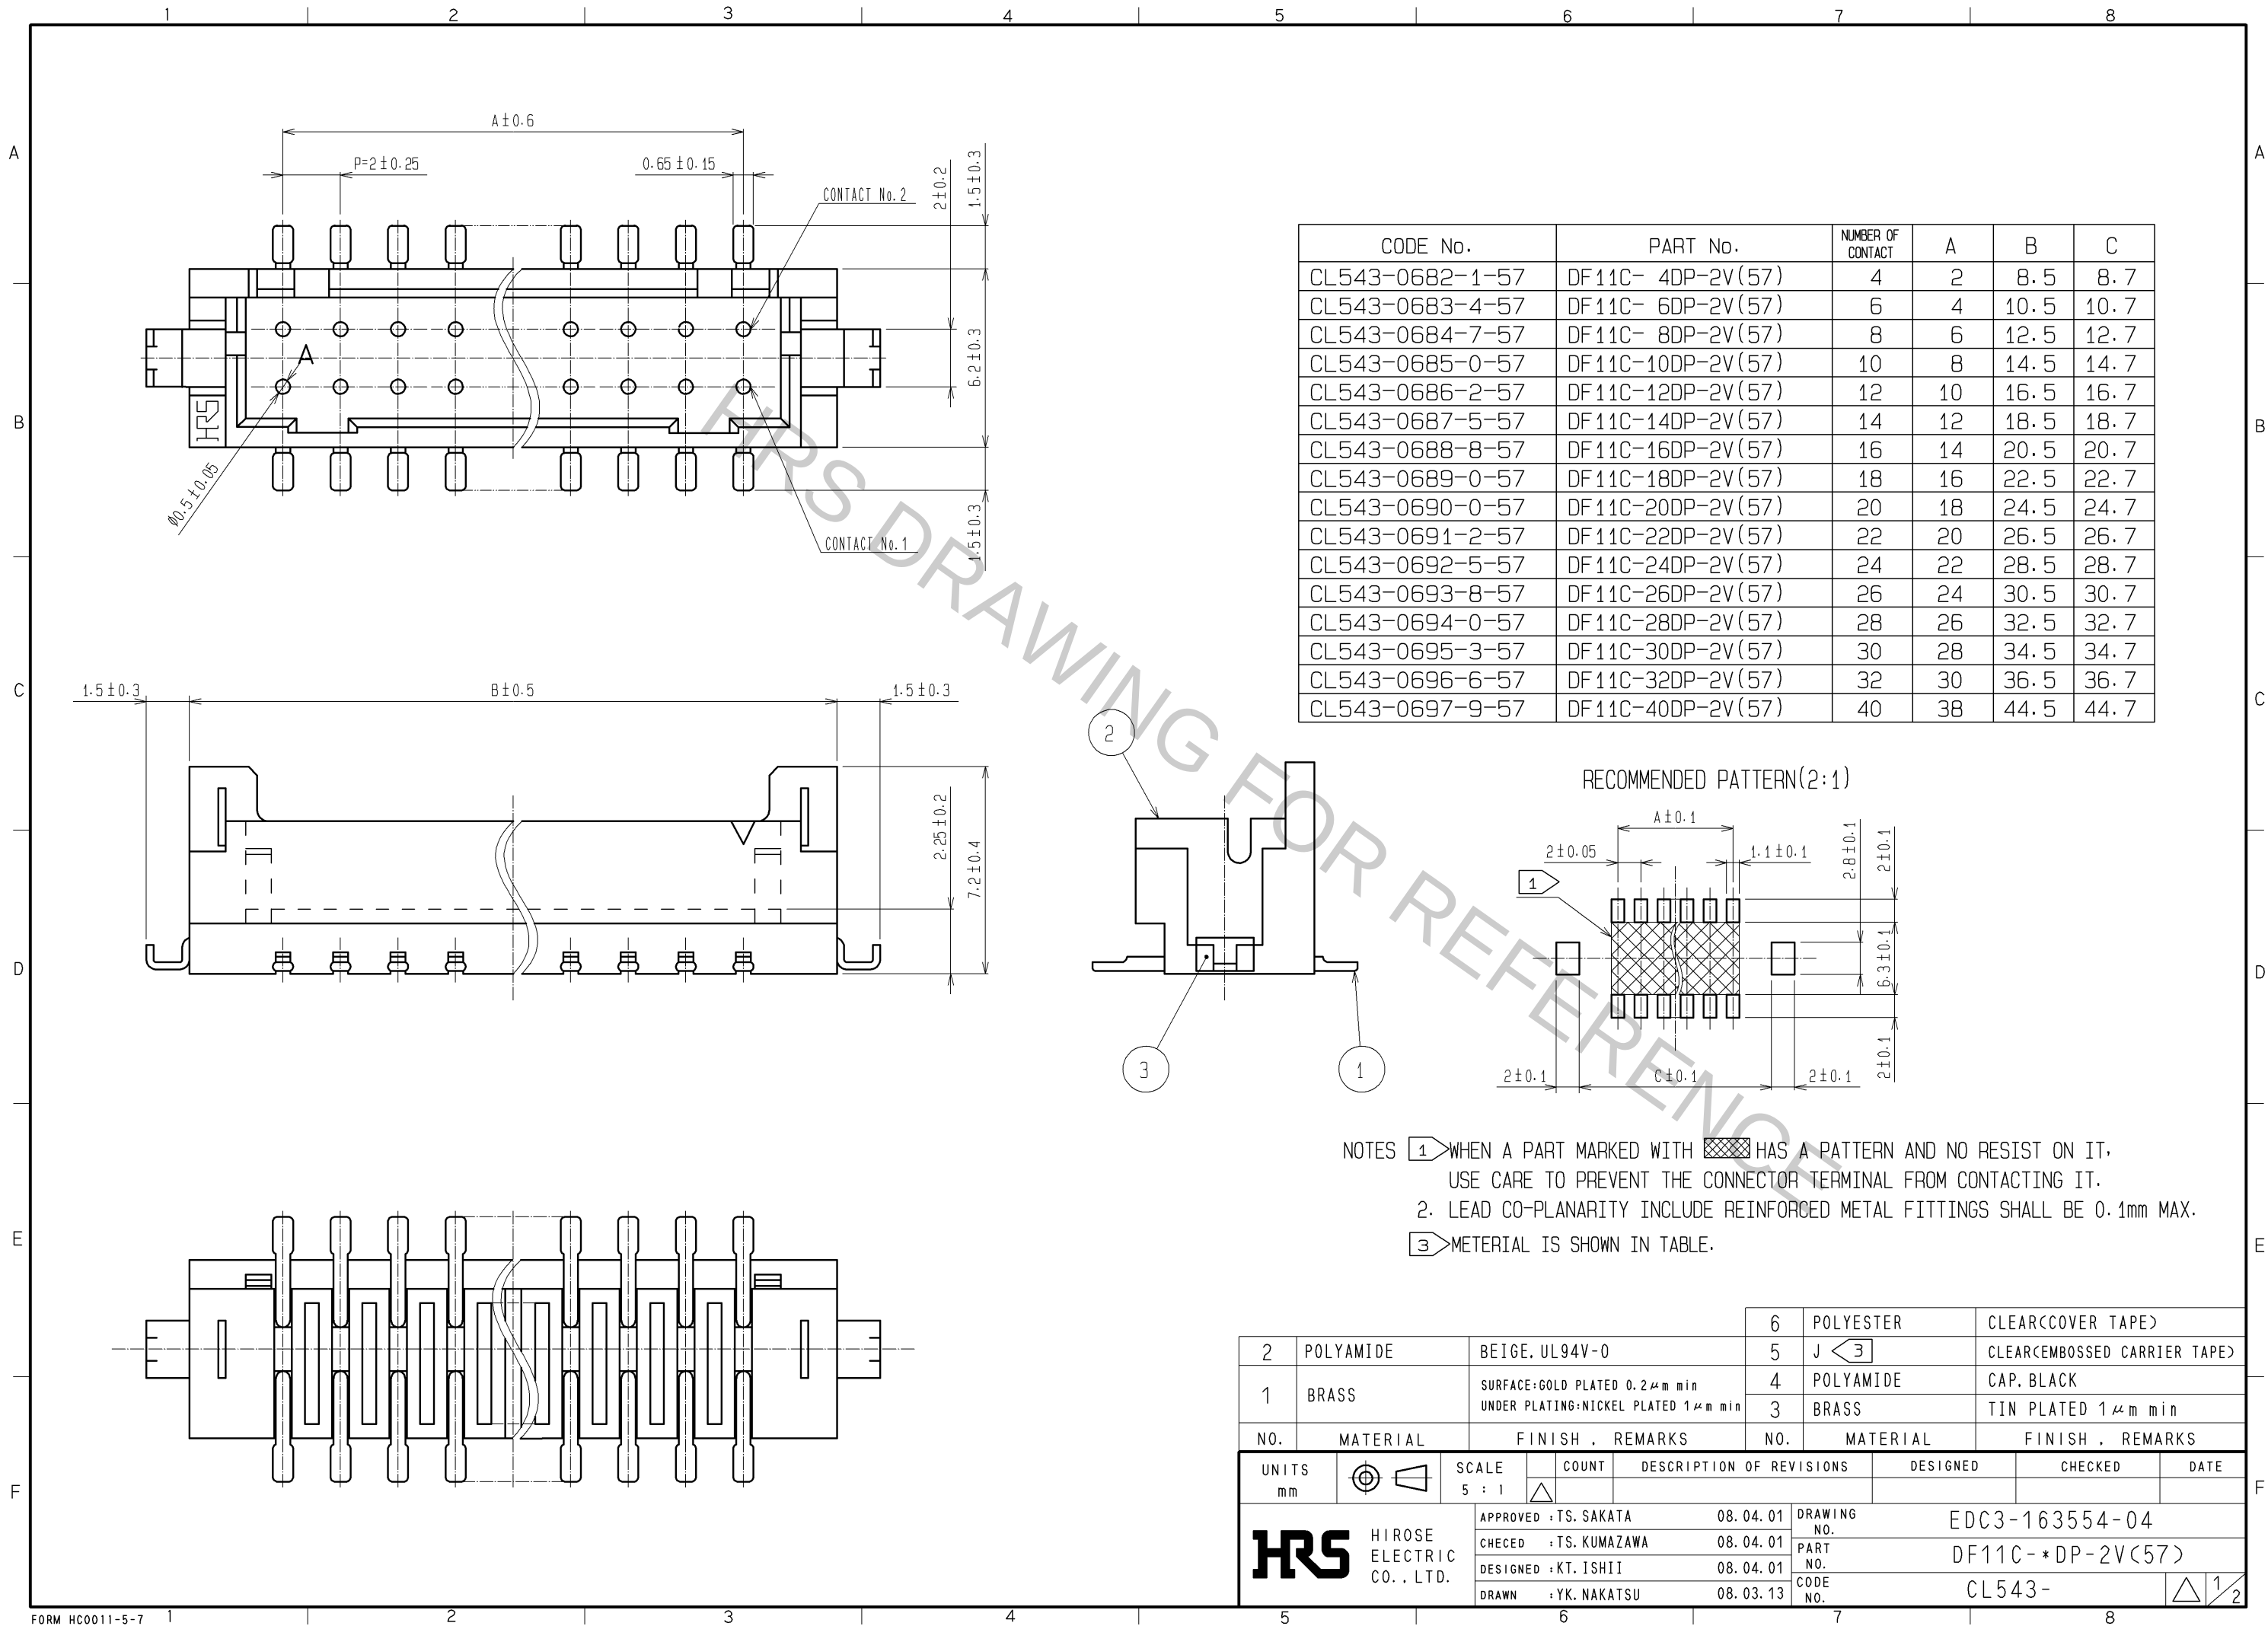

CODE No.	NUMBER OF CONTACT	D	E	F	G	H	J
DF 11C- 4DP-2V(57)	4	24.0	—	11.5	13.2	24.4	PS
DF 11C- 6DP-2V(57)	6	24.0	—	11.5	15.2	24.4	A-PET
DF 11C- 8DP-2V(57)	8	24.0	—	11.5	17.2	24.4	PS
DF 11C-10DP-2V(57)	10	32.0	28.4	14.2	19.2	32.4	PS
DF 11C-12DP-2V(57)	12	32.0	28.4	14.2	21.2	32.4	PS
DF 11C-14DP-2V(57)	14	44.0	40.4	20.2	23.2	44.4	PS
DF 11C-16DP-2V(57)	16	44.0	40.4	20.2	25.2	44.4	A-PET
DF 11C-18DP-2V(57)	18	44.0	40.4	20.2	27.2	44.4	A-PET
DF 11C-20DP-2V(57)	20	44.0	40.4	20.2	29.2	44.4	PS
DF 11C-22DP-2V(57)	22	44.0	40.4	20.2	31.2	44.4	PS
DF 11C-24DP-2V(57)	24	56.0	52.4	26.2	33.2	56.4	PS
DF 11C-26DP-2V(57)	26	56.0	52.4	26.2	35.2	56.4	A-PET
DF 11C-28DP-2V(57)	28	56.0	52.4	26.2	37.2	56.4	A-PET
DF 11C-30DP-2V(57)	30	56.0	52.4	26.2	39.2	56.4	PS
DF 11C-32DP-2V(57)	32	56.0	52.4	26.2	41.2	56.4	PS
DF 11C-40DP-2V(57)	40	72.0	68.4	34.2	49.2	72.4	PS

STYLE AND DIMENSION OF REEL

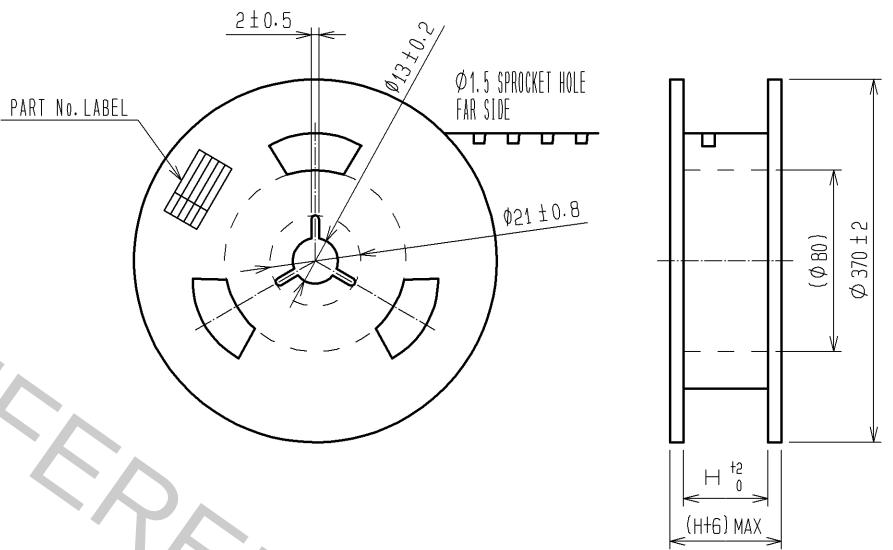

- NOTES 4 1 REEL:500 CONNECTORS.
- 5 AT THE BEGINNING OF THE REEL, 15 COMPONENTS SHALL BE EMPTY.
AT THE END OF THE REEL, 10 COMPONENTS SHALL BE EMPTY.
- 6 WHEN THE TAPE WIDTH IS 32, 44, 56, 72 mm, SPROCKET HOLES SHALL BE
SET ON BOTH SIDE OF REEL AS SHOWN ON THIS DRAWING.
- 7 DETAIL OF PART NO. LABEL IS WRITTEN IN JAPANESE.
- 8 THE REEL IS POLYETHYLENE PACKAGED WITH AN DRY AGENT INSIDE
FOR MOISTURE-PROOF PACKAGING.
- 9 FOR THE STORAGE OF 168 HOURS OR MORE AFTER OPENING THE PACKAGE
KEEP THE PRODUCTS UNDER MOISTURE PROOF CONDITIONS.
- 10 EXCEPT ON THE MATING SURFACE, COMPONENT INFLATION DOES NOT
AFFECT THE PRODUCTS PERFORMANCE.

SUPPLIER
 QUANTITY
 PART No.
 CODE No.
 DATE OF MANUFACTURED

7>DETAIL OF PART No. LABEL

生 産 月 日	年 月 日
図 番	CL543-****-*57
品 名	DF11C-*DP-2V(57)
納 入 数 量	500 個
納 入 者	ヒロセ電機 株式会社

	DRAWING NO.	EDC3-163554-04		
	PART NO.	DF11C-*DP-2V(57)		
	CODE NO.	543-	△	2/2