


ALL RIGHTS RESERVED. NO PORTION OF THIS PUBLICATION, WHETHER IN WHOLE OR IN PART CAN BE REPRODUCED WITHOUT THE EXPRESS WRITTEN CONSENT OF SPC TECHNOLOGY.

REVISIONS					DOC. NO. SPC-F005 * Effective: 12/21/98 * DCP No: 680			
DCP #	REV	DESCRIPTION	DRAWN	DATE	CHECKD	DATE	APPRVD	DATE
	B	Revised and Redrawn		1/8/93				
1210	C	Renamed - was 3-881-*	JWM	7/26/01	JC	8/30/01	JC	8/30/01

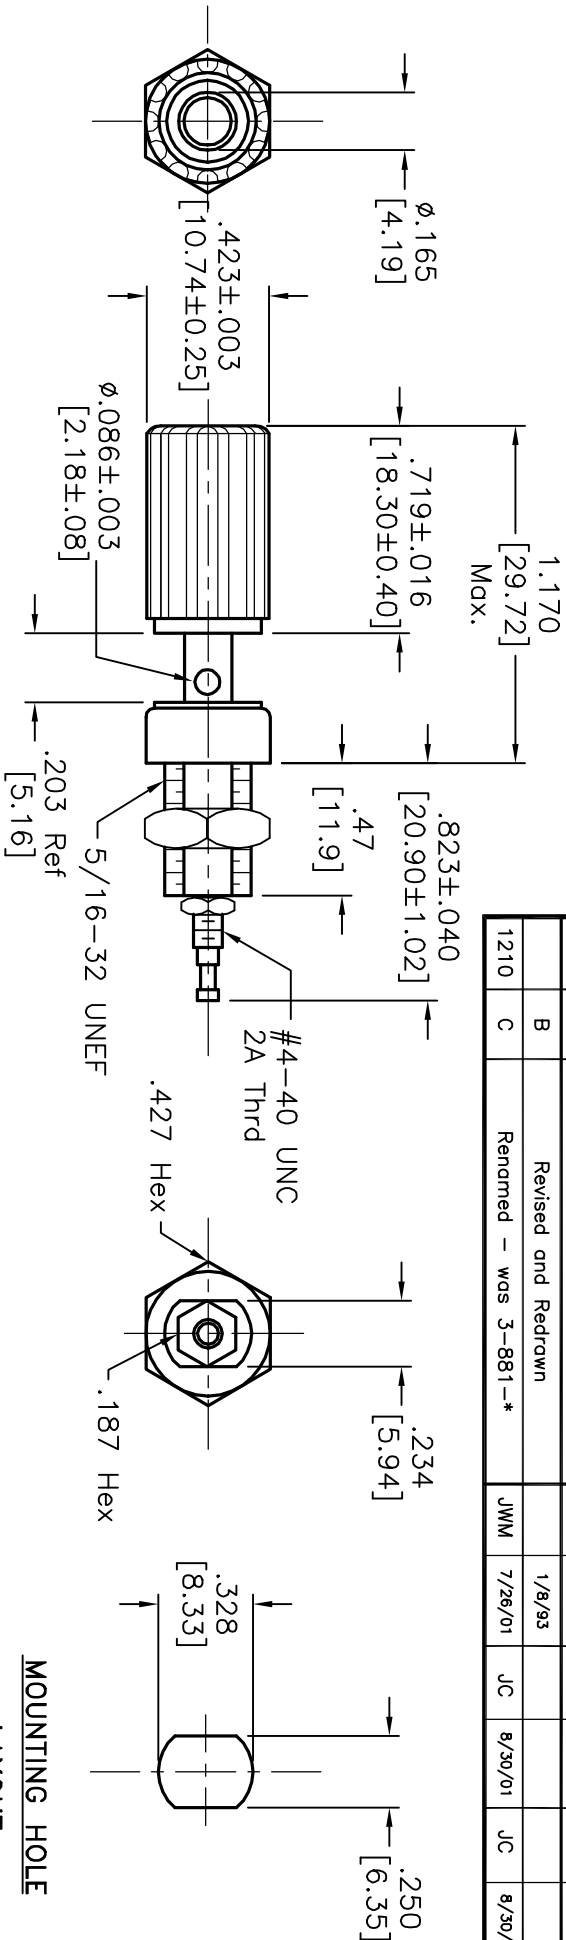

NOTES:

- MATERIAL:
STUD: BRASS PER QQ-B-626D
FINISH: SILVER
- INSULATING MATERIAL: NYLON
66 PER ASTM D4066
THUMB NUT: NYLON 66 PER
ASTM D4066
- HARDWARE: GOLD PLATED NUTS
- PANEL THICKNESS: UP TO .281" [7.14 MM]
- CURRENT RATING: 15 AMPS
- FLAMMABILITY: UL94V-2 SELF-EXTINGUISHING
- CONTINUOUS USE TEMPERATURE:
-40°F (-40°C) TO 185°F (85°C)
- BREAKDOWN VOLTAGE: 5700 Vrms MINIMUM
- STUD-TO-PANEL CAP.: 3.3 pF NOMINAL
- CONTACT RESISTANCE: N.A.
- FEATURES TURRET TERMINAL
OF INSTALLATION
- HAS A CAPTIVE THUMB NUT
- INSULATED BODY IS FLATTENED TO PREVENT
TURNING.
- WEIGHT: .015 LBS.
- BODY THREAD STRIPPING TORQUE:
6.0 IN. LBS [7.0 KG CM]

MOUNTING HOLE
LAYOUT

PART NUMBER	COLOR
3-881-BK	BLACK
3-881-GR	GREEN
3-881-R	RED
3-881-W	WHITE
3-881-Y	YELLOW

DISCLAIMER
ALL STATEMENTS AND TECHNICAL INFORMATION CONTAINED HEREIN ARE BASED UPON INFORMATION AND/OR TESTS WE BELIEVE TO BE ACCURATE AND RELIABLE. SINCE CONDITIONS OF USE ARE BEYOND OUR CONTROL, THE USER SHALL DETERMINE THE SUITABILITY OF THE PRODUCT FOR THE INTENDED USE AND ASSUME ALL RISK AND LIABILITY WHATSOEVER IN CONNECTION THEREWITH.



SPC TECHNOLOGY

Tolerances Unless Otherwise Specified:			
.X=±.015			
.XX=±.010			
.XXX=±.005			
DRAWN BY:		DATE:	
JP		1/8/93	
CHECKED BY:		DATE:	
JOHN COLE		1/15/93	
APPROVED BY:		DATE:	
J Lisko		1/19/93	
DRAWING TITLE:			
Binding Posts (Standard)			
SIZE	DWG. NO.	ELECTRONIC FILE	
A	TA-377	TA-377.dwg	REV
SCALE:	NTS	U.O.M.: INCHES [mm]	SHEET: 1 OF 1