



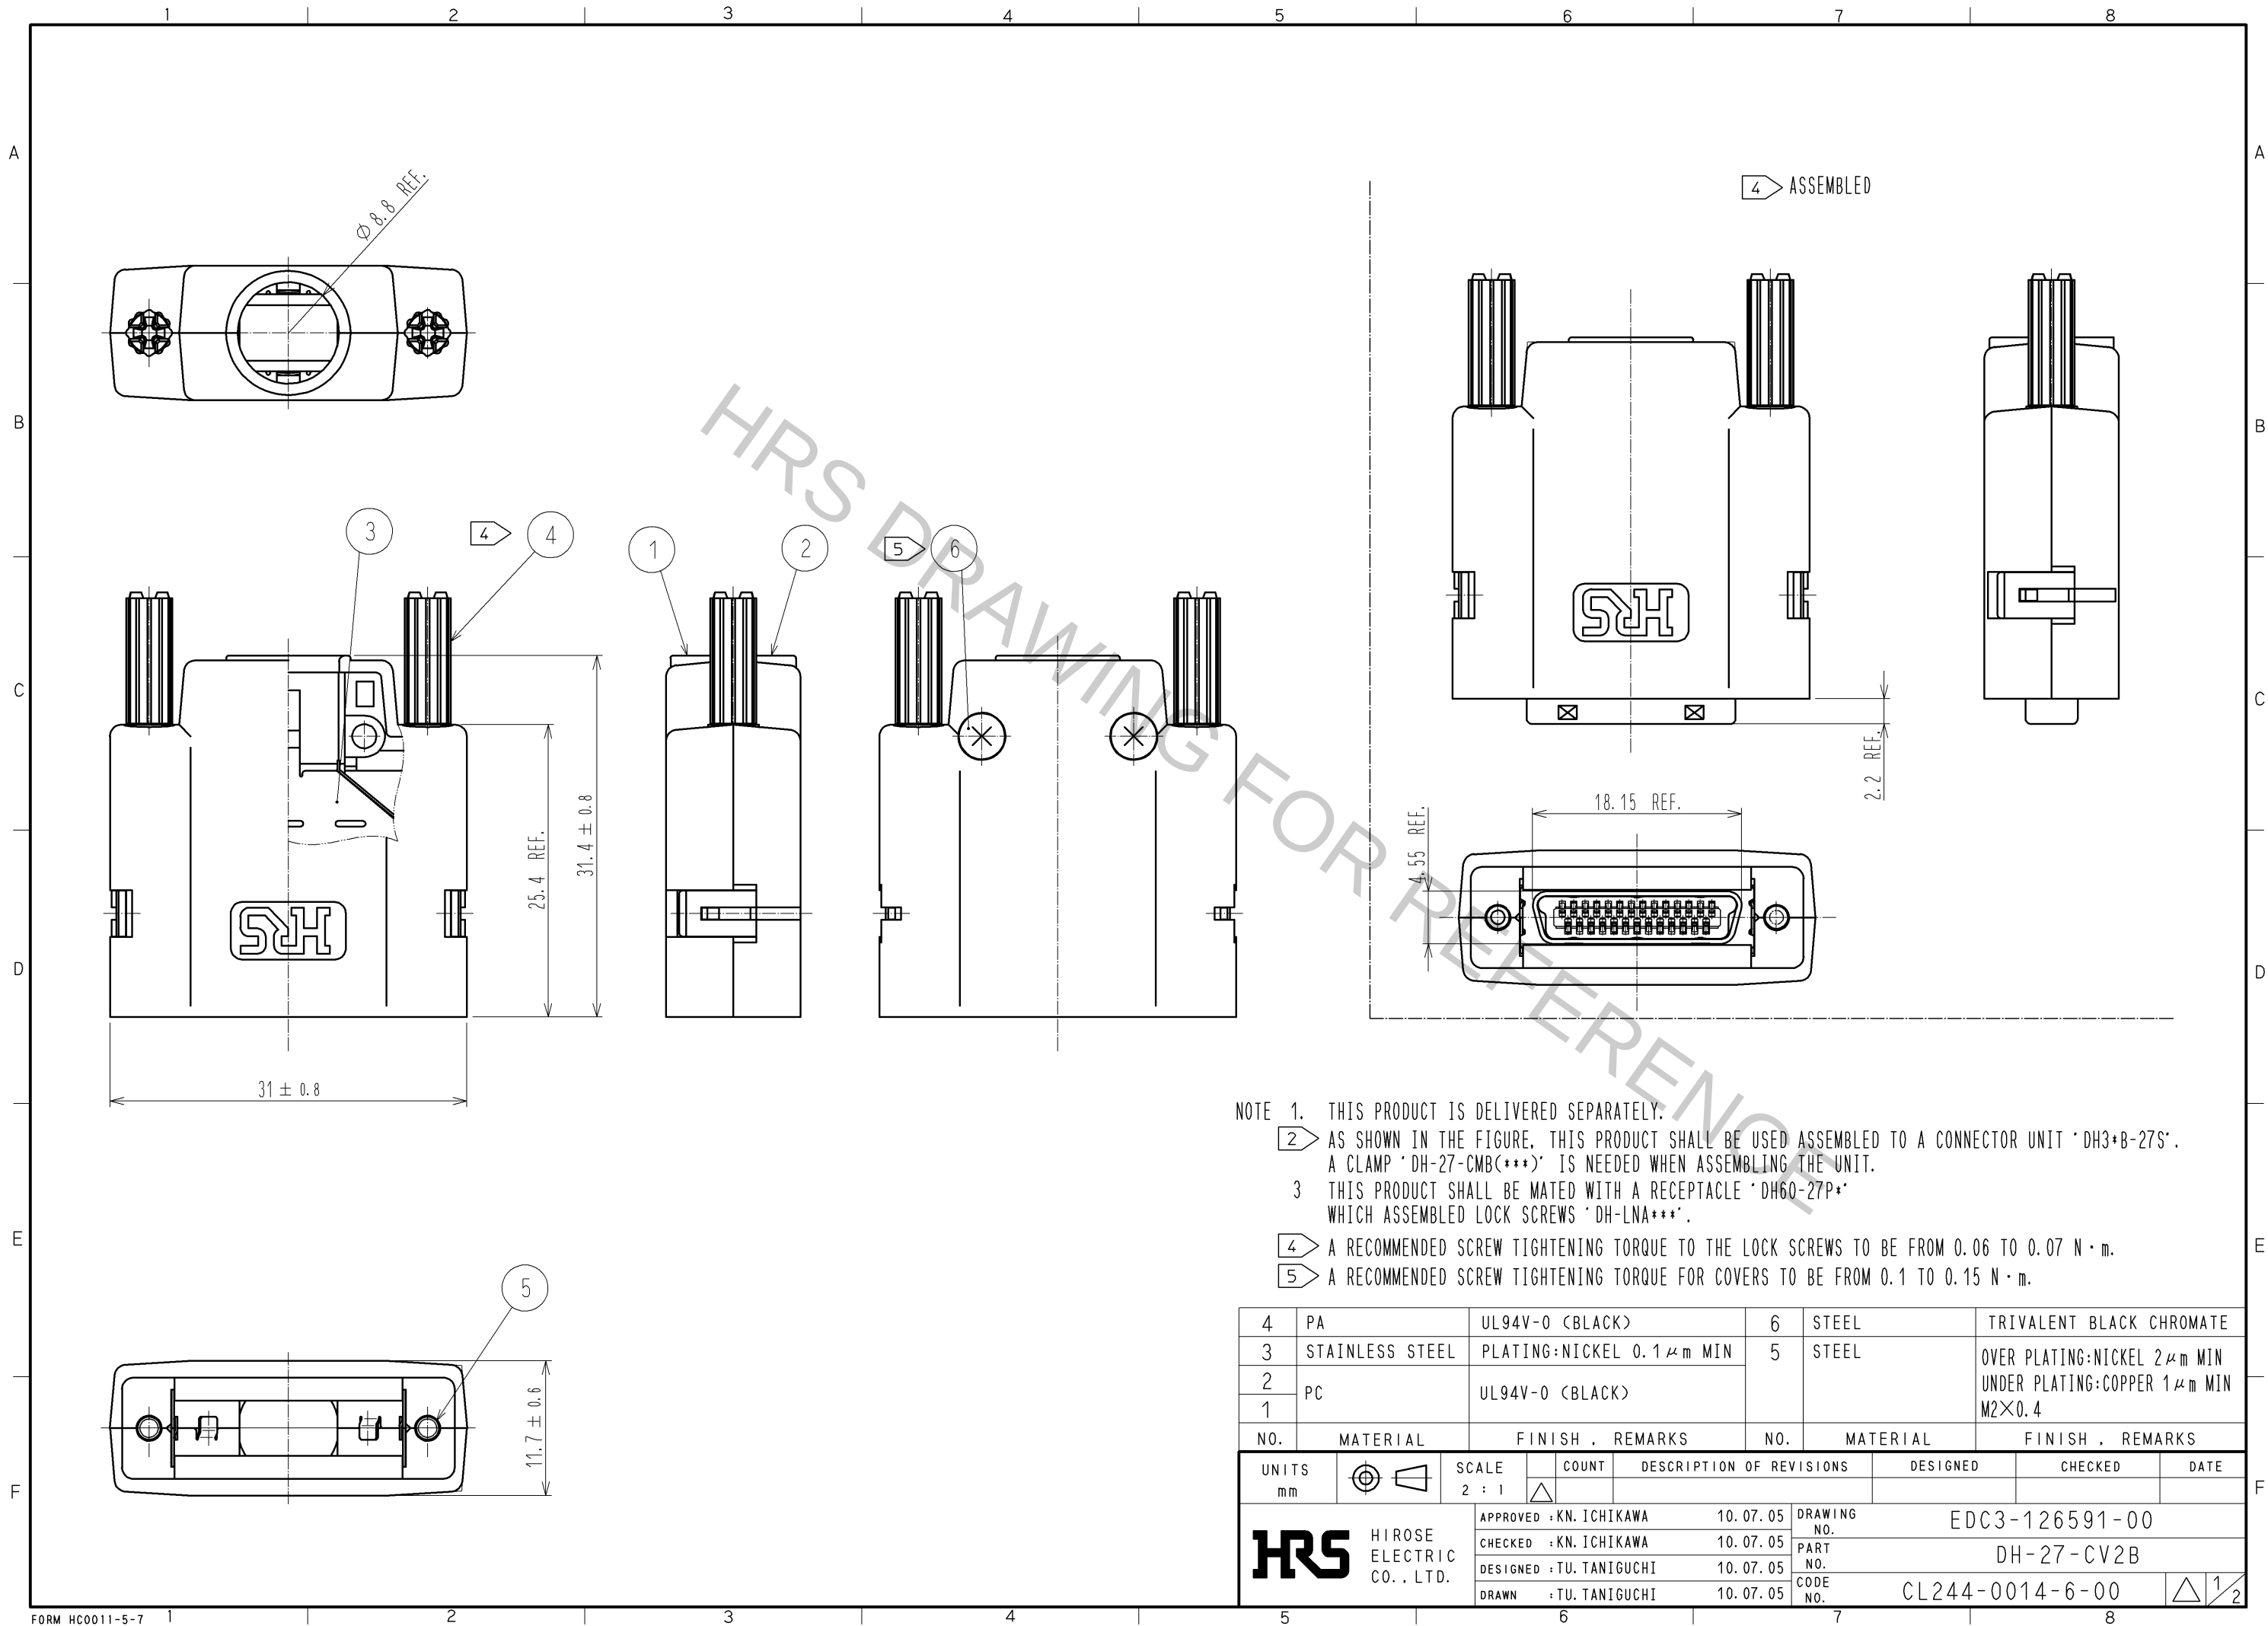

- NOTE 1. THIS PRODUCT IS DELIVERED SEPARATELY.
2 AS SHOWN IN THE FIGURE, THIS PRODUCT SHALL BE USED ASSEMBLED TO A CONNECTOR UNIT 'DH3*B-27S'.
A CLAMP 'DH-27-CMB(***)' IS NEEDED WHEN ASSEMBLING THE UNIT.
3 THIS PRODUCT SHALL BE MATED WITH A RECEPTACLE 'DH60-27P+'
WHICH ASSEMBLED LOCK SCREWS 'DH-LNA***'.
4 A RECOMMENDED SCREW TIGHTENING TORQUE TO THE LOCK SCREWS TO BE FROM 0.06 TO 0.07 N · m.
5 A RECOMMENDED SCREW TIGHTENING TORQUE FOR COVERS TO BE FROM 0.1 TO 0.15 N · m.

4	PA	UL94V-0 (BLACK)	6	STEEL	TRIVALENT BLACK CHROMATE
3	STAINLESS STEEL	PLATING:NICKEL 0.1 μm MIN	5	STEEL	OVER PLATING:NICKEL 2 μm MIN UNDER PLATING:COPPER 1 μm MIN
2	PC	UL94V-0 (BLACK)			M2×0.4
1					
NO.	MATERIAL	FINISH . REMARKS	NO.	MATERIAL	FINISH . REMARKS
UNITS mm		SCALE 2 : 1	COUNT △	DESCRIPTION OF REVISIONS	DESIGNED CHECKED DATE
HIROSE ELECTRIC CO., LTD.		APPROVED : KN. ICHIKAWA	10.07.05	DRAWING NO.	EDC3-126591-00
		CHECKED : KN. ICHIKAWA	10.07.05	PART NO.	DH-27-CV2B
		DESIGNED : TU. TANIGUCHI	10.07.05	CODE NO.	CL244-0014-6-00
		DRAWN : TU. TANIGUCHI	10.07.05		

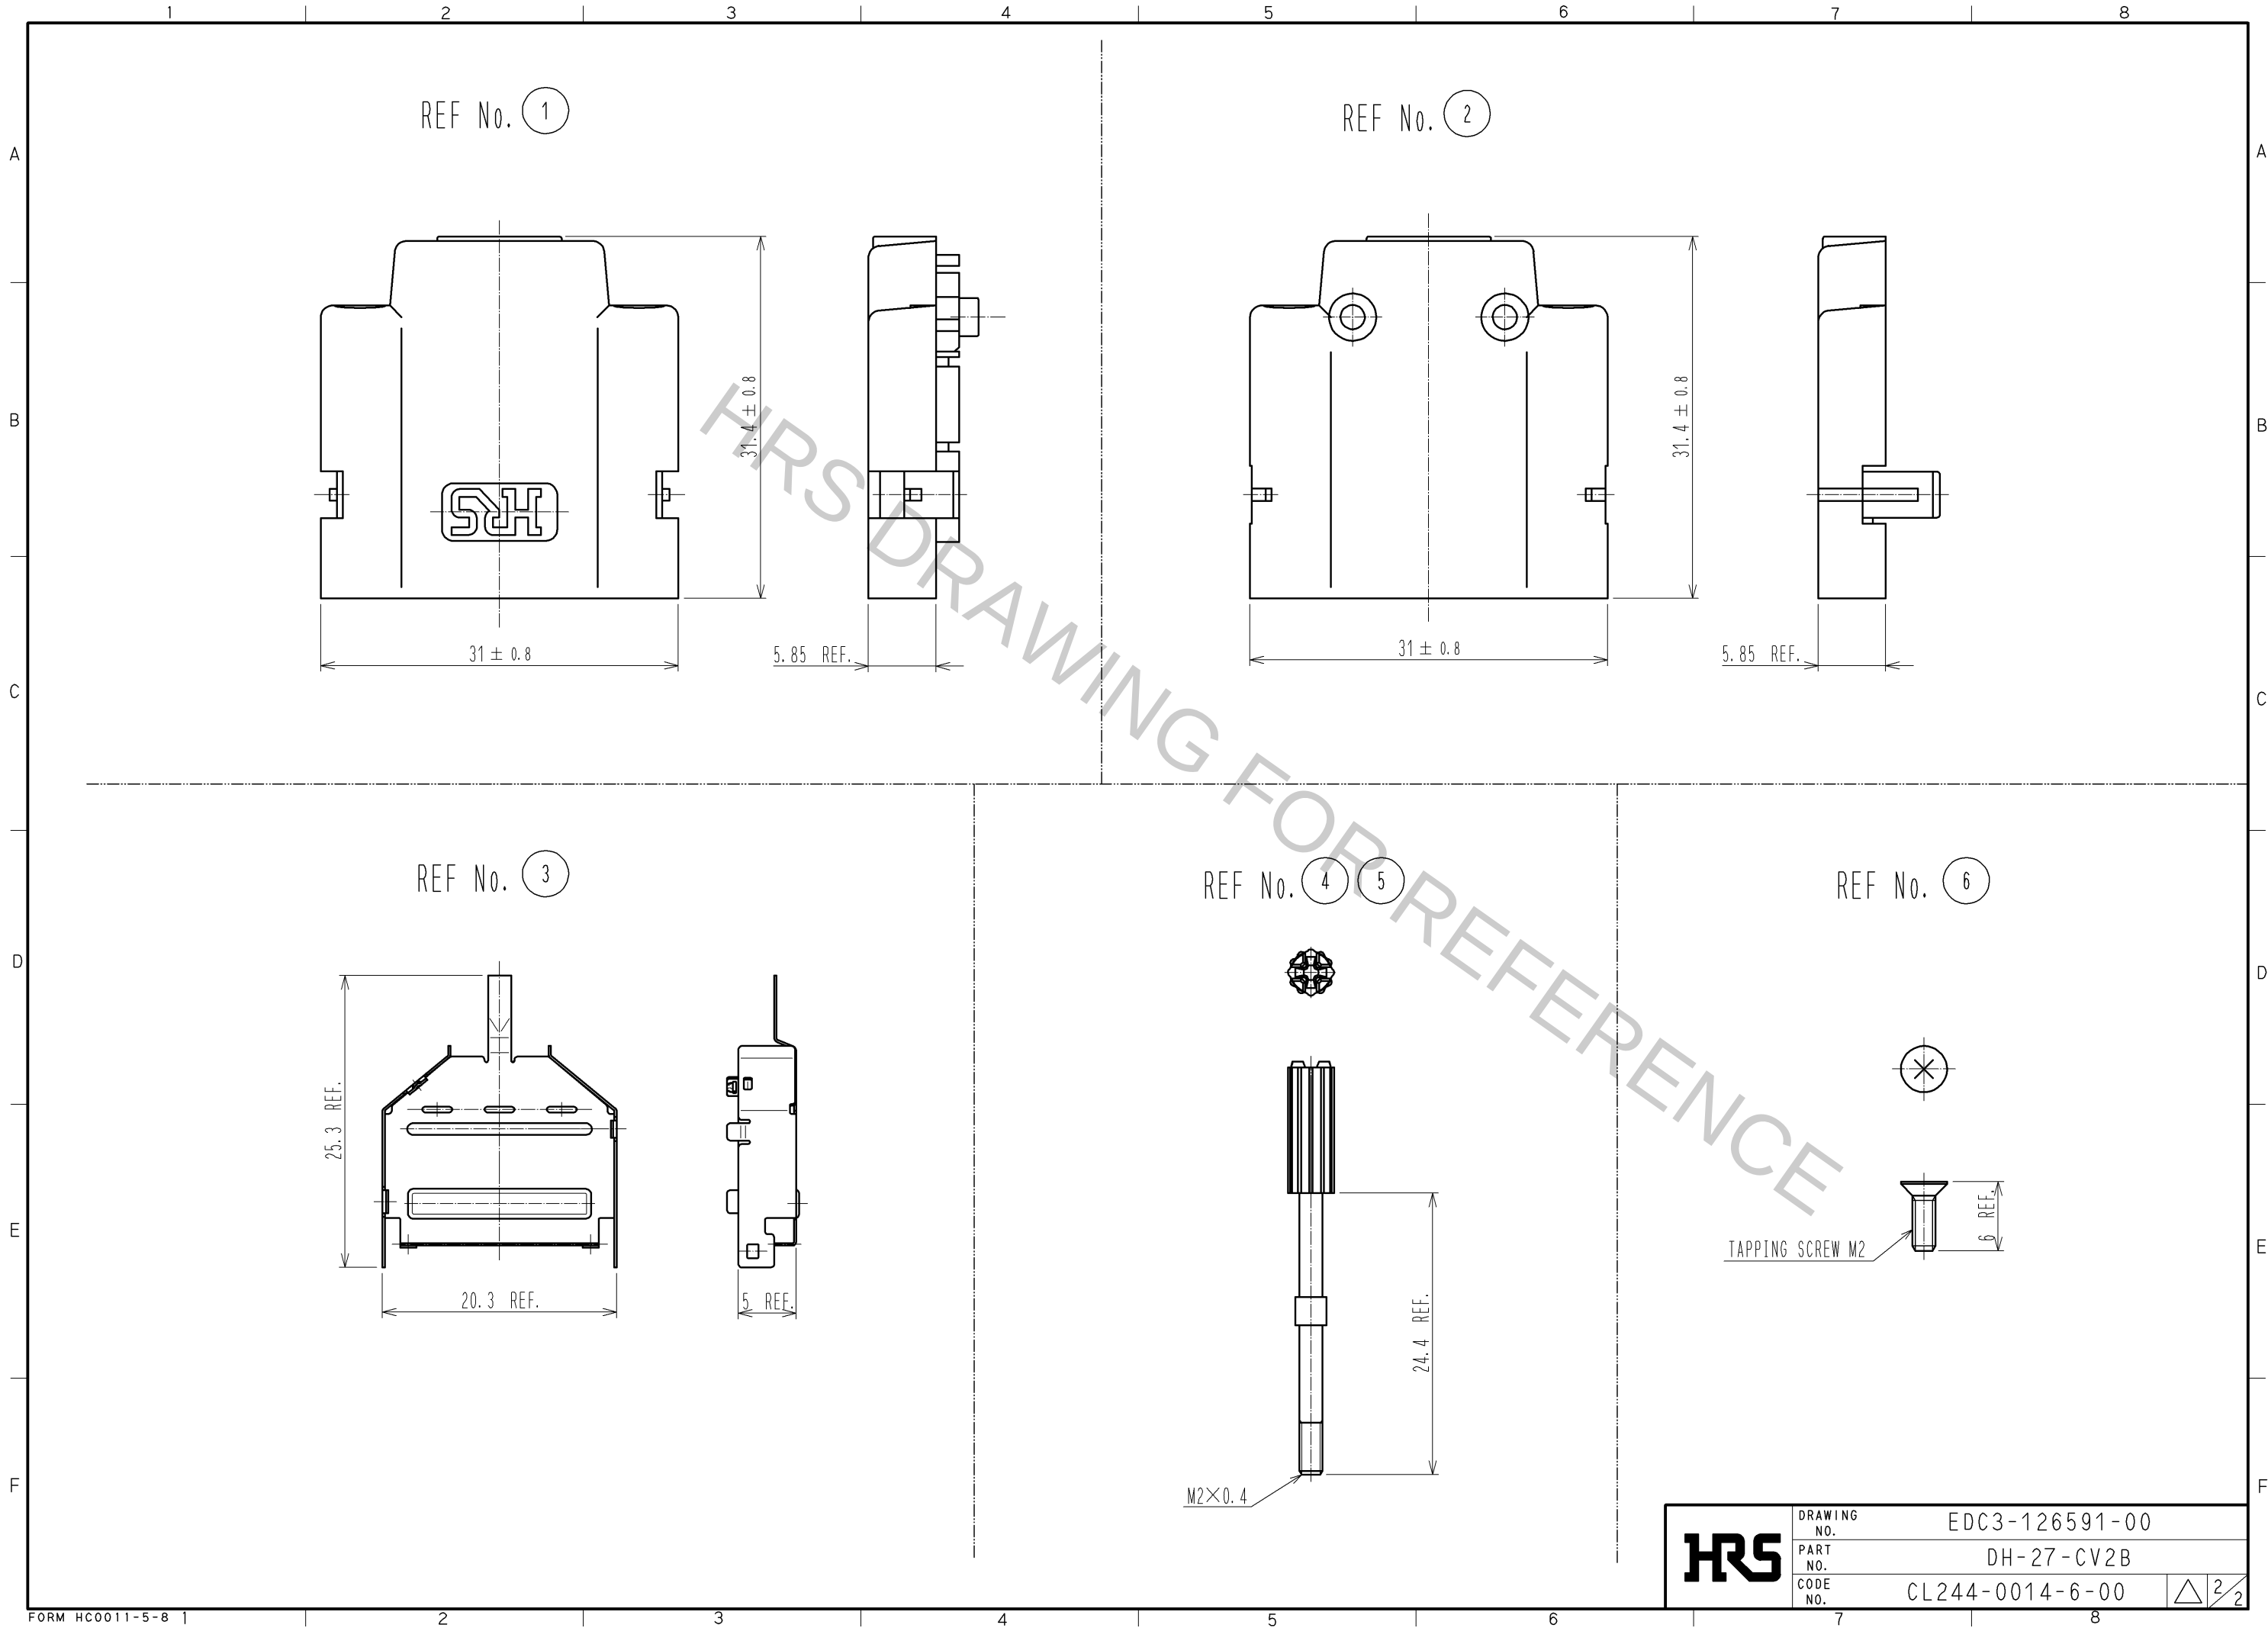

HRS	DRAWING NO.	EDC3-126591-00
	PART NO.	DH-27-CV2B
	CODE NO.	CL244-0014-6-00
	△ 2/2	