
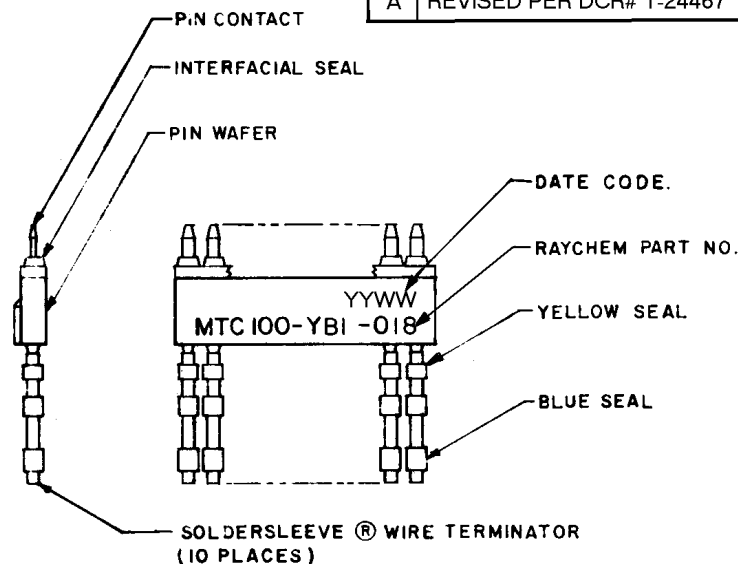


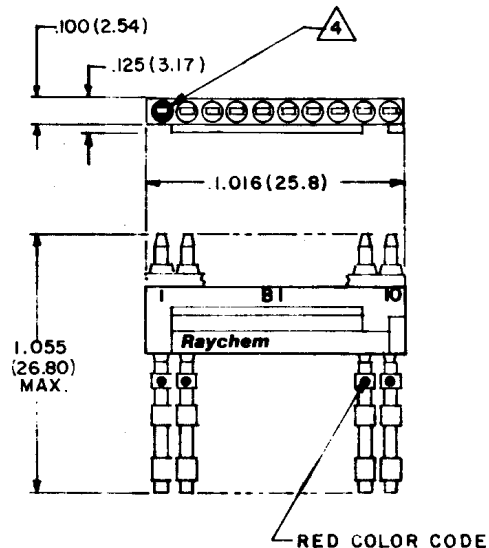

REVISIONS			
LTR	DESCRIPTION	DATE	APPROVED
2	REVISED PER ECN #T- 5868	1-3-86	JB
A	REVISED PER DCR# T-24467	3/23/2000	M.HIGGY

4. PIN NUMBER ONE IS MARKED IN A CONTRASTING COLOR.

3. THIS PRODUCT IS DESIGNED TO MEET THE REQUIREMENTS OF RAYCHEM SPECIFICATION D-6012. QUALIFICATION IS PENDING.

C. CONTACT TAIL; SOLDER COATED PER QQ-S-571.

B. PIN CONTACT ENGAGING AREA; GOLD PLATE PER MIL-G-45204, CLASS I.

2. FINISH : A. PIN WAFER; FINISH TO BE AS MOLDED.

D. INTERFACIAL SEAL; SILICONE ELASTOMER PER ZZ-R-765.

C. SOLDERSLLEEVE® WIRE TERMINATOR; REFER TO RAYCHEM DWG. CTA-0068 FOR DATA.

B. PIN CONTACT; COPPER ALLOY PER QQ-B-750

1. MATERIAL : A. PIN WAFER INSERT MATERIAL HIGH GRADE POLYARYLENE THERMOPLASTIC.

NOTES :

**If this document is printed it becomes uncontrolled.
Check with the web for latest revision.**

SPECIFICATION CONTROL DRAWING

DRAWN	R.Uchtmann.	10-11-84.	Raychem RAYCHEM CORPORATION 300 CONSTITUTION DRIVE MENLO PARK, CALIFORNIA 94025	
CHECKED				
APPROVED			TITLE WAFER "B1" PIN, SPECIAL 1" FOR USE IN MTC 100 2" CONNECTOR, 125°C OPERATING TEMPERATURE, FOR 20-26 AWG ROUND WIRE TERMINATION, OVAL ENTRY. MTC 100 SERIES (P.A.S.S.)	
APPROVED				
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES. METRIC DIMENSIONS ARE IN PARENTHESIS			SIZE B	CODE IDENT. NO. 06090
DO NOT SCALE THIS DRAWING			CAD FILE: T24467.TIF	DWG. NO. MTC 100-YBI - 018
			WEIGHT	SHEET 1 OF 1