



(2.00 mm) .0787"


ETMM-108-02-F-D-TH-LC

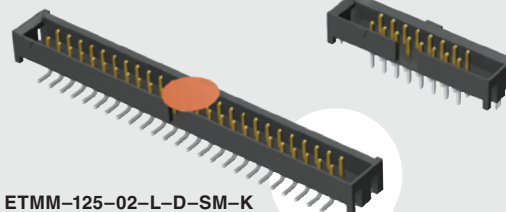

ETMM-112-02-F-D-RA



ETMM-125-02-L-D-SM-K



ETMM SERIES

SHROUDED STRAIN RELIEF IDC HEADER

SPECIFICATIONS

For complete specifications see www.samtec.com?ETMM

Insulator Material:

Black Liquid Crystal Polymer

Terminal Material:

Phosphor Bronze

Plating:

Sn or Au over

50 μ " (1.27 μ m) Ni

Operating Temp Range:

-55 °C to +125 °C

RoHS Compliant:

Yes

PROCESSING

Lead-Free Solderable:

Yes

SMT Lead Coplanarity:

(0.13 mm) .005" max*

*(.004" stencil solution

may be available; contact

IPG@samtec.com)

RECOGNITIONS

For complete scope of recognitions see www.samtec.com/quality



FILE NO. E111594

OTHER SOLUTIONS


- TCSD mates without Strain Relief. See STMM Series
- Shrouded header for mating with Connector Strips. See LTMM Series

ALSO AVAILABLE (MOQ Required)

- Other sizes

Mates with:
TCSD, TCMD



Shrouded pins
for protection

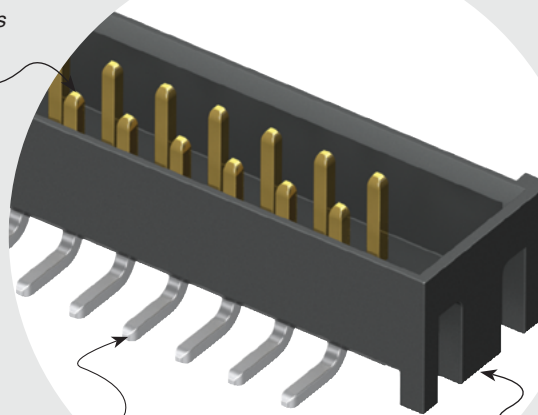

Surface Mount,
Through-hole and
Right-angle

Optional
Locking clips

TYPE STRIP	1	NO. OF POSITIONS	02	PLATING OPTION	D	TAIL OPTION	OTHER OPTION
ETMM = Mates with TCSD and TCMD with Strain Relief		05, 08, 10, 12, 13, 15, 17, 20, 22, 25 (Standard sizes)		-F = Gold Flash on post, Matte Tin on tail -L = 10 μ " (0.25 μ m) Gold on post, Matte Tin on tail		-TH = Through-hole -RA = Right-angle -SM = Surface Mount	-“XX” = Polarized Position -LC = Locking Clip (Not available for -RA) (Manual placement required) -TR = Tape & Reel Packaging (-SM only) -K = (7.50 mm) .295" DIA Polyimide Film Pick & Place Pad (-SM only)

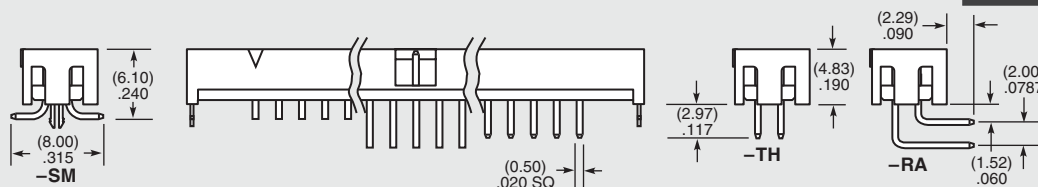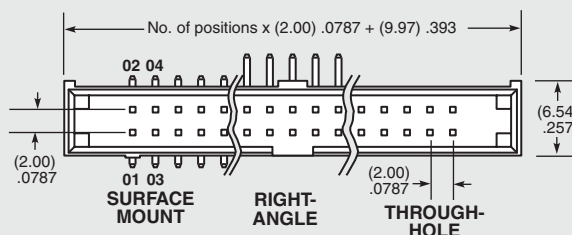

Note:
Some lengths, styles and options are non-standard, non-returnable.

Due to technical progress, all designs, specifications and components are subject to change without notice.

WWW.SAMTEC.COM

All parts within this catalog are built to Samtec's specifications.

Customer specific requirements must be approved by Samtec and identified in a Samtec customer-specific drawing to apply.