THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION MAY ,2006.
© COPYRIGHT 2006 BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

LOC	DIST
E	B

REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
	C	ECR-06-010127	17MAY06	JMS	FWK

NOTES:

1. PACK IN ACCORDANCE WITH AMP SPEC 107-3275
2. 100 TRAY PACK IN ACCORDANCE WITH AMP SPEC 107-3275
3. Au PLATING
4. Ni PLATING
5. ELECTRICAL CHARACTERISTICS
   - FREQUENCY RANGE: DC – 11 GHz
   - NOMINAL IMPEDANCE: 50 Ohm
   - INSULATION RESISTANCE: 5000 MOhm
   - WORKING VOLTAGE: 1000 Volts RMS at Sea Level
   - DIELECTRIC WITHSTAND VOLTAGE: 2500 Volts RMS Max
   - CONTACT RESISTANCE:
   - CENTRE CONTACT: 1.00 mOhm Max
   - OUTER CONTACT: 1.00 mOhm Max
   - VSWR @ xGHz: N/A
   - INSERTION LOSS xdb: N/A
6. MECHANICAL CHARATERISTICS
   - COUPLING RETENTION FORCE: 445N Min
   - DURABILITY: 500 Cycles Min
7. ENVIRONMENTAL CHARACTERISTICS
   - OPERATING TEMPERATURE: –65 to +165 DegC
8. FOR TECHNICAL DATA REFER TO YOUR LOCAL TYCO ELECTRONICS SALES OFFICE
9. ALL DIMENSIONS ARE NOMINAL FOR REFERENCE ONLY UNLESS OTHERWISE STATED

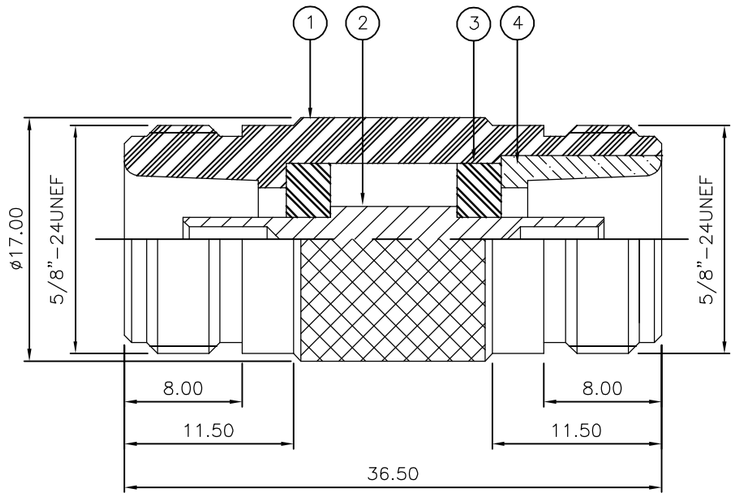

		1	1	BRASS 4	SLEEVE	4
		2	2	PTFE	INSULATION	3
		1	1	BRASS 3	CONTACT	2
		1	1	BRASS 4	BODY	1
		6--0	1--0	MATERIAL	DESCRIPTION	ITEM
		2	1			
QUANTITY PER ASSY				PARTS LIST		

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: mm

TOLERANCES UNLESS OTHERWISE SPECIFIED:
0 PLC ± –
1 PLC ± –
2 PLC ± –
3 PLC ± –
4 PLC ± –
ANGLES ± –

MATERIAL: SEE TABLE

FINISH: –

DWN J.SANDWELL 17MAY06
CHK S.PARLOW 17MAY06
APVD F.WHEELER-KING 17MAY06
PRODUCT SPEC –
APPLICATION SPEC –
WEIGHT –

CUSTOMER DRAWING

tyco Electronics
Tyco Electronics Corporation
Bideford EX39 4HE

NAME: TYPE 'N' STRAIGHT ADAPTOR J-J 50 OHM
–
–

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A3	00779	C-1337624	–

SCALE	SHEET	REV
NTS	1 OF 1	C