

Features

Regulated Converters

- 30mW max of No Load Power Consumption
- High efficiency up to 80%
- Isolated Output 3kVAC / 1 min
- Short Circuit Protection
- Overvoltage Protection
- Meets EN55022 and FCC Class B
- Built-In Fusible Resistor

Selection Guide

Part Number	Output Voltage (VDC)	Max. Current (Io, max)	Total Regulation (%)	Ripple & Noise (mV)	Efficiency (Typ.)	Max. Capacitive Load ⁽¹⁺²⁾
RAC03-3.3SC/277	3.3	900mA	±6%	200mV	71%	47000µF
RAC03-05SC/277	5	600mA	±6%	150mV	76%	15000µF
RAC03-12SC/277	12	350mA	±6%	150mV	78%	2200µF
RAC03-24SC/277	24	125mA	±6%	150mV	80%	390µF

Specifications (measured at TA 25°C, full load after warm-up)

Input Voltage Range (with Derating)	80-305VAC or 110-430VDC	
Input Frequency	47-440Hz	
Input Current (full Load)	115VAC/230VAC	70mA / 45mA typ.
Inrush Current	115VAC/230VAC	15A/30A max.
No Load Power Consumption	80-305VAC / 47-440Hz	30mW max.
Output Voltage (Vout nom.)	3.3V-24V	
Output Voltage Tolerance	±6% max.	
Minimum Load	2%	
Line Voltage Regulation	LL-HL at full Load	±1% typ. / ±1.5% max.
Load Voltage Regulation	2-100% Load	see Selection Guide
Hold-up Time	115VAC	15ms typ.
	230VAC	80ms typ.
Overcurrent Limit	116% - 156%	
Switching Frequency	at full Load	45kHz typ.
Isolation Voltage	Input-Output	3kVAC / 1 minute
Leakage Current	80-305VAC / 47-440Hz	10uA max.
Isolation Resistance	1G Ω min	
Short Circuit Protection	Continuous, Auto Restart	
Over-Voltage Protection	Zener clamp, set at 4.4V-5.0V for 3.3V and others	
	112-140% of its nominal output voltage	
Over Voltage Category	OVC II	
Operating Temperature ⁽⁵⁾	natural convection, without derating	-25°C to +75°C
	natural air convection, with derating	-25°C to +85°C
Storage Temperature	-40°C to +85°C	
Case Material	UL94V-0 black plastic	
Potting Material	Silicon	
Relative Humidity	95% RH max.	
Package Weight	28g	
Package Quantity	12 pcs	
MTBF	TA = 25°C	> 1000x10 ³ hours
	TA = 75°C	> 100x10 ³ hours
Physical	Dimension (LxWxH)	38.25 x 24.35 x 17.40 mm
EMI	EN55022, Class B	
Noise Immunity	Report: T120816N04-E	EN55024
Safety Standard		
EC/EN General Safety	Report: SPCLVD1208051	IEC/EN-60950-1
UL General Safety	Report: E224736-A17-UL	UL-60950-1

continued on next page

POWERLINE

AC/DC-Converter

with 3 year Warranty

RECOM


3 Watt Single Output



EN-60950-1 Certified
UL-60950-1 Certified

RAC03-SC/277

Derating-Graph (Ambient Temperature)

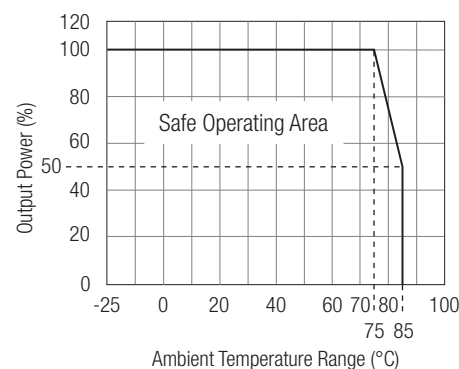

Refer to Application Notes

Specifications (measured at TA 25°C, full load after warm-up)

Notes:

Note1: Measured @ 230VAC / 50Hz / Ta=25°C with constant resistant mode at full load.


Note2: If used @ 115VAC / 60Hz with full load, max. capacitive load is less, please contact RECOM for detailed information.

Note3: „Total Regulation“ is the output voltage tolerance which includes initial voltage precise, thermal drift, line regulation and load regulation at rated input voltage and load condition.


Note4: „Ripple & Noise“ is maximum peak-to-peak voltage value measured at output within 20MHz bandwidth at rated line voltage and output load ranges, and with a 47 µF low-ESR electrolytic capacitor in parallel with a 0.1 µF ceramic capacitor across the output.

Note5: Start up only is guaranteed at temperatures down to -25°C. Other specifications may not be met.





Output V-I Characteristic

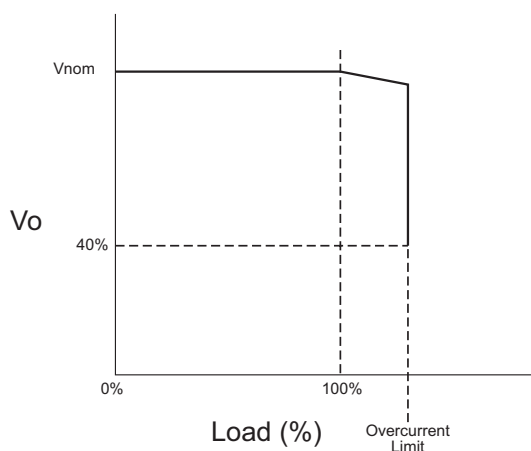

Input Voltage Derating Graph

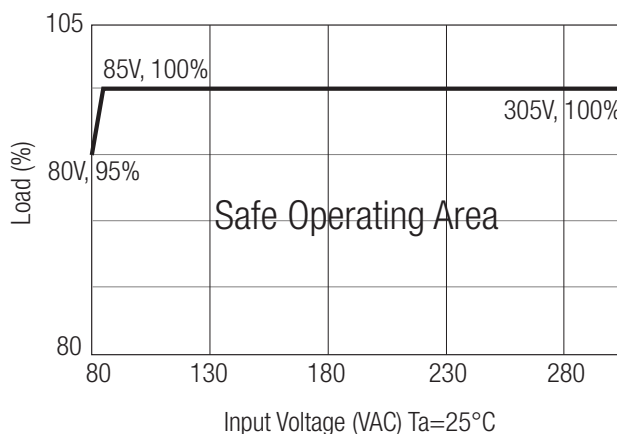

Package Style and Pinning

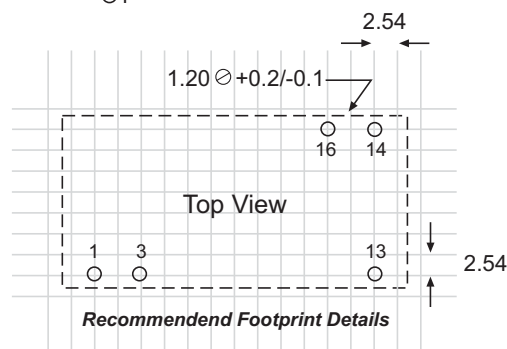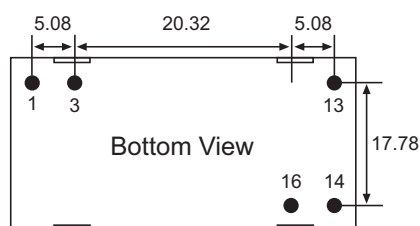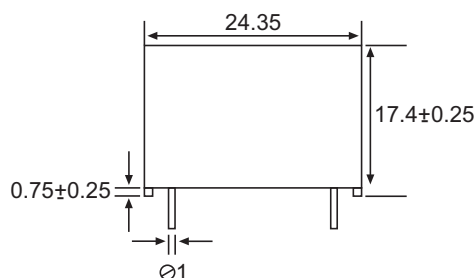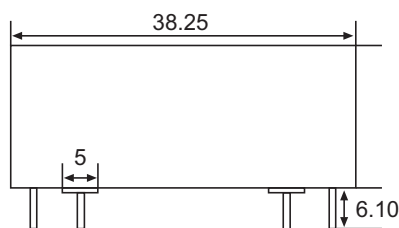

Pin Connections

Pin #	Single Out
1	VAC in (L)
3	VAC in (N)
13	NC
14	-VDC out
16	+VDC out

Tolerance ±0.5mm unless otherwise specified

Recommend Footprint Details