

ON Semiconductor

Is Now



To learn more about onsemi™, please visit our website at
www.onsemi.com

onsemi and onsemi. and other names, marks, and brands are registered and/or common law trademarks of Semiconductor Components Industries, LLC dba "onsemi" or its affiliates and/or subsidiaries in the United States and/or other countries. onsemi owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of onsemi product/patent coverage may be accessed at www.onsemi.com/site/pdf/Patent-Marking.pdf. onsemi reserves the right to make changes at any time to any products or information herein, without notice. The information herein is provided "as-is" and onsemi makes no warranty, representation or guarantee regarding the accuracy of the information, product features, availability, functionality, or suitability of its products for any particular purpose, nor does onsemi assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using onsemi products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by onsemi. "Typical" parameters which may be provided in onsemi data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. onsemi does not convey any license under any of its intellectual property rights nor the rights of others. onsemi products are not designed, intended, or authorized for use as a critical component in life support systems or any FDA Class 3 medical devices or medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase or use onsemi products for any such unintended or unauthorized application, Buyer shall indemnify and hold onsemi and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that onsemi was negligent regarding the design or manufacture of the part. onsemi is an Equal Opportunity/Affirmative Action Employer. This literature is subject to all applicable copyright laws and is not for resale in any manner. Other names and brands may be claimed as the property of others.



LCD and Camera EMI Filter Array with ESD Protection

CM1452

Features

- Four, six and eight channels of EMI filtering with integrated ESD protection
- $\pm 15\text{kV}$ ESD protection on each channel (IEC 61000-4-2 Level 4, contact discharge)
- $\pm 30\text{kV}$ ESD protection on each channel (HBM)
- Greater than 30dB attenuation (typical) at 1 GHz
- Chip Scale Package (CSP) with 0.40mm pitch and 0.25mm CSP solder ball which features extremely low parasitic inductance for optimum filter and ESD performance
- *OptiGuard*[™] Coating for improved reliability at assembly
- RoHS-compliant, lead-free finishing

Applications


- LCD and Camera data lines in mobile handsets
- I/O port protection for mobile handsets, notebook computers, PDAs etc.
- EMI filtering for data ports in cell phones, PDAs or notebook computers.
- Wireless handsets
- Handheld PCs/PDAs
- LCD and camera modules

Product Description

The CM1452 family of pi-style EMI filter arrays with ESD protection, integrates four, six and eight filters (C-L-C) in CSP form factor with 0.40mm pitch. Each EMI filter channel of the CM1452 is implemented as a 3-pole L-C filter where the component values are 20pF-17nH-20pF. The CM1452 roll-off frequency at -6dB attenuation is 330MHz and can be used in applications where the data rates are as high as 132Mbps and provide greater than 30dB over the 800MHz to 2.7GHz frequency range. The ESD diodes on every I/O pin provide a very high level of ESD protection for sensitive electronic components. The ESD protection diodes connected to the filter ports are designed and characterized to safely dissipate ESD strikes of $\pm 15\text{kV}$, beyond the maximum requirement of the IEC61000-4-2 international standard. Using the MIL-STD-883 (Method 3015) specification for Human Body Model (HBM) ESD, the pins are protected for contact discharges at greater than $\pm 30\text{kV}$.

The CM1452 incorporates *OptiGuard*[™] which results in improved reliability at assembly. The CM1452 is manufactured with a 0.40mm pitch and 0.25mm CSP solder ball to provide up to 28% board space savings vs. competing CSP devices with 0.50mm pitch and 0.30mm CSP solder ball.


Electrical Schematic

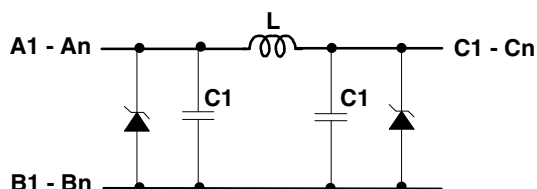

CM1452 schematic diagram of 3-pole L-C filter array with ESD.


PACKAGE / PINOUT DIAGRAMS

TOP VIEW
(Bumps Down View)




CM1452-04CP
10-bump CSP

BOTTOM VIEW
(Bumps Up View)



TOP VIEW
(Bumps Down View)

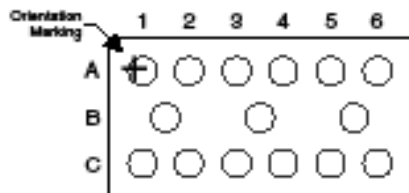


CM1452-06CP
15-bump CSP

BOTTOM VIEW
(Bumps Up View)



TOP VIEW
(Bumps Down View)

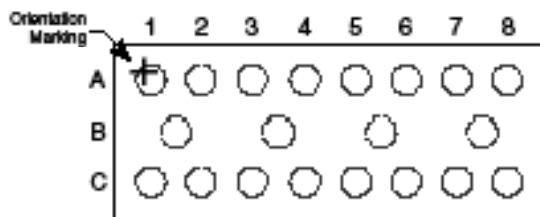

CM1452-08CP
20-bump CSP

BOTTOM VIEW
(Bumps Up View)



Notes:

- 1) These drawings are not to scale.

CM1452

Pin Descriptions

PIN DESCRIPTIONS							
PIN NUMBER			PIN DESCRIPTION	PIN NUMBER			PIN DESCRIPTION
-04	-06	-08		-04	-06	-08	
A1	A1	A1	Filter #1	C1	C1	C1	Filter #1
A2	A2	A2	Filter #2	C2	C2	C2	Filter #2
A3	A3	A3	Filter #3	C3	C3	C3	Filter #3
A4	A4	A4	Filter #4	C4	C4	C4	Filter #4
	A5	A5	Filter #5		C5	C5	Filter #5
	A6	A6	Filter #6		C6	C6	Filter #6
		A7	Filter #7			C7	Filter #7
		A8	Filter #8			C8	Filter #8
B1	B1	B1	GND				
B2	B2	B2	GND				
	B3	B3	GND				
		B4	GND				

Ordering Information

PART NUMBERING INFORMATION				
# of Channels	Leads	Package	Lead-free Finish	
			Ordering Part Number ¹	Part Marking
4	10	CSP	CM1452-04CP	52
6	15	CSP	CM1452-06CP	L526
8	20	CSP	CM1452-08CP	L528

Note 1: Parts are shipped in Tape and Reel form unless otherwise specified.

Specifications

ABSOLUTE MAXIMUM RATINGS

PARAMETER	RATING	UNITS
Operating Temperature Range	−40 to +85	°C
Storage Temperature Range	−65 to +150	°C

STANDARD OPERATING CONDITIONS

PARAMETER	RATING	UNITS
Operating Temperature Range	−40 to +85	°C

ELECTRICAL OPERATING CHARACTERISTICS (SEE NOTE 1)

SYMBOL	PARAMETER	CONDITIONS	MIN	TYP	MAX	UNITS
L_{CHAN}	Channel Inductance			17		nH
C_{TOT}	Total Channel Capacitance at 2.5Vdc; 1MHz, 30mVac	2.5V dc; 1MHz, 30mV ac	24	30	36	pF
C_1	Capacitance C1 at 2.5V dc; 1MHz, 30mV ac	2.5V dc; 1MHz, 30mV ac		15		pF
f_c	Cut-off Frequency, ZSOURCE = 50 Ω , ZLOAD = 50 Ω			148		MHz
f_R	Roll-off Frequency at -6dB Attenuation, ZSOURCE = 50 Ω , ZLOAD = 50 Ω			330		MHz
V_{ST}	Stand-off Voltage, I = 10mA		5.5			V
I_{LEAK}	Diode Leakage at 3.3V reverse bias voltage			0.1	1.0	μ A
V_{SIG}	Signal Clamp Voltage: Positive Clamp Negative Clamp	$I_{\text{LOAD}} = 10\text{mA}$ $I_{\text{LOAD}} = -10\text{mA}$	5.6 -1.5	6.8 -0.8	9.0 -0.4	V V
V_{ESD}	In-system ESD withstand voltage*: a) Human Body Model, MIL-STD-883, Method 3015 b) Contact Discharge per IEC 61000-4-2 Level 4	Notes 2 and 3	± 30 ± 15			kV kV
R_{DYN}	Dynamic Resistance Channel Positive Transients Channel Negative Transients			2.3 0.9		Ω Ω
A_L	Current per Inductor:				30	mA
DC	DC Package Power Rating:				30	W

Note 1: All parameters specified at $T_A = -40^\circ\text{C}$ to $+85^\circ\text{C}$ unless otherwise noted.

Note 2: ESD applied to input/output pins with respect to GND, one at a time. Clamping voltage is measured at the opposite side of the EMI filter to the ESD pin (i.e. if ESD is applied to pin A1 then clamping voltage is measured at pin C1).

Note 3: Unused pins are left open.

Performance Information

Typical Filter Performance (nominal conditions unless specified otherwise, 50 Ω environment)

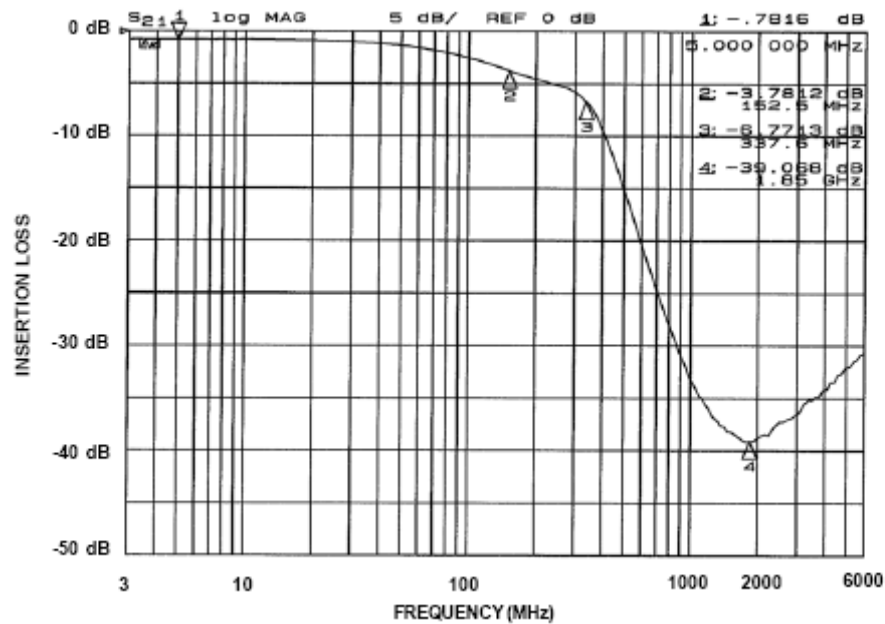


Figure 1. Insertional Loss vs. Frequency (Filter 1: CM1452-04, -06, -08)

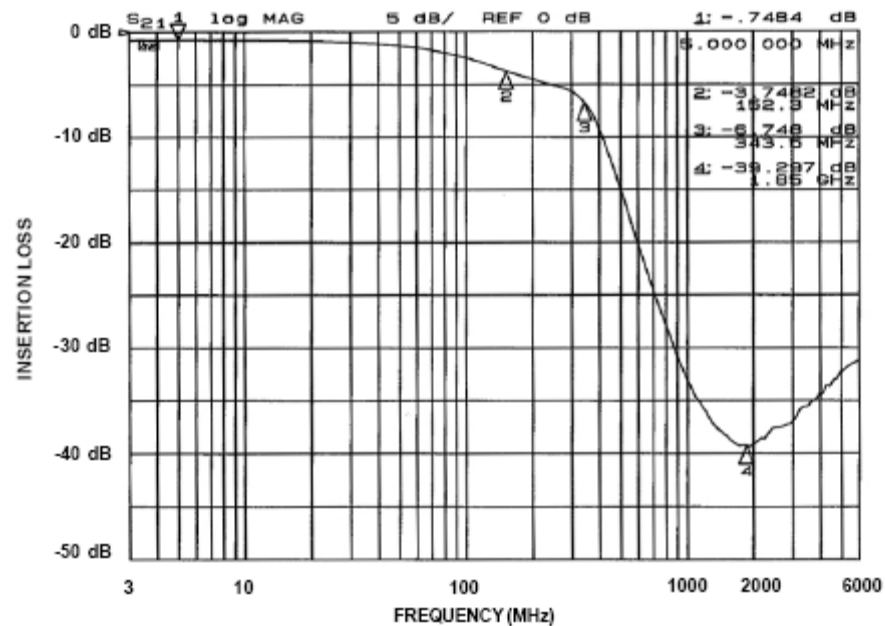


Figure 2. Insertional Loss vs. Frequency (Filter 2: CM1452-04, -06, -08)

Performance Information (Con'td)

Typical Filter Performance (nominal conditions unless specified otherwise, 50 Ω environment)

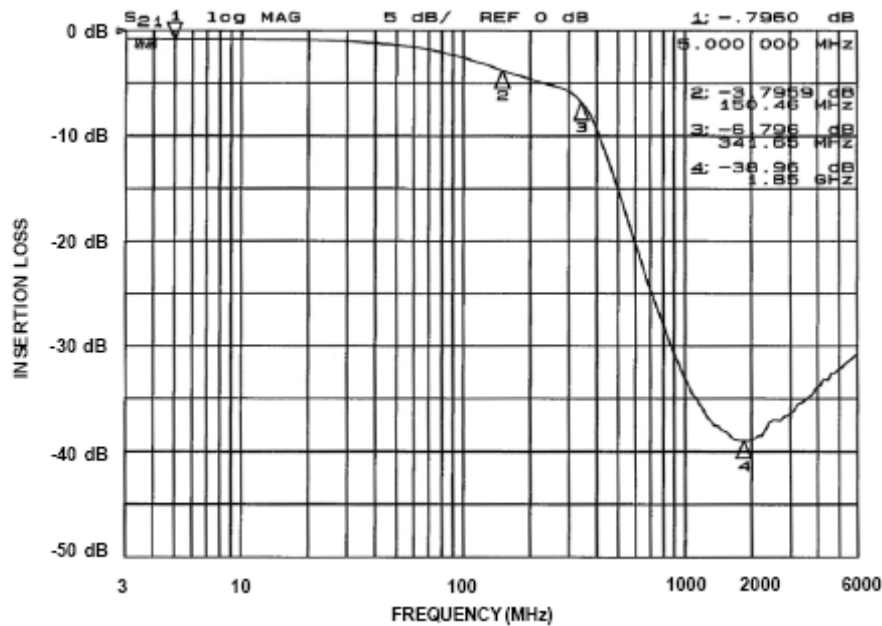


Figure 3. Insertional Loss vs. Frequency (Filter 3: CM1452-04, -06, -08)

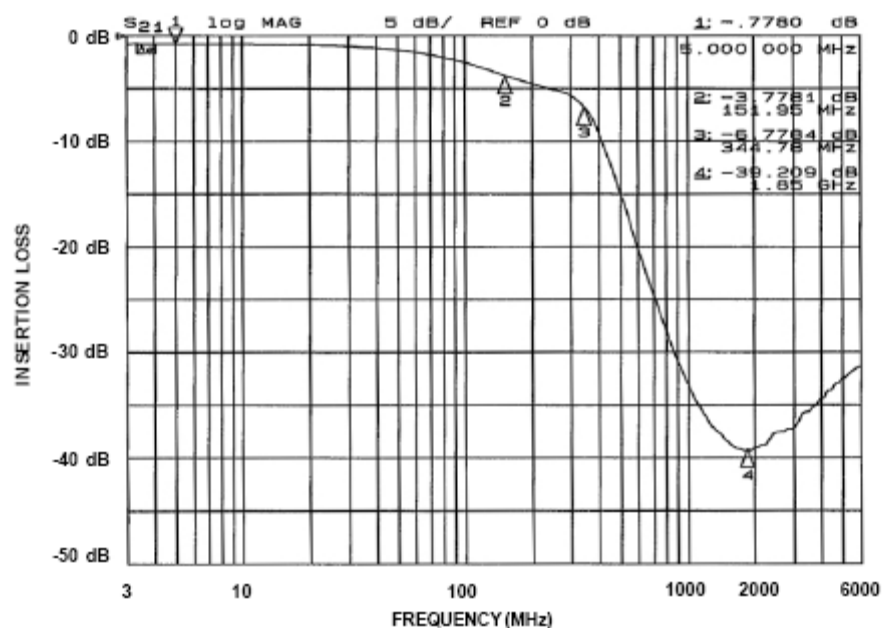


Figure 4. Insertional Loss vs. Frequency (Filter 4: CM1452-04, -06, -08)

Performance Information (Con'td)

Typical Filter Performance (nominal conditions unless specified otherwise, 50 Ω environment)

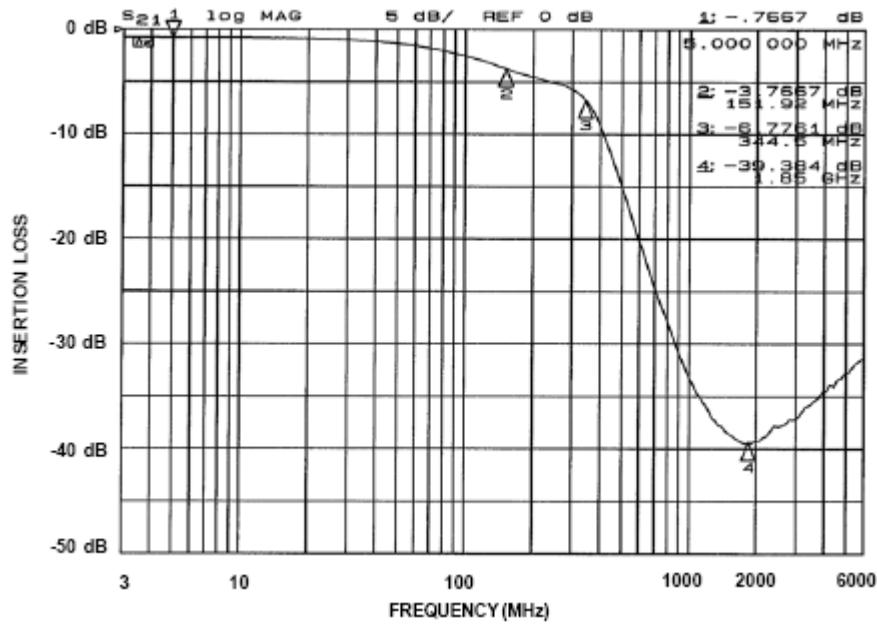


Figure 5. Insertional Loss vs. Frequency (Filter 5: CM1452-06, -08)

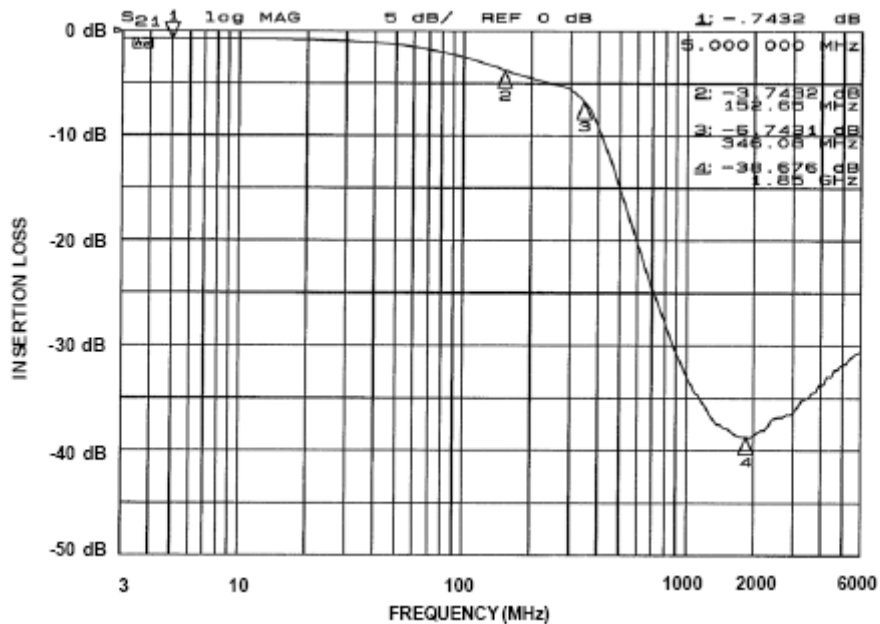


Figure 6. Insertional Loss vs. Frequency (Filter 6: CM1452-06, -08)

Performance Information (Con'td)

Typical Filter Performance (nominal conditions unless specified otherwise, 50 Ω environment)

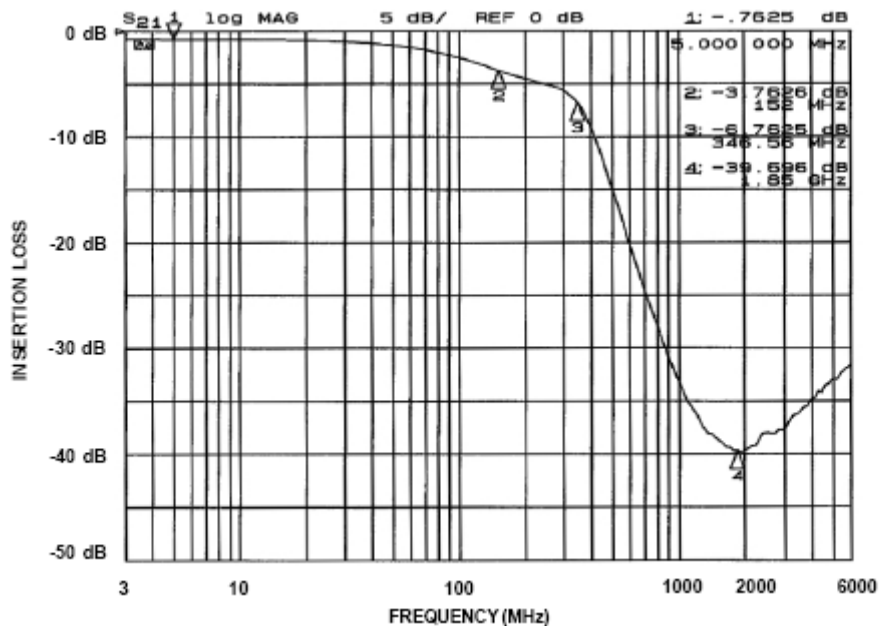


Figure 7. Insertional Loss vs. Frequency (Filter 7: CM1452-08)

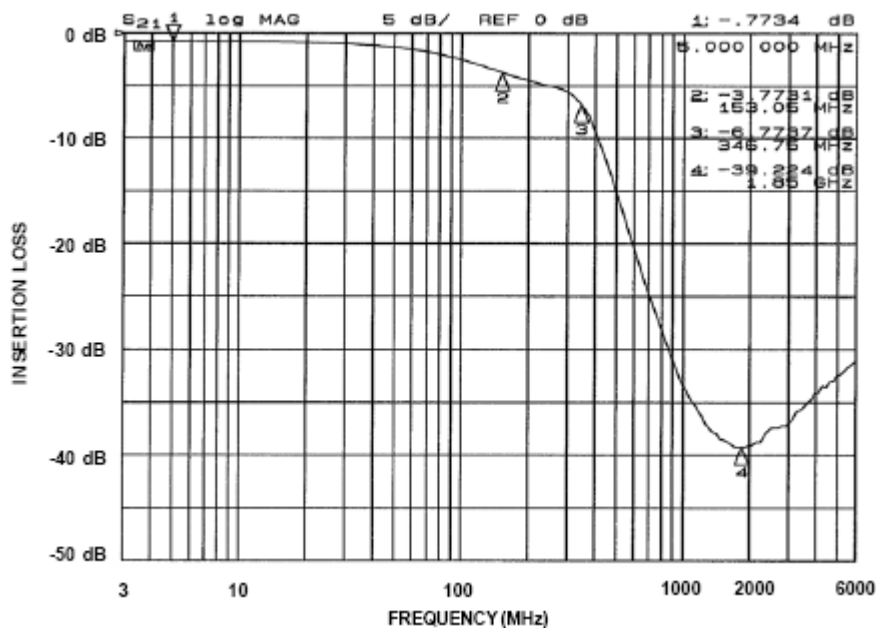


Figure 8. Insertional Loss vs. Frequency (Filter 8: CM1452-08)

Performance Information (Con'td)

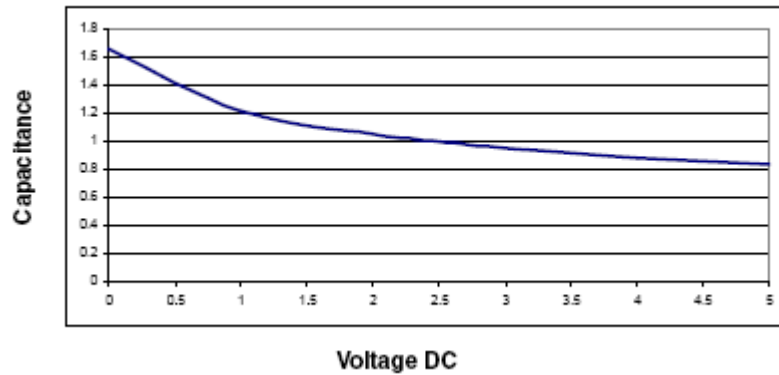


Figure 9. CM1452 Typical Diode Capacitance vs. Input Voltage
(Normalized to 2.5Vdc)

Application Information


Refer to Application Note AP-217, "The Chip Scale Package", for a detailed description of Chip Scale Packages offered by California Micro Devices. See <http://www.wlcsforum.org/documents/pdf/ap-217.pdf> for download.

CM1452

Mechanical Specifications

CM1452-04CP devices are packaged in custom Chip Scale Packages (CSP).


PACKAGE DIMENSIONS						
Package		Custom CSP				
Bumps		10				
Dim	Millimeters			Inches		
	Min	Nom	Max	Min	Nom	Max
A1	1.627	1.672	1.717	0.0641	0.0658	0.0676
A2	1.068	1.113	1.158	0.0420	0.0438	0.0456
B1	0.395	0.400	0.405	0.0156	0.0157	0.0159
B2	0.195	0.200	0.205	0.0077	0.0079	0.0081
B3	0.342	0.347	0.352	0.0135	0.0137	0.0139
B4	0.342	0.347	0.352	0.0135	0.0137	0.0139
C1	0.186	0.236	0.286	0.0073	0.0093	0.0113
C2	0.160	0.210	0.260	0.0063	0.0082	0.0102
D1	0.545	0.615	0.685	0.0215	0.0242	0.0270
D2	0.378	0.419	0.460	0.0149	0.0165	0.0181
# per tape and reel		3500 pieces				
Controlling dimension: millimeters						

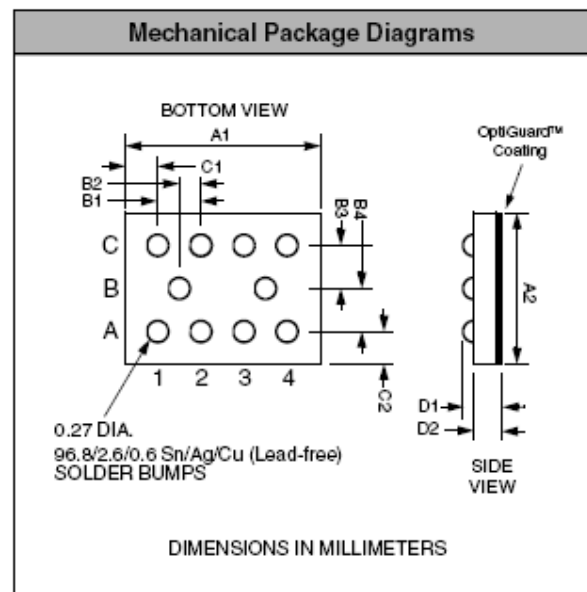

**Package Dimensions for
CM1452-04CP Chip Scale Package**

CSP Tape and Reel Specifications

PART NUMBER	CHIP SIZE (mm)	POCKET SIZE (mm) $B_0 \times A_0 \times K_0$	TAPE WIDTH W	REEL DIAMETER	QTY PER REEL	P_0	P_1
CM1452-04CP	1.67 X 1.11 X 0.615	1.73 X 1.23 X 0.83	8mm	178mm (7")	3500	4mm	4mm

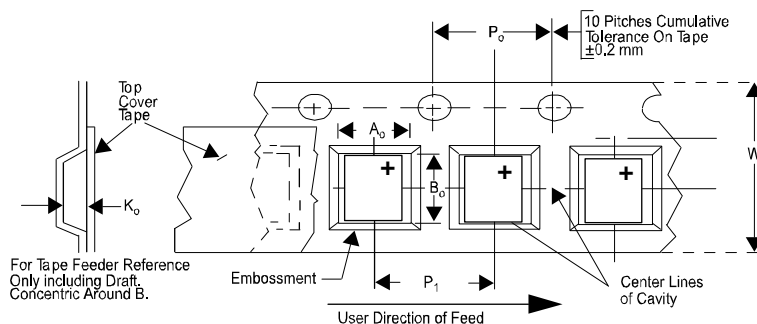


CM1452

Mechanical Specifications

CM1452-06CP devices are packaged in custom Chip Scale Packages (CSP).


PACKAGE DIMENSIONS						
Package		Custom CSP				
Bumps		15				
Dim	Millimeters			Inches		
	Min	Nom	Max	Min	Nom	Max
A1	2.427	2.472	2.517	0.0956	0.0973	0.0991
A2	1.068	1.113	1.158	0.0420	0.0438	0.0456
B1	0.395	0.400	0.405	0.0156	0.0157	0.0159
B2	0.195	0.200	0.205	0.0077	0.0079	0.0081
B3	0.342	0.347	0.352	0.0135	0.0137	0.0139
B4	0.342	0.347	0.352	0.0135	0.0137	0.0139
C1	0.186	0.236	0.286	0.0073	0.0093	0.0113
C2	0.160	0.210	0.260	0.0063	0.0082	0.0102
D1	0.545	0.615	0.685	0.0215	0.0242	0.0270
D2	0.368	0.419	0.470	0.0145	0.0165	0.0185
# per tape and reel		3500 pieces				
Controlling dimension: millimeters						

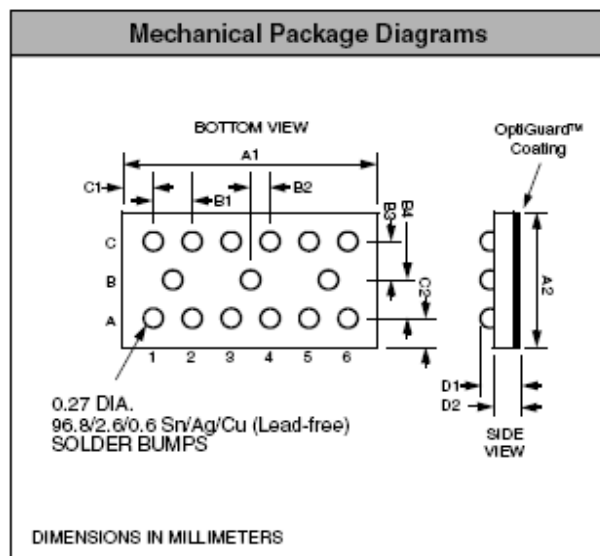

**Package Dimensions for
CM1452-06CP Chip Scale Package**

CSP Tape and Reel Specifications


PART NUMBER	CHIP SIZE (mm)	POCKET SIZE (mm) $B_0 \times A_0 \times K_0$	TAPE WIDTH W	REEL DIAMETER	QTY PER REEL	P_0	P_1
CM1452-06	2.47 X 1.11 X 0.615	2.59 X 1.27 X 0.73	8mm	178mm (7")	3500	4mm	4mm

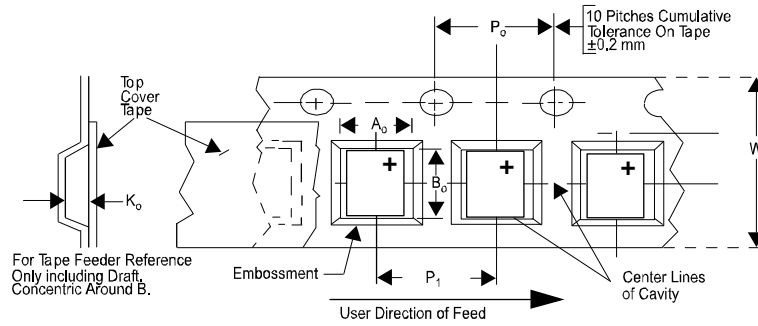

Mechanical Specifications

CM1452-08CP devices are packaged in custom Chip Scale Packages (CSP).


PACKAGE DIMENSIONS						
Package		Custom CSP				
Bumps		20				
Dim	Millimeters			Inches		
	Min	Nom	Max	Min	Nom	Max
A1	3.227	3.272	3.317	0.1270	0.1288	0.1306
A2	1.068	1.113	1.158	0.0420	0.0438	0.0456
B1	0.395	0.400	0.405	0.0156	0.0157	0.0159
B2	0.195	0.200	0.205	0.0077	0.0079	0.0081
B3	0.342	0.347	0.352	0.0135	0.0137	0.0139
B4	0.342	0.347	0.352	0.0135	0.0137	0.0139
C1	0.186	0.236	0.286	0.0073	0.0093	0.0113
C2	0.160	0.210	0.260	0.0063	0.0082	0.0102
D1	0.545	0.615	0.685	0.0215	0.0242	0.0270
D2	0.368	0.419	0.470	0.0145	0.0165	0.0185
# per tape and reel		3500 pieces				
Controlling dimension: millimeters						

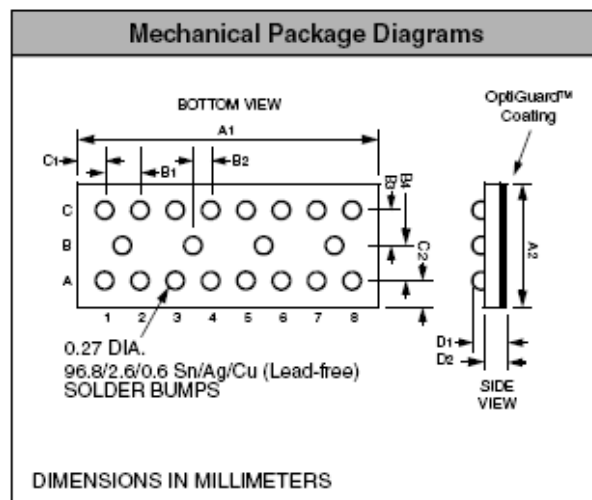

**Package Dimensions for
CM1452-08CP Chip Scale Package**

CSP Tape and Reel Specifications

PART NUMBER	CHIP SIZE (mm)	POCKET SIZE (mm) $B_0 \times A_0 \times K_0$	TAPE WIDTH W	REEL DIAMETER	QTY PER REEL	P_0	P_1
CM1452-08CP	3.27 X 1.11 X 0.615	3.40 X 1.19 X 0.74	12mm	330mm (13")	3500	4mm	4mm

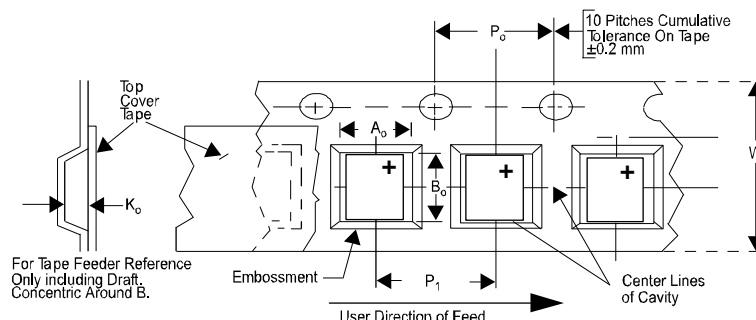

ON Semiconductor and  are registered trademarks of Semiconductor Components Industries, LLC (SCILLC). SCILLC reserves the right to make changes without further notice to any products herein. SCILLC makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does SCILLC assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. "Typical" parameters which may be provided in SCILLC data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. SCILLC does not convey any license under its patent rights nor the rights of others. SCILLC products are not designed, intended, or authorized for use as components in systems intended for surgical implant into the body, or other applications intended to support or sustain life, or for any other application in which the failure of the SCILLC product could create a situation where personal injury or death may occur. Should Buyer purchase or use SCILLC products for any such unintended or unauthorized application, Buyer shall indemnify and hold SCILLC and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that SCILLC was negligent regarding the design or manufacture of the part. SCILLC is an Equal Opportunity/Affirmative Action Employer. This literature is subject to all applicable copyright laws and is not for resale in any manner.

PUBLICATION ORDERING INFORMATION

LITERATURE FULFILLMENT:

Literature Distribution Center for ON Semiconductor
P.O. Box 5163, Denver, Colorado 80217 USA
Phone: 303-675-2175 or 800-344-3860 Toll Free USA/Canada
Fax: 303-675-2176 or 800-344-3867 Toll Free USA/Canada
Email: orderlit@onsemi.com

N. American Technical Support: 800-282-9855
Toll Free USA/Canada
Europe, Middle East and Africa Technical Support:
Phone: 421 33 790 2910
Japan Customer Focus Center
Phone: 81-3-5773-3850

ON Semiconductor Website: www.onsemi.com

Order Literature: <http://www.onsemi.com/orderlit>

For additional information, please contact your local Sales Representative