

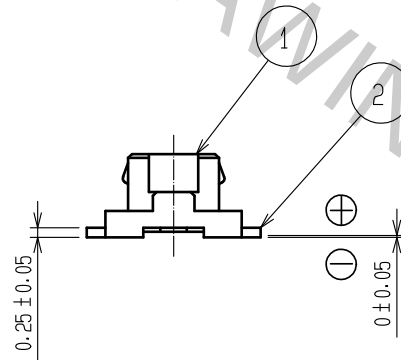
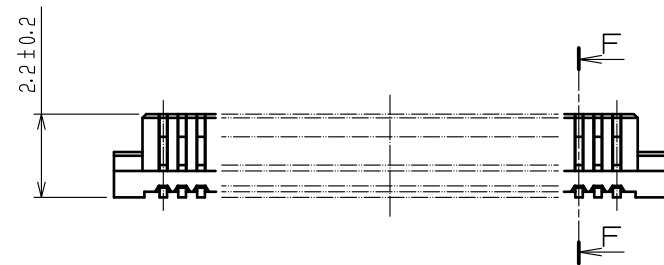
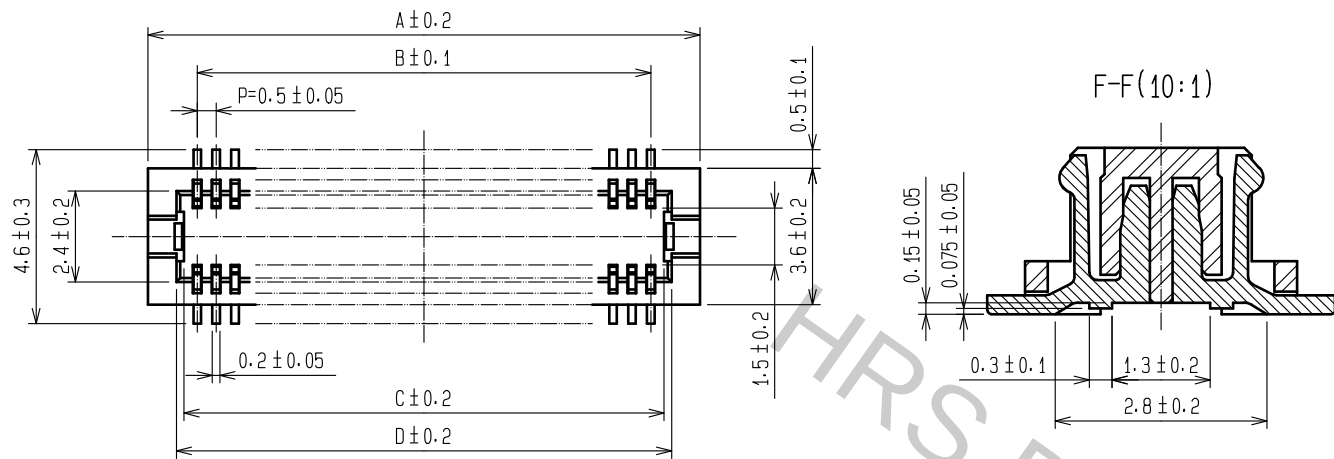


△	CODE No.	CONTACT	A	B	C	D	E
	CL537-0686-0-81	10	4.6	2.0	2.7	3.1	2.8
	CL537-0917-1-81	14	5.6	3.0	3.7	4.1	3.8
	CL537-0688-6-81	20	7.1	4.5	5.2	5.6	5.3
	CL537-0690-8-81	30	9.6	7.0	7.7	8.1	7.8
	CL537-0697-7-81	32	10.1	7.5	8.2	8.6	8.3
	CL537-0691-0-81	36	11.1	8.5	9.2	9.6	9.3
	CL537-0692-3-81	40	12.1	9.5	10.2	10.6	10.3
	CL537-0694-9-81	50	14.6	12.0	12.7	13.1	12.8
	CL537-0696-4-81	60	17.1	14.5	15.2	15.6	15.3

RECOMMENDED METAL MASK (10:1)

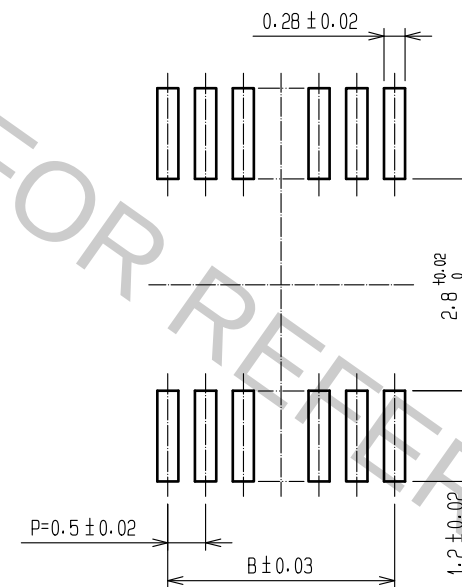

RECOMMENDED PATTERN(10:1)

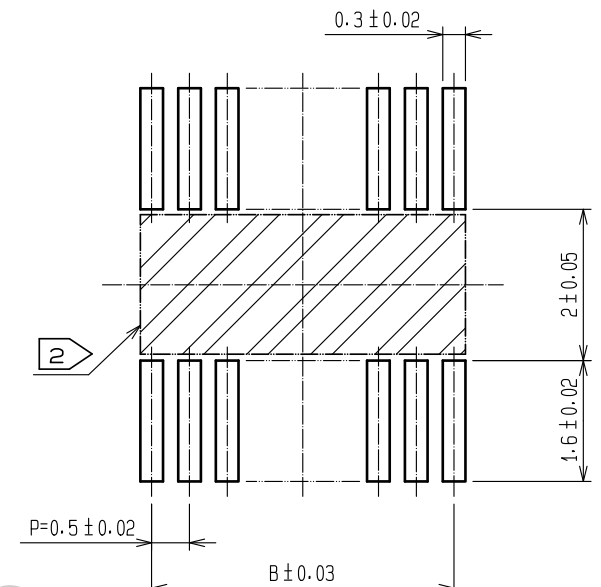

RECOMMENDED THICKNESS OF
SOLDER PASTE : 120 μm

NOTES 1 LEAD CO-PLANARITY SHALL BE 0.08 mm MAX.
2 IF THERE IS PATTERN ON PART, THERE IS A POSSIBILITY THAT IT WILL MAKE CONTACT WITH THE LEADS.

2	PHOSPHOR BRONZE	CONTACT AREA:GOLD PLATED 0.2μm min	6	PS	CLEAR (REINFORCEMENT COLLAR)
		LEAD AREA:GOLD PLATED 0.015μm min	5	PS	BLACK (PLASTIC REEL)
		OTHERS(UNDER PLATING):NICKEL PLATED 2μm min	4	POLYESTER	CLEAR (COVER TAPE)
1	POLYAMIDE	UL94V-0-NATURAL(BEIGE)	3	PS	CLEAR (EMBOSSED CARRIER TAPE)
NO.	MATERIAL	FINISH . REMARKS	NO.	MATERIAL	FINISH . REMARKS
UNITS mm		SCALE 5 : 1	COUNT 2	DESCRIPTION OF REVISIONS DIS-H-00002752	
HIROSE ELECTRIC CO., LTD.		APPROVED : KH. IKEDA	13.08.05	DRAWING NO.	EDC3-162254-77
		CHECKED : YH. MICHIDA	13.08.05	PART NO.	DF12C(3.0)-*DS-0.5V(81)
		DESIGNED : YN. SAKAMOTO	13.08.05	CODE NO.	CL537
		DRAWN : KR. AJITO	13.08.05		
		DESIGNED	SH. HOSODA	CHECKED	TS. MIYAZAKI
		DATE	17.10.10		

Feb.1.2018 Copyright 2018 HIROSE ELECTRIC CO., LTD. All Rights Reserved.

