
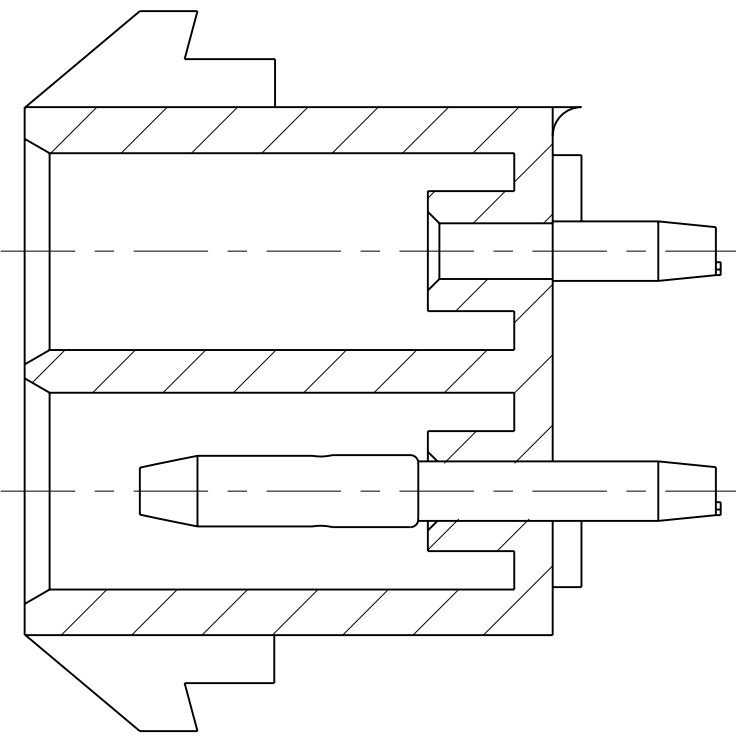
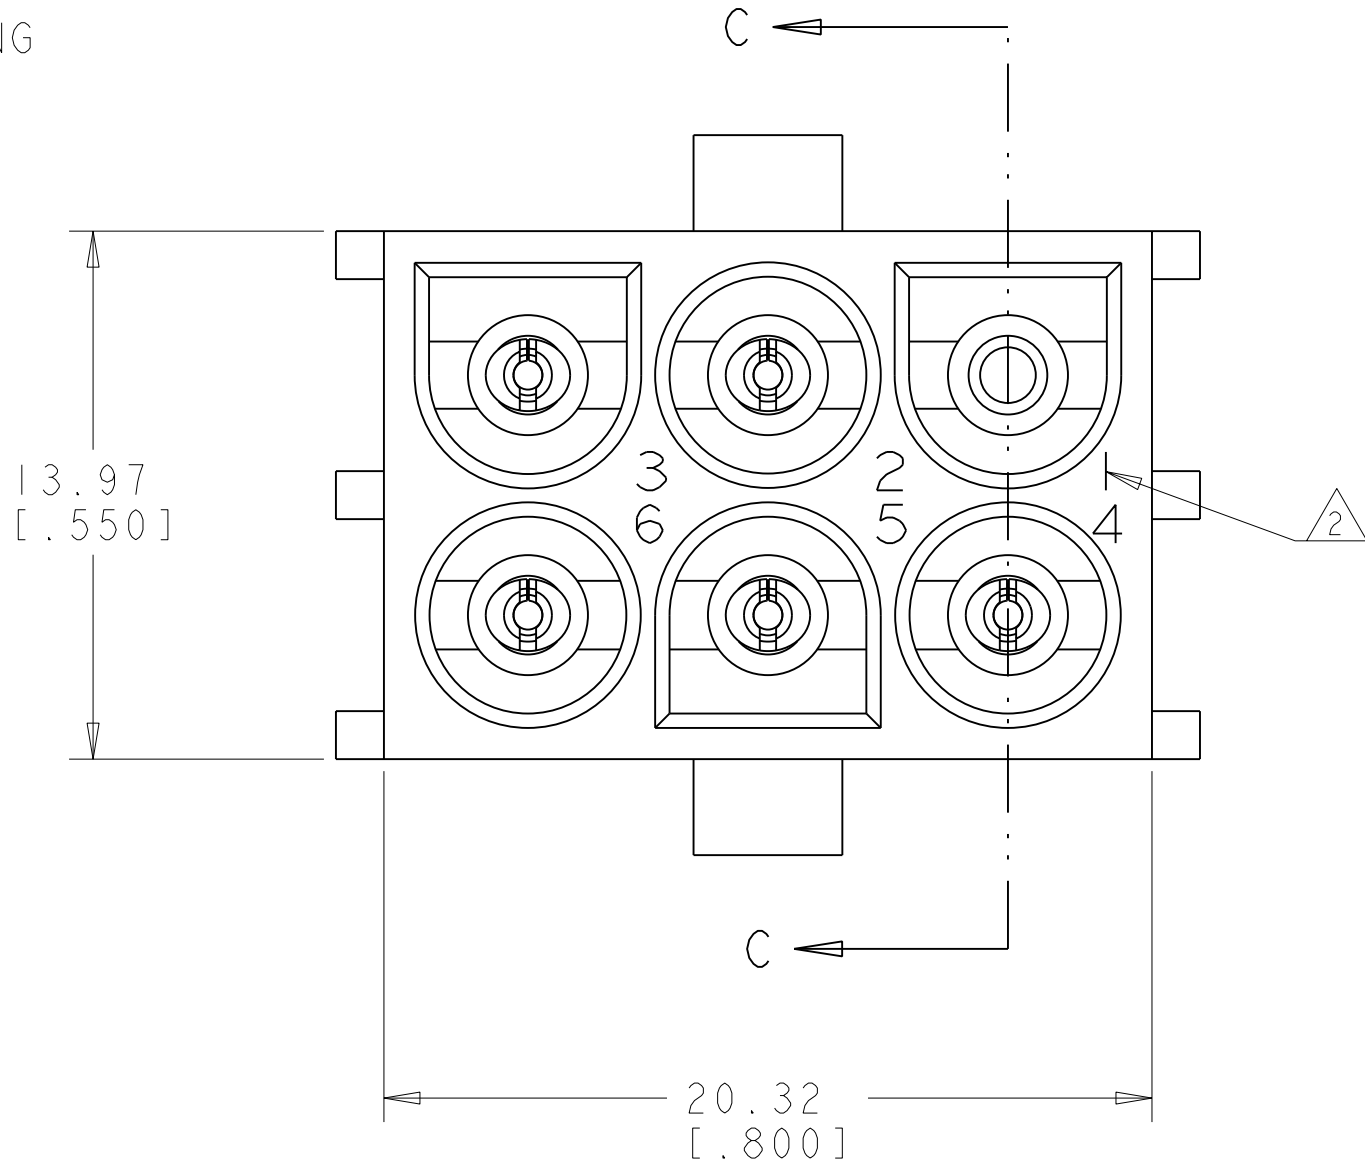
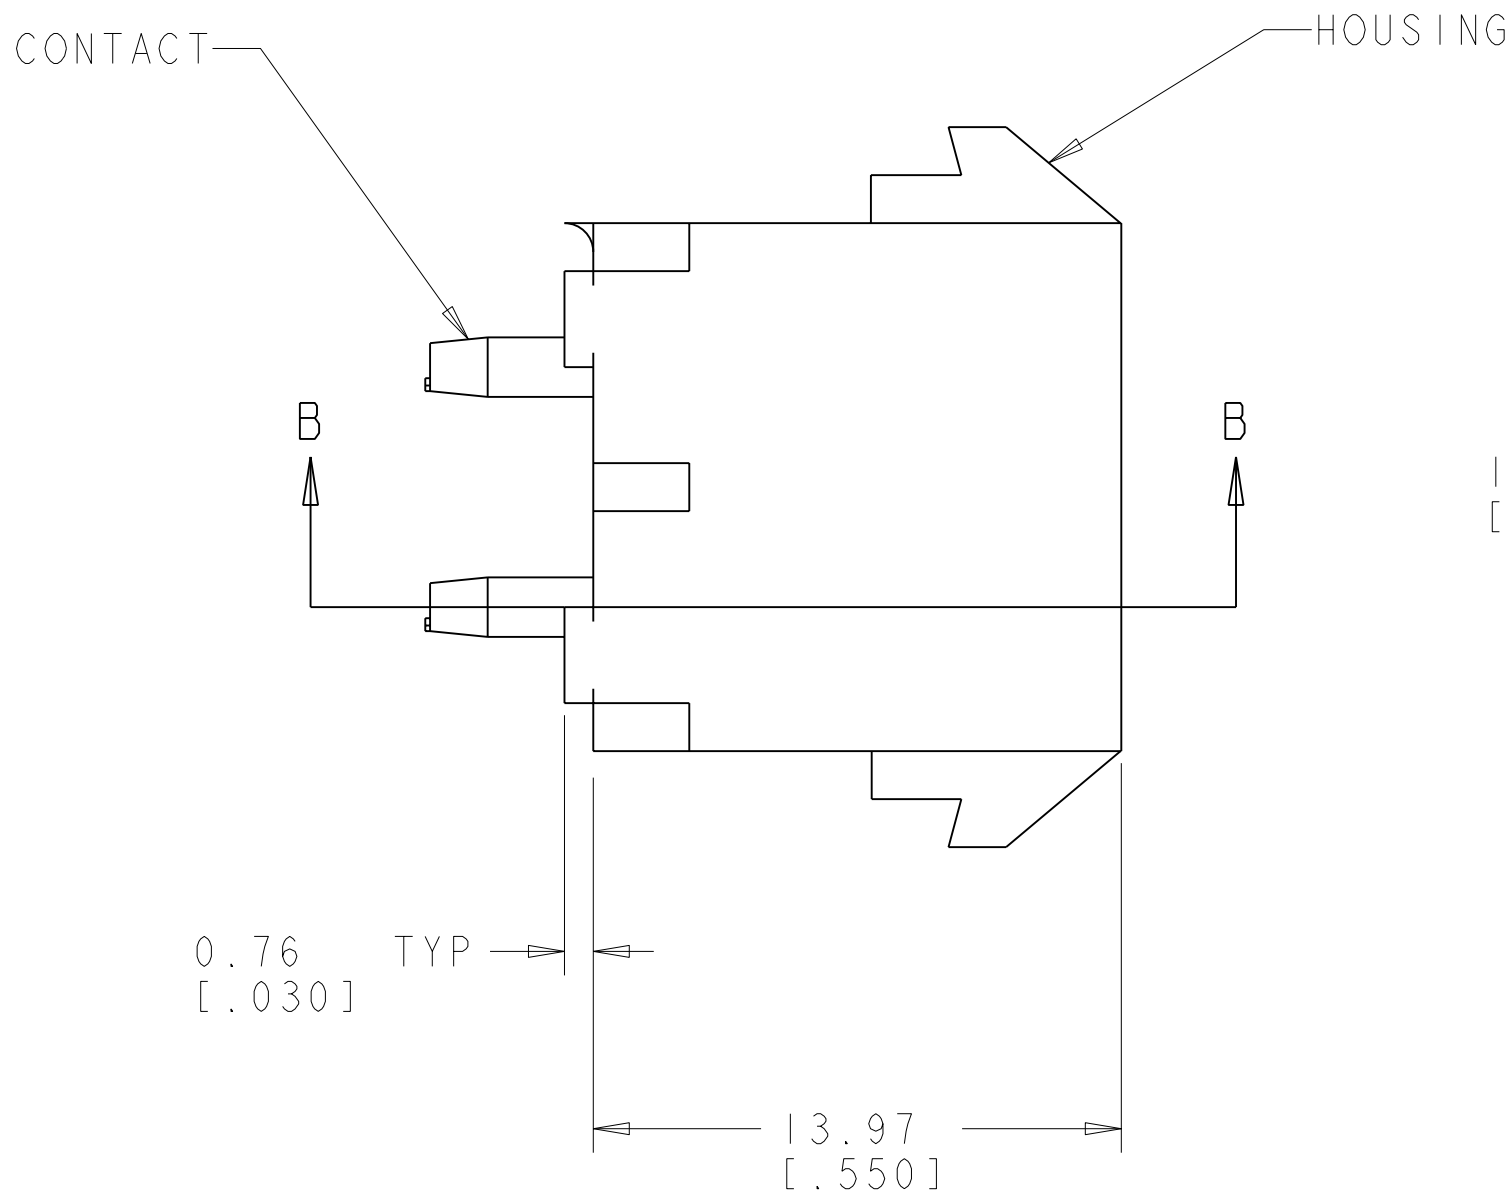


LOC	DIST	REVISIONS					
CM	00	F	LTR	DESCRIPTION	DATE	DWN	APVD
			A	RELEASED PER WR-05-27	03MAY05	KW	SR


1. PARTS COMPLY TO AMP SOLDERABILITY SPECIFICATION 109-11-3.

2. CIRCUIT IDENTIFICATION CHARACTERS ARE ADJACENT TO THE INDICATED CAVITIES, BUT LOCATION AND ORIENTATION MAY DIFFER FROM PRINT.

3. DIMENSIONS IN BRACKETS ARE IN INCHES.

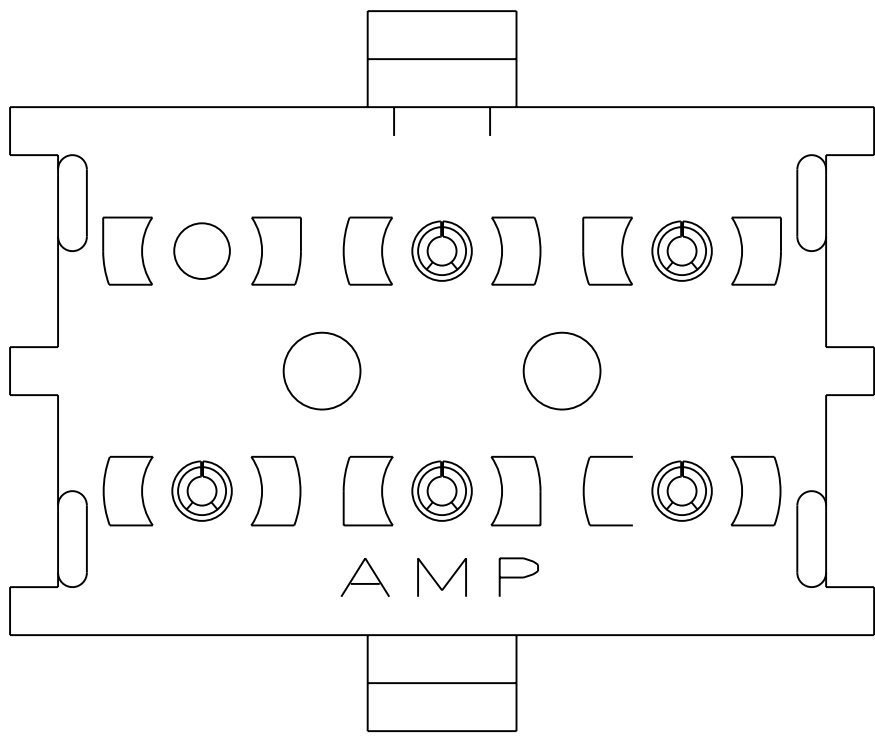


SECTION C-C

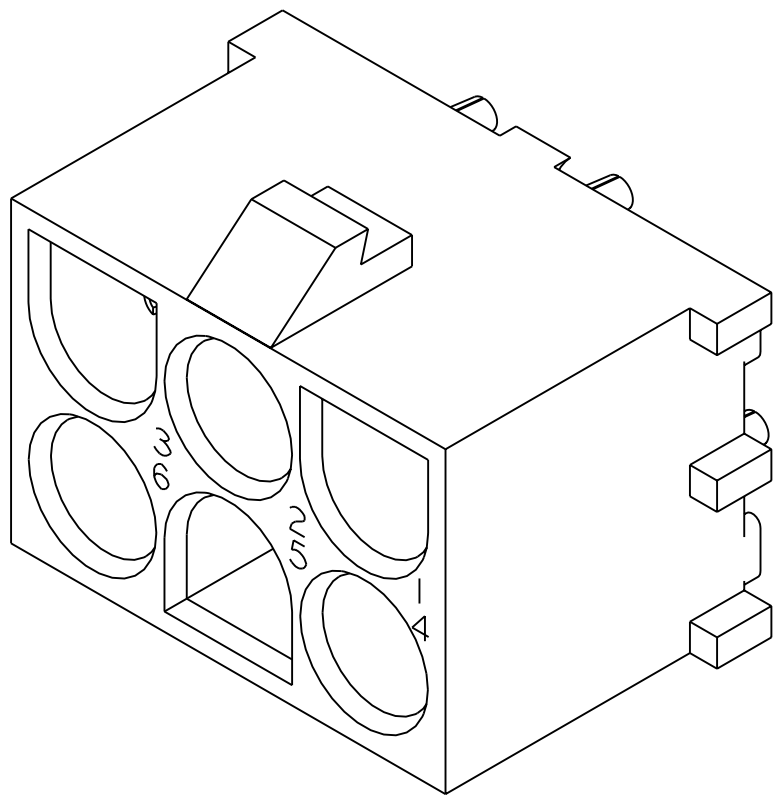


SCALE 4:1


1586680-1 SHOWN

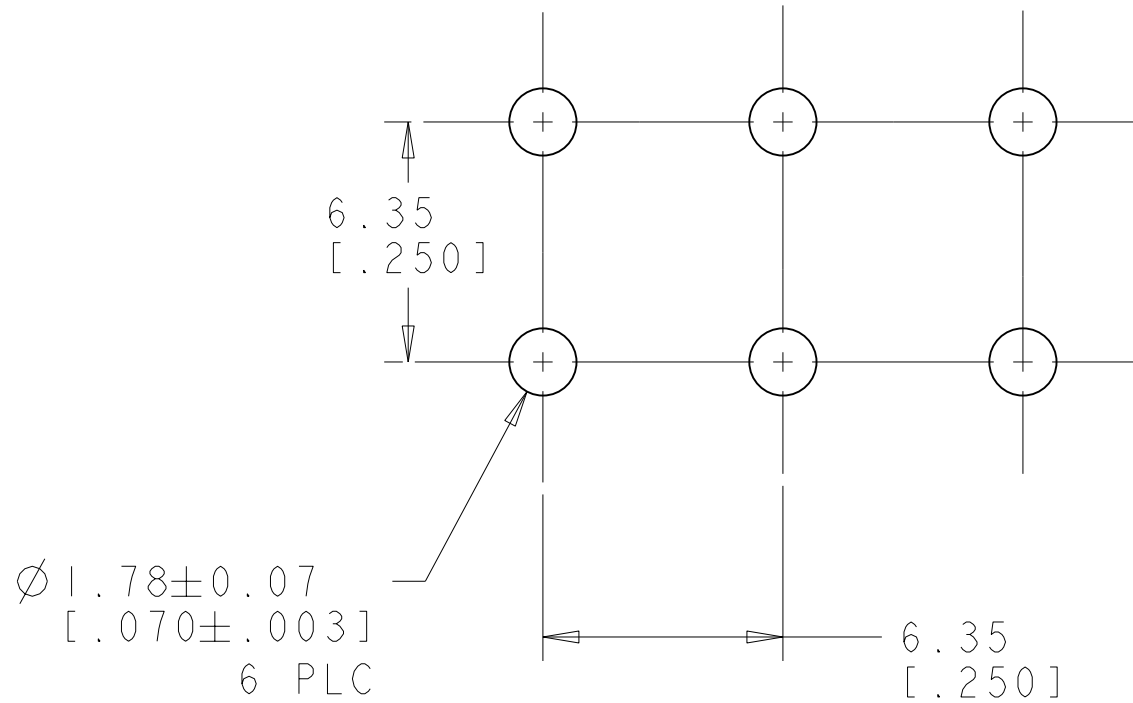

RECOMMENDED MOUNTING HOLE PATTERN FOR 1.57 [.062] THICK P.C. BOARD HOLE THAT CORRESPONDS TO REMOVED CONTACT CAN BE OMITTED

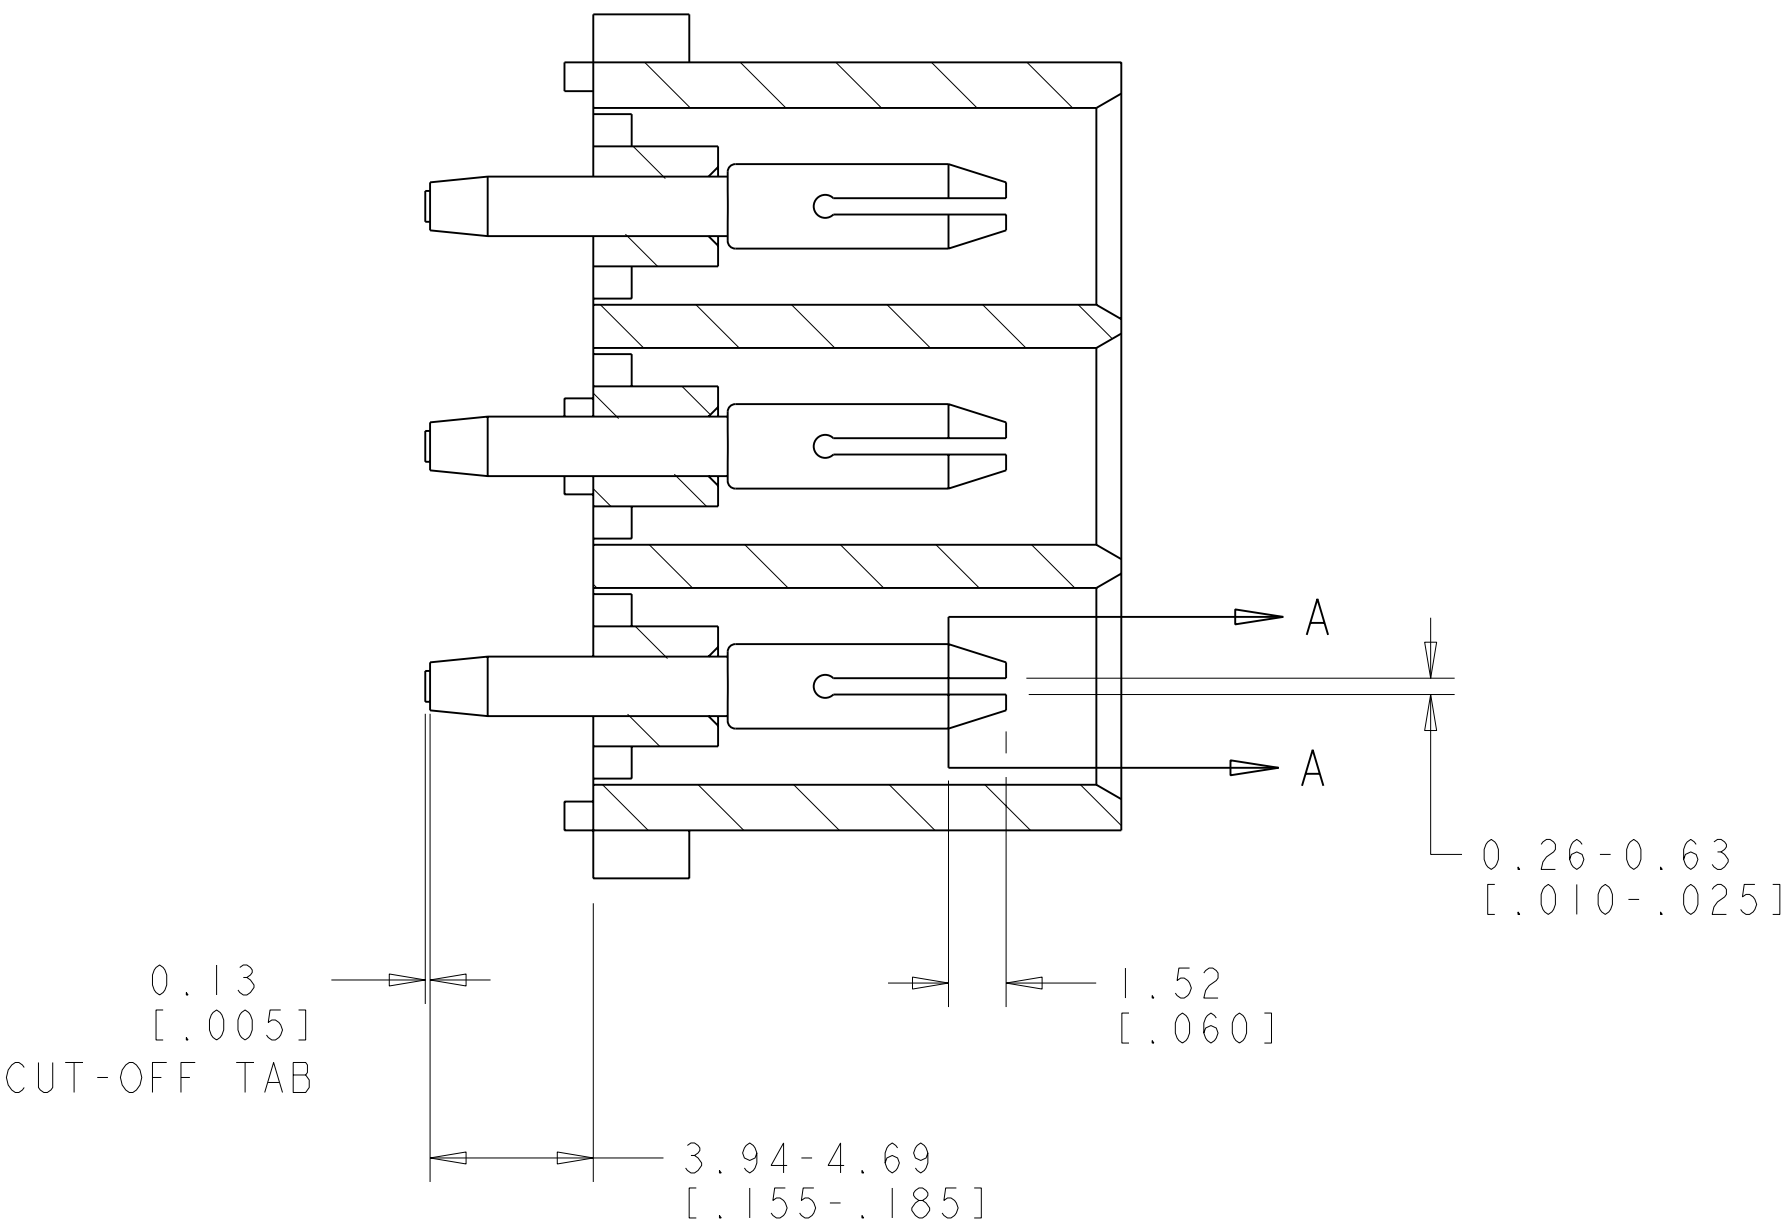


SECTION B-B

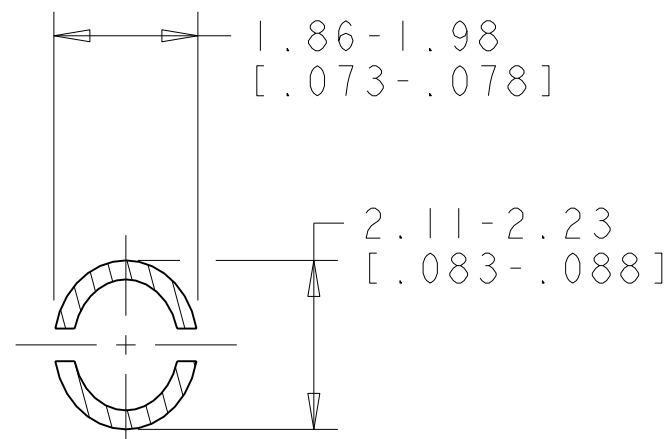

SECTION A-A
SCALE 10:1

5	PHOSPOR BRONZE, PRE-TIN	NYLON, UL94V-0, WHITE	1586680-5
1	PHOSPOR BRONZE, PRE-TIN	NYLON, UL94V-0, WHITE	1586680-1
PIN NO OMITTED	PIN CONTACT MATERIAL AND FINISH	HOUSING MATERIAL AND COLOR	PART NUMBER

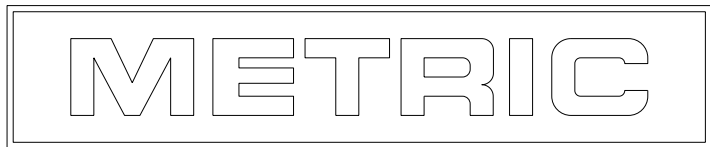

DIMENSIONS: mm[INCHES]		TOLERANCES UNLESS OTHERWISE SPECIFIED:		OWN K. WHITAKER 24-NOV-03		Tyco Electronics Harrisburg, PA 17105-3608	
0 PLC ±		1 PLC ±		CHK S. RIDGILL 24-NOV-03		NAME PIN HEADER ASSEMBLY, 6 CIRCUIT, STANDARD TAIL, SELECTIVELY LOADED, UNIVERSAL MATE-N-LOK(TM)	
2 PLC ±		3 PLC ±		APVD S. RIDGILL 24-NOV-03		SIZE A	
4 PLC ±		ANGLES 40° 30°		PRODUCT SPEC		CAGE CODE 00779	
MATERIAL SEE TABLE		FINISH SEE TABLE		APPLICATION SPEC		DRAWING NO 1586680	
				WEIGHT		RESTRICTED TO	
				CUSTOMER DRAWING		SCALE 5:1	
						SHEET 1 OF 1	
						REV A	