

INSERTABLE LEGEND SHEETS

For use with -101 or -001 legend option. Legends are die cut to fit button surface when cap is removed. Dry transfer legends offer some flexibility to customize the blank inserts included on the sheet of popular legend letters, words and symbols provided or on the insertable legends sheet.

PRINTED LEGENDS

For Maximum Versatility

Printing allows you the flexibility to create your own legend using whole words and symbols with various type styles. Durable epoxy ink printing bonds to the button cap surface. There are two types of button cap printing:

Top Surface Printing: Legend is applied directly to the top of the button. Button is recessed slightly below the keyboard housing.

Sub-Surface Printing: For insertable legend models. Provides maximum wear for printed surfaces. Printed internal button cap is protected by clear snap-on cap.

Printed Typestyles: The typestyle chart illustrates type style, size and approximate character limits for button caps. Grayhill's library of typefaces includes most popular legends.

ORDERING INFORMATION: Special Legends

Follow this procedure:


- 1. Basic Keyboard. Formulate the part number with the exception of the legend suffix.
- Mounting. Standard mounting is shown in our dimensional drawings. These drawings relate the terminal location to the button legend orientation. It is possible to rotate the button legends by 90°, changing the orientation. When mounting the keypad, it would be rotated 90° to have the legends appear upright. A 3x4 keypad thus becomes a 4x3.
- Color. Many colors, other than our standard black housing, are available. Buttons can be made from equivalent plastic in black, red, green, blue and yellow. White legends are used with dark color buttons, black with light ones. Other colors available on special order.
- 4. Buttons. Legends can be printed on button surface and protected by a snap-on cap in a similar fashion to our insertable legend types. A second option is printing a 'blank' button. (One that has the same dimensions as a molded-in legend button with a flat top surface.) Disadvantage is legend wear over time. A third option is molded-in legends, usually requiring tooling. Molded buttons are available with a flat or concave top surface.
- Legends. Specify the legend requirements for each button. Identify buttons per our dimensional drawings. Caution if keypad has been rotated.

P/N 87AC2046 - legend inserts (Font: News Gothic Condensed)

| Α | В | С | D | Ε | F | G | Н | | J | K | L | М | = |
|------|----------|----------|-------------|----------|----------|----------|----------|----------|-----------|----------|-------------|--------------|-----------|
| N | 0 | Р | Q | R | S | Τ | U | V | W | Χ | Υ | Ζ | |
| Α | В | С | D | Е | F | G | Н | | J | K | L | М | M + |
| N | 0 | Р | Q | R | S | Τ | U | V | W | Χ | Υ | Z | М- |
| ENTR | TYPE | DIAL | RE- SET | READ | DISC | LCL | SKIP | HORZ | VERT | + | _ | Χ | <u>•</u> |
| SLEW | SLEW | | RE- PEAT | STA 1 | STA 2 | STA 3 | STA 4 | STA 5 | STA 6 | STA 7 | STA 8 | STA 9 | STA 10 |
| FAST | FWD | LEFT | HOLD | LIST | REC | UP | OFF | STRT | GO | UNIT | TEN | HUND | THOU |
| SLOW | REV | RT | REL | CALL | SEND | DWN | ON | STOP | SCAN | ADD | DE- LETE | DIS- ABLE | END |
| ADD | SUB | MULT | DIV | CLR | SRCH | TRAN | MODE | MAST | SLVE | CODE | DE- CODE | EN- ABLE | % |
| 1 | ABC 2 | DEF 3 | GH I 4 | JKL 5 | MN0 6 | PRS 7 | TUV 8 | WXY 9 | OPER O | XMT | MIN | MAX | HOME |
| 1 | ABC 2 | DEF 3 | GH I 4 | JKL 5 | MN0 6 | PRS 7 | TUV 8 | WXY 9 | oper O | × | \times | # | # |
| 0 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 |
| 14 | 15 | 16 | 17 | 18 | 19 | 20 | 21 | 22 | 1 | 11 | 111 | IV | ٧ |
| 0 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 |
| 14 | 15 | 16 | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24 | 25 | 26 | 27 |
| 28 | 29 | 30 | 31 | 32 | 33 | 34 | 35 | 36 | 37 | 38 | 39 | 40 | 41 |
| 42 | 43 | 44 | 45 | 46 | 47 | 48 | 49 | 50 | 51 | 52 | 53 | 54 | 55 |
| 56 | 57 | 58 | 59 | 60 | 61 | 62 | 63 | 64 | 65 | 66 | 67 | 68 | 69 |

| Type No. and Typical Height | Sample Style and Typical Sizes | Sub Surfa Character Line Limita | and | Top Surface Character and Line Limitations | | |
|-----------------------------------|--------------------------------------|---------------------------------------|-------------|--|-------------|--|
| 4GH088 .083" | ABCDEFGH | 4 Characters 2 Lines | END DATA | 4 Characters 2 Lines | END DATA | |
| 1GH125 .138" | ABCDE | 3 Characters 1 Line | LAD | 3 Characters 1 Line | LAD | |
| 3GH187 .207" | ABCD | 2 Characters 1 Line | ON | 2 Characters 1 Line | ON | |
| 2GH250 .276" | ABC | N/A | N/A | 2 Characters 1 Line | 15 | |

ORDERING INFORMATION

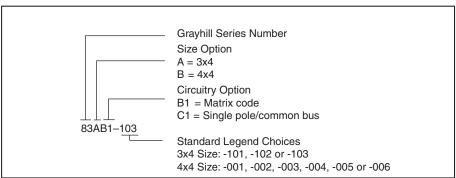

Available from your local Grayhill Distributor. For prices and discounts, contact a local Sales Office, an authorized local Distributor or Grayhill.

For prices and discounts, contact a local Sales Office, an authorized local Distributor or Grayhill.