



DIMENSIONS:

A	2.500" ±0.063
B	3.000" ±0.125
C	3.060" ±0.063
D	2.000" ±0.063
E	1.938" ±0.063
G	0.203" x 0.375" ±0.015

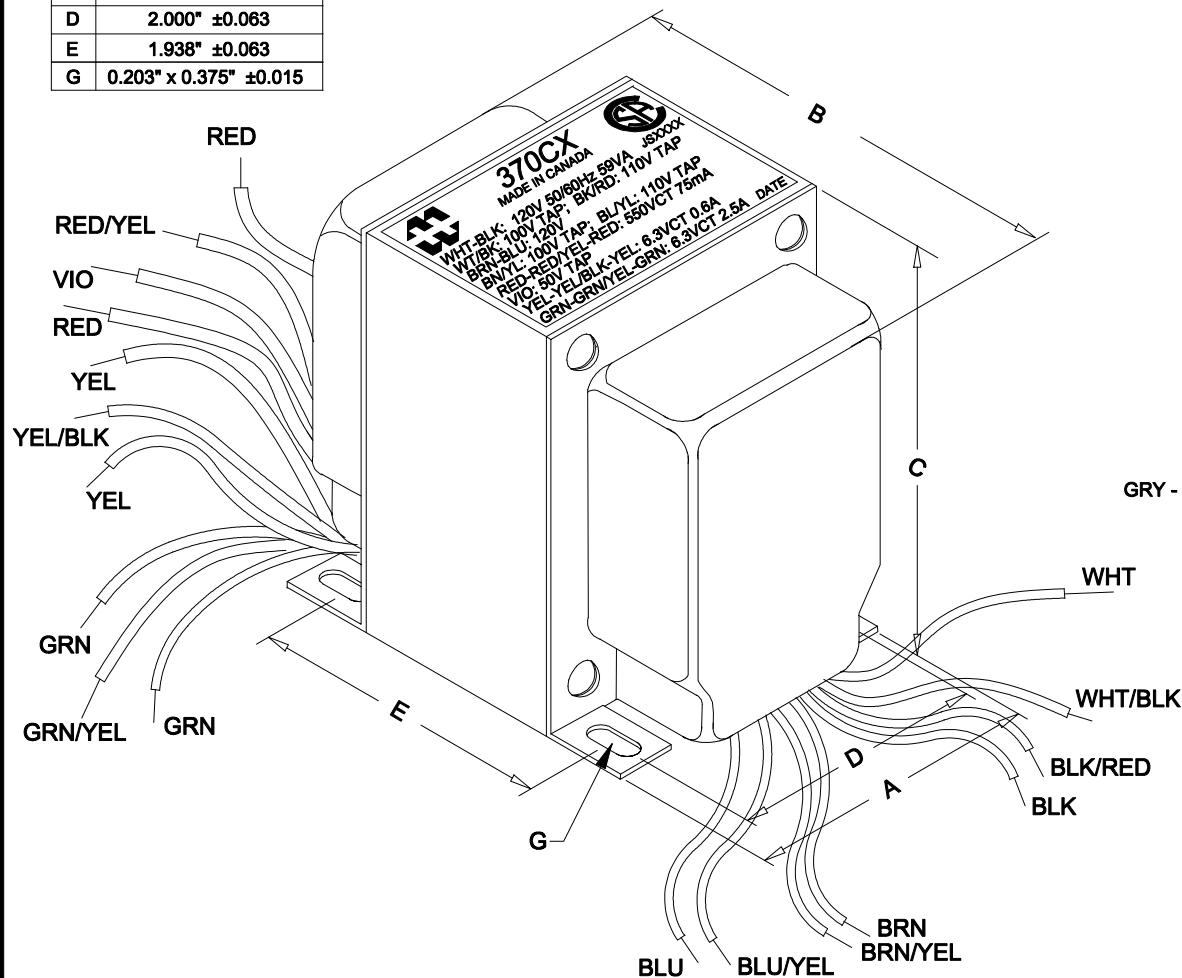

NOTE:ALL LEADS 8" OUT MIN. STRIPPED 0.5

PRIMARY SECONDARY

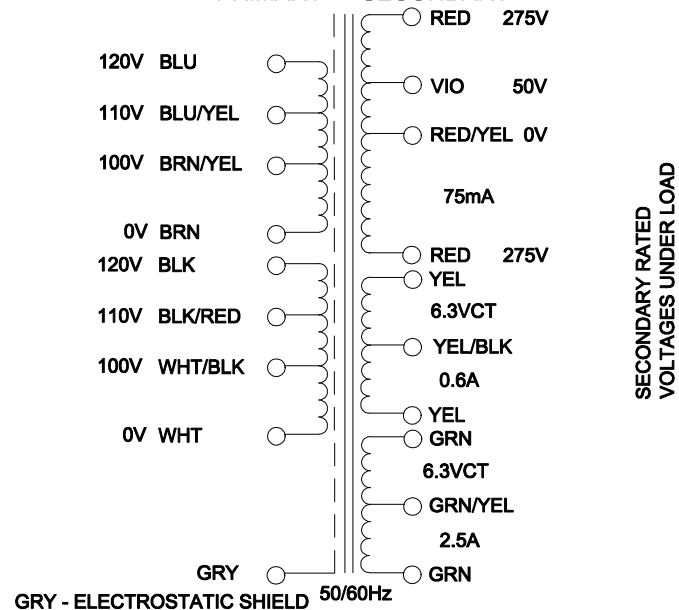

ELECTRICAL DATA:

TESTS	CONDITIONS	ACCEPTANCE CRITERIA	
I _{ex}	@ 120V, 60Hz, WHT - BLK	77mA	Max.
Sec. N.L.V	@ 120V, 60Hz, WHT - BLK		
	RED - RED =	608.8V	±2%
	RED - RED/YEL = RED/YEL - RED =	304.4V	±2%
	RED/YEL - VIO =	50.00V	±2%
	YEL - YEL =	6.977V	±2%
	YEL - YEL/BLK = YEL/BLK - YEL =	3.488V	±2%
	GRN - GRN =	6.977V	±2%
	GRN - GRN/YEL = GRN/YEL - GRN =	3.488V	±2%
DCR	@ 20°C, WHT - BLK =	14.39 Ω	±20%
	@ 20°C, BRN - BLU =	15.81 Ω	±20%
	@ 20°C, RED - RED =	361.3 Ω	±20%
	@ 20°C, YEL - YEL =	0.435 Ω	±20%
	@ 20°C, GRN - GRN =	0.112 Ω	±20%
HIPOT	PRIMARY - SECONDARY	2500V, 60Hz, 1 SEC	

REV.#	REVISION	DATE	HAMMOND ELECTRONIC DIVISION			
0	RELEASED.	C.I. 09/07/12	52 RANKIN PLACE, WATERLOO, ONTARIO, N2J 3Z5			
			PH # (519) 886-6181			
			FAX # (519) 886-9540			
			DWG. BY: C. ILIE	CHK'D BY:	TITLE: POWER TRANSFORMER	DWG. NO. 370CX
			DATE: 09/07/12	APP'D. BY:		
				DIMENSIONS: IN(X) MM()		