

EB52F3E50V-40.000M
 Click part number to visit
Part Number Details page
REGULATORY COMPLIANCE (Data Sheet downloaded on Oct 3, 2016)**ITEM DESCRIPTION**

Temperature Compensated Quartz Crystal Clock Oscillators TCXO LVCMOS (CMOS) 3.3Vdc 14-Pin DIP Metal Thru-Hole
40.000MHz ± 5.0 ppm Maximum -40°C to +85°C

ELECTRICAL SPECIFICATIONS

Nominal Frequency	40.000MHz
Frequency Stability	± 5.0 ppm Maximum (Inclusive of Operating Temperature Range)
Frequency Stability vs. Input Voltage	± 0.3 ppm Maximum ($\pm 5\%$)
Frequency Stability vs. Load	± 0.2 ppm Maximum (± 2 pF)
Frequency Stability vs. Aging	± 1 ppm/Year Maximum (at 25°C)
Operating Temperature Range	-40°C to +85°C
Supply Voltage	3.3Vdc $\pm 5\%$
Input Current	20mA Maximum
Output Voltage Logic High (Voh)	90% of Vdd Minimum
Output Voltage Logic Low (Vol)	10% of Vdd Maximum
Rise/Fall Time	10nSec Maximum (Measured at 20% to 80% of waveform)
Duty Cycle	50 ± 10 (%) (Measured at 50% of waveform)
Load Drive Capability	15pF Maximum
Output Logic Type	CMOS
Control Voltage	1.65Vdc ± 1.35 Vdc
Frequency Deviation	± 7 ppm Minimum, ± 20 ppm Maximum (Referenced to Fo at Vc=1.65Vdc; Vdd=3.3Vdc)
Transfer Function	Positive Transfer Characteristic
Internal Trim	± 3 ppm Minimum (Top of Can)
Modulation Bandwidth	10kHz Minimum (Measured at -3dB with a Control Voltage of 1.65Vdc)
Input Impedance	10kOhms Typical
Phase Noise	-70dBc at 10Hz Offset -100dBc at 100Hz Offset -130dBc at 1kHz Offset -140dBc at 10kHz Offset -145dBc at 100kHz Offset (All Values are Typical)
Storage Temperature Range	-40°C to +85°C


ENVIRONMENTAL & MECHANICAL SPECIFICATIONS

Fine Leak Test	MIL-STD-883, Method 1014 Condition A (Internal Crystal Only)
Gross Leak Test	MIL-STD-883, Method 1014 Condition C (Internal Crystal Only)
Lead Integrity	MIL-STD-883, Method 2004
Mechanical Shock	MIL-STD-202, Method 213 Condition C
Resistance to Soldering Heat	MIL-STD-202, Method 210
Resistance to Solvents	MIL-STD-202, Method 215
Solderability	MIL-STD-883, Method 2003
Temperature Cycling	MIL-STD-883, Method 1010
Vibration	MIL-STD-883, Method 2007 Condition A

EB52F3E50V-40.000M

 Click part number to visit
Part Number Details page

MECHANICAL DIMENSIONS (all dimensions in millimeters)

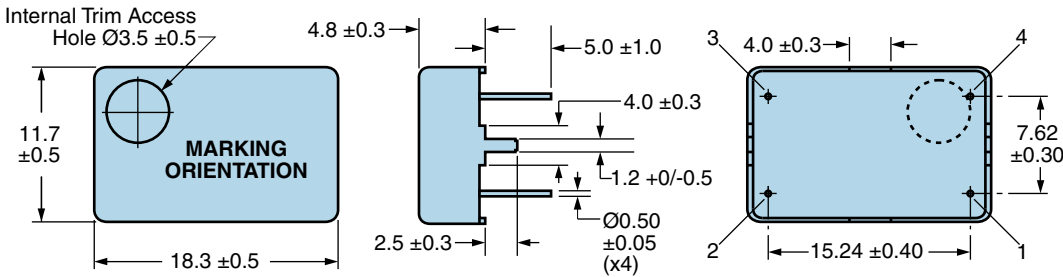


PIN	CONNECTION
1	Voltage Control
2	Case/Ground
3	Output
4	Supply Voltage

LINE	MARKING
1	ECLIPTEK
2	40.000M
3	XXXXXX XXXXXX=Ecliptek Manufacturing Identifier

EB52F3E50V-40.000M [Click part number to visit Part Number Details page](#)




OUTPUT WAVEFORM

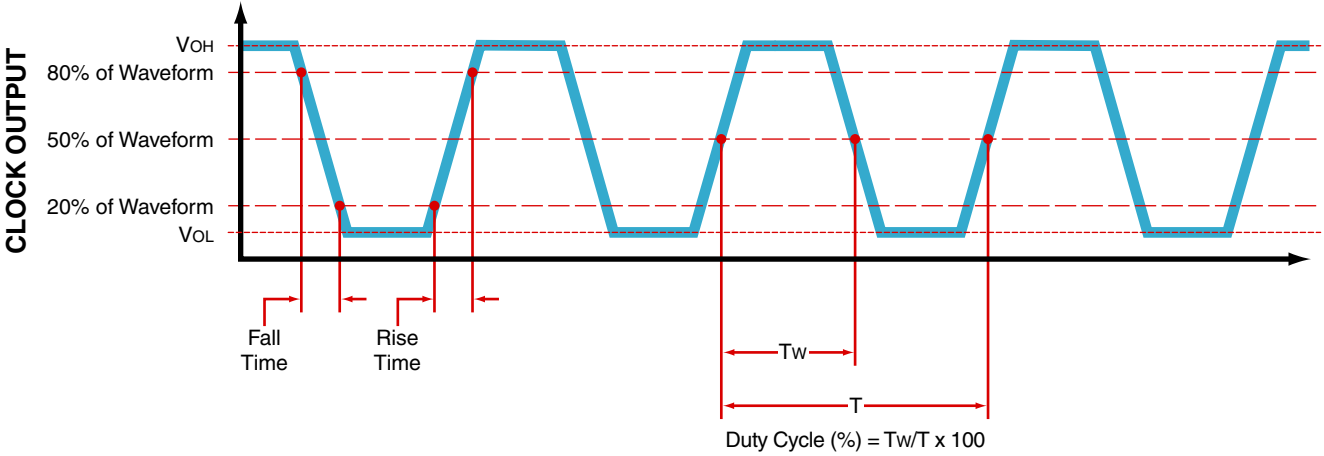

EB52F3E50V-40.000M

[Click part number to visit Part Number Details page](#)

Test Circuit for Voltage Control Option

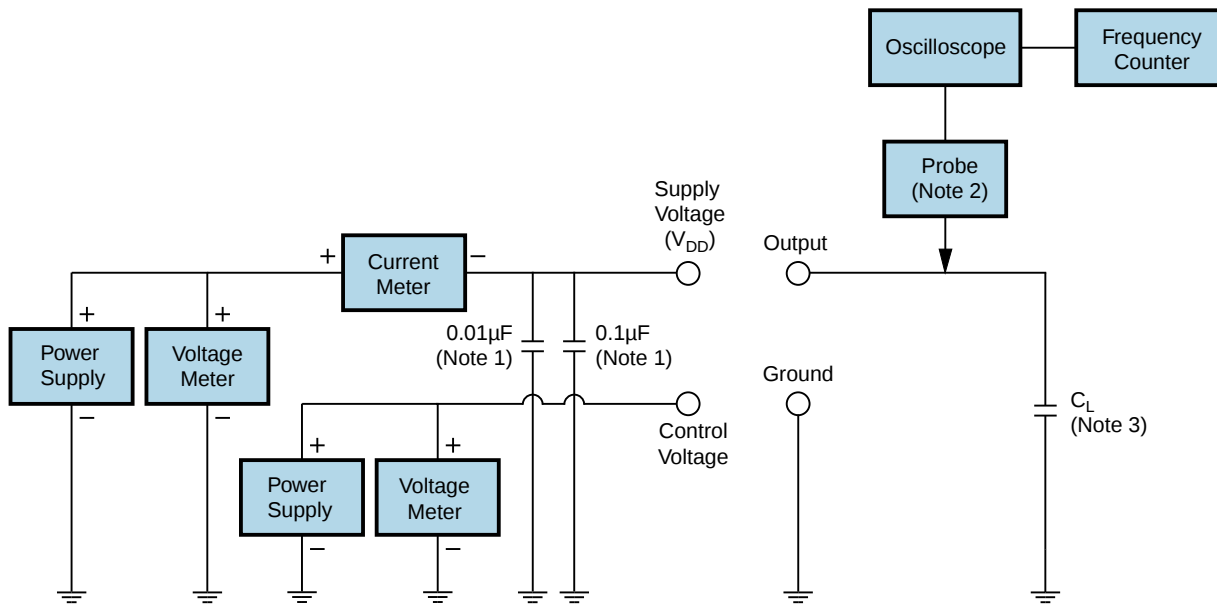

Note 1: An external $0.01\mu\text{F}$ ceramic bypass capacitor in parallel with a $0.1\mu\text{F}$ high frequency ceramic bypass capacitor close (less than 2mm) to the package ground and supply voltage pin is required.

Note 2: A low capacitance ($<12\text{pF}$), 10X attenuation factor, high impedance ($>10\text{Mohms}$), and high bandwidth ($>300\text{MHz}$) passive probe is recommended.

Note 3: Capacitance value C_L includes sum of all probe and fixture capacitance.

EB52F3E50V-40.000M

[Click part number to visit Part Number Details page](#)

Recommended Solder Reflow Methods



Low Temperature Solder Bath (Wave Solder)

T _S MAX to T _L (Ramp-up Rate)	5°C/Second Maximum
---	--------------------

Preheat

- Temperature Minimum (T _S MIN)	N/A
- Temperature Typical (T _S TYP)	150°C
- Temperature Maximum (T _S MAX)	N/A
- Time (t _s MIN)	30 - 60 Seconds

Ramp-up Rate (T _L to T _P)	5°C/Second Maximum
--	--------------------

Time Maintained Above:

- Temperature (T _L)	150°C
- Time (t _L)	200 Seconds Maximum

Peak Temperature (T _P)	245°C Maximum
------------------------------------	---------------

Target Peak Temperature (T _P Target)	245°C Maximum 1 Time / 235°C Maximum 2 Times
---	--

Time within 5°C of actual peak (t _P)	5 Seconds Maximum 1 Time / 15 Seconds Maximum 2 Times
--	---

Ramp-down Rate	5°C/Second Maximum
----------------	--------------------

Time 25°C to Peak Temperature (t)	N/A
-----------------------------------	-----

Moisture Sensitivity Level	Level 1
----------------------------	---------

Low Temperature Manual Soldering

185°C Maximum for 10 Seconds Maximum, 2 times Maximum. (Temperatures listed are applied to device leads only.)

High Temperature Manual Soldering

260°C Maximum for 5 Seconds Maximum, 2 times Maximum. (Temperatures listed are applied to device leads only.)

Low Temperature Solder Bath (Wave Solder) Note 1

Device is non-hermetic; Post reflow aqueous wash is not recommended

EB52F3E50V-40.000M [Click part number to visit Part Number Details page](#)

Low Temperature Solder Bath (Wave Solder) Note 2

Temperatures shown are applied to back of PCB board and device leads only.