

main menue



home  
test & measurement  
products  
skills  
download

online catalogue T&M

clamp-type test probes  
crocodile clips  
test probes  
oscilloscope test probes  
measuring leads  
plugs  
sockets  
    ▶ 2 mm system  
    ▶ 2 mm safety system  
    ▶ 4 mm system  
    ▶ 4 mm safety system  
sets  
miscellaneous  
  
company  
    portrait  
    corporate association  
    location maps  
    fairs and exhibitions  
    jobs  
    imprint  
    terms and conditions

Home ▶ sockets ▶ 4 mm safety system ▶ sockets ▶ 4 mm safety system ▶ BUELA 300 K

BUELA 300 K

datasheet for BUELA 300 K  
article number: 931667104



View Full-Size Image



search online catalogue


Search

Messetermine

SPS/IPC/DRIVES  
24. 11. 2015 - 26. 11. 2015

QR-Code

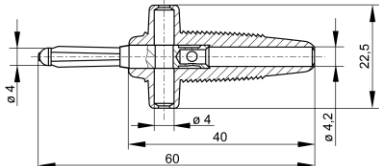

|                                                |  |                                                                                                                                                                                                                                                                                                                        |  |
|------------------------------------------------|--|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--|
| <b>product description:</b>                    |  | order number: 931 667-104                                                                                                                                                                                                                                                                                              |  |
| <b>description:</b>                            |  | Multiple-spring wire plug, shatter-proof, flexible insulated sleeve with transverse hole. Lateral supports provide protection against contact when plugged in at right angles. The tapering sleeve end also serves as kinking protection for the lead. Solder connection up to maximum cable cross-section of 2.5 mm². |  |
| <b>typ:</b>                                    |  | BUELA 300 K gruen/green                                                                                                                                                                                                                                                                                                |  |
| <b>system:</b>                                 |  | 4mm system                                                                                                                                                                                                                                                                                                             |  |
| <b>order number:</b>                           |  | 931 667-104                                                                                                                                                                                                                                                                                                            |  |
| <b>color</b>                                   |  |                                                                                                                                                                                                                                       |  |
| <b>other color versions:</b>                   |  |                                                                                                                                                                                                                                       |  |
| <b>technical data</b>                          |  |                                                                                                                                                                                                                                                                                                                        |  |
| <b>measurement category acc. to IEC 61010:</b> |  | CAT I                                                                                                                                                                                                                                                                                                                  |  |
| <b>pin dimensions</b>                          |  | 4 mm                                                                                                                                                                                                                                                                                                                   |  |
| <b>type of contact:</b>                        |  | pin (spring loaded)                                                                                                                                                                                                                                                                                                    |  |
| <b>type of termination:</b>                    |  | solder                                                                                                                                                                                                                                                                                                                 |  |
| <b>rated voltage:</b>                          |  | 30 VAC / 60 VDC                                                                                                                                                                                                                                                                                                        |  |
| <b>rated current:</b>                          |  | 30 A                                                                                                                                                                                                                                                                                                                   |  |
| <b>Please consider derating curve!</b>         |  |                                                                                                                                                                                                                                                                                                                        |  |
| <b>contact resistance:</b>                     |  | 10 mOhm                                                                                                                                                                                                                                                                                                                |  |
| <b>material</b>                                |  |                                                                                                                                                                                                                                                                                                                        |  |
| <b>contact material:</b>                       |  | brass                                                                                                                                                                                                                                                                                                                  |  |
| <b>contact surface material:</b>               |  | nickel                                                                                                                                                                                                                                                                                                                 |  |
| <b>housing material:</b>                       |  | PVC - P                                                                                                                                                                                                                                                                                                                |  |
| <b>environmental conditions:</b>               |  |                                                                                                                                                                                                                                                                                                                        |  |
| <b>temperature range:</b>                      |  | -25 °C to +70 °C                                                                                                                                                                                                                                                                                                       |  |
| <b>drawing</b>                                 |  |                                                                                                                                                                                                                                                                                                                        |  |
|                                                |  |                                                                                                                                                                                                                                    |  |