



SPRING-LOADED CONNECTORS

SERIES 856 • .050" GRID FLAT & CONCAVE FACE TARGET CONNECTORS FOR SPRING-LOADED ASSEMBLIES • SINGLE ROW STRIPS

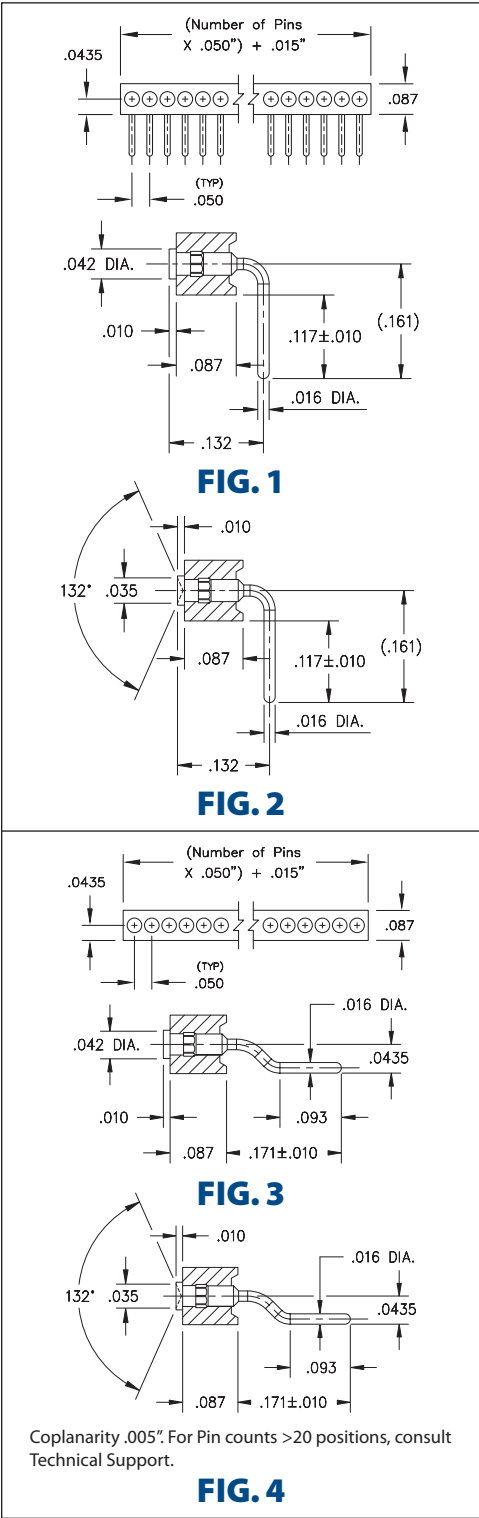

- Series 856 Spring Target Connectors, supplied in single row strips
- Spring Target Connectors are offered with a flat or concave surface for making contact with our standard .019" dia. spring pin plungers. The target connectors provide an excellent gold-plated conductive path back to the board-mounted spring pin connector
- Target connectors use MM #1831-1 and #1931-1 pins. See page 223.2 for details
- Insulators are high temperature thermoplastic

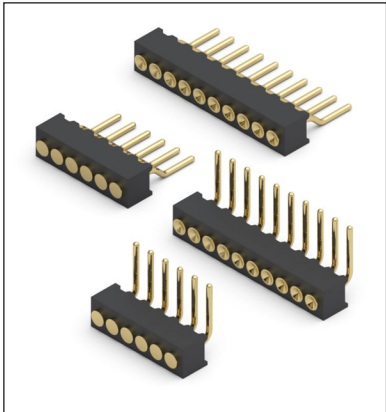

ORDERING INFORMATION

FIG. 1	Series 856...20-001	Flat face / Right Angle
	856-10-0	-20-001000 Specify number of pins 01-20
FIG. 2	Series 856...20-002	Concave face / Right Angle
	856-10-0	-20-002000 Specify number of pins 01-20
FIG. 3	Series 856...40-001	Flat face / Surface Mount
	856-10-0	-40-001000 Specify number of pins 01-20
FIG. 4	Series 856...40-002	Concave face / Surface Mount
	856-10-0	-40-002000 Specify number of pins 01-20
RoHS-2 2011/65/EU XX=Plating Code See Below For Electrical, Mechanical & Environmental Data, See page 264		
SPECIFY PLATING CODE XX=		
Pin Plating	10 μ Au	

