
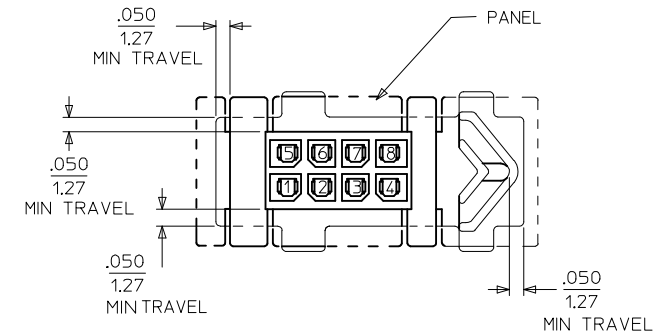



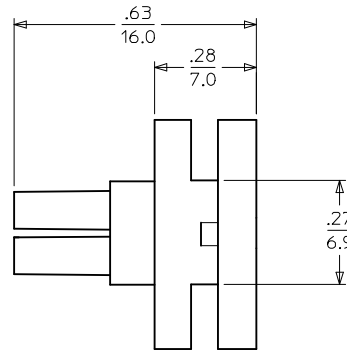

12. THE WIDTH OF THE NARROW SLOTS SHOULD BE .114-.129/2.90-3.28 (MIN-MAX) IF KEYING OF THE CONNECTOR TO THE CUT-OUT IS DESIRED.

FIX DIMENSION (G7) EC NO: UCP2012-3877 DRAWN:MS.TROH 2012/05/25 CHKD:S.SOUSSEK 2012/06/08 APPR:F.SMITH 2012/12/19	DESCRIPTION	QUALITY SYMBOLS	GENERAL TOLERANCES (UNLESS SPECIFIED)			DIMENSION STYLE IN/MM		SCALE ---	DESIGN UNITS METRIC	 THIRD ANGLE PROJECTION	
				mm	INCH	DRAWN BY SOMMER	DATE 1998/09/30	TITLE MICRO-FIT (3.0) BMI FLOATING PANEL RECEPTACLE, 4-24 CIRCUIT molex			
			4 PLACES	± ---	± ---	CHECKED BY SOMMER	DATE 1998/09/30				
			3 PLACES	± ---	± .010	APPROVED BY	DATE				
			2 PLACES	± 0.25	± .014	EDGLEY	1998/09/30				
			1 PLACE	± 0.35	± ---	MATERIAL NO.	DOCUMENT NO.				
			0 PLACE	±	±	SEE CHART		SD-44133-001			1 OF 1
			ANGULAR ±1/2°								
			DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS			SIZE C	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION				
			REV								