



引き出し方向
PULL OUT

DIRECTION

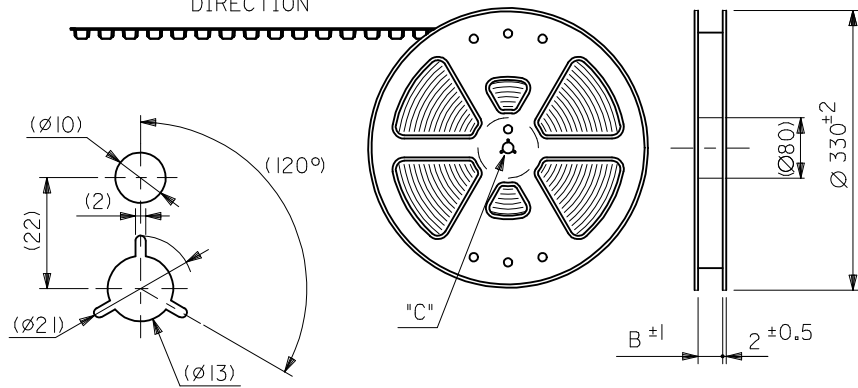


DETAIL "C"

引き出し方向
PULL OUT DIRECTION




SECT. Z-Z

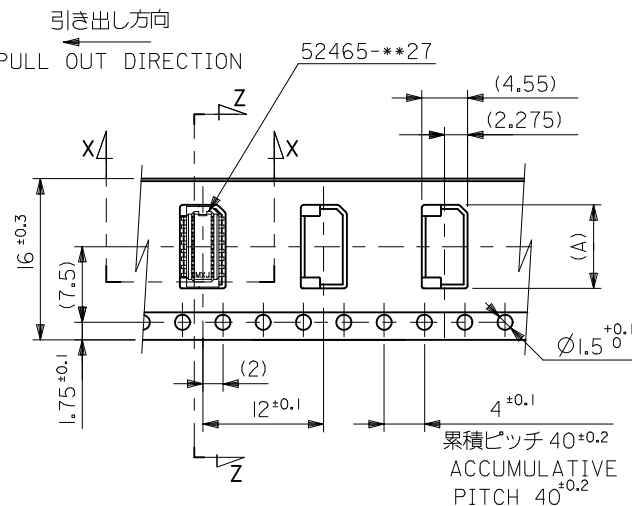

累積ピッチ 40±0.2
ACCUMULATIVE
PITCH 40±0.2

16mm幅キャリアテープ
16mm WIDTH CARRIER TAPE




SECT. X-X
(SCALE:5-1)

注記 NOTES


- 梱包数量：1000個/リール NUMBER OF CONNECTORS:1000PCS/REEL
- リードテープ長さ LEAD TAPE LENGTH

トップテープ リーダー部 TOP TAPE LEADER PART
トップテープ 未接着部 TOP TAPE NON-BONDED PART

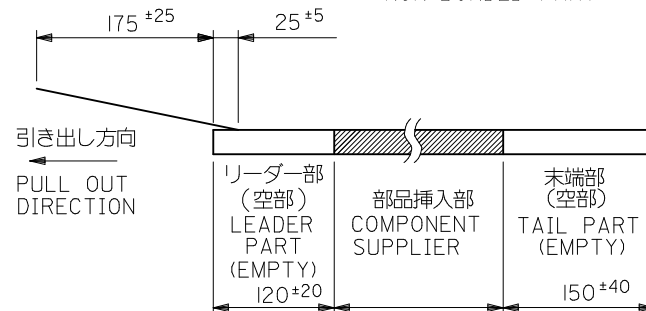

- トップテープの剥離強度：(剥離方向は下図参照)
0.1N～0.7N(10.2gf～71.4gf) 尚、本規格値は、出荷時に適用。
(但し、輸送時に剥離が発生しない事。)

PEELING OFF FORCE OF TOP TAPE
0.1N～0.7N(10.2gf～71.4gf)(PEELING DIRECTION AS SHOWN IN FOLLOWING FIG.)
THIS REQUIREMENT SHOULD BE APPLIED AT SHIPMENT
PEEL OFF SHOULD NOT BE ALLOWED,
DURING TRANSPORTATION







- 材料
キャリアテープ：ポリプロピレン (PP) CARRIER TAPE:POLYPROPYLENE
トップテープ：PET, PE, PEF TOP TAPE:PET,PE,PEF
リール：ポリスチレン (PS) REEL:POLYSTYRENE(PS)
<リサイクル材を含む> <RECYCLE MATERIAL CONTAINED>

16	17.5	6.7 5.9	52465-1291 52465-1091	12 10
キャリアテープ幅 CARRIER TAPE WIDTH	B	(A)	MATERIAL NO.	極数 CIRCUIT

MODEL NO. 52465-***91


REVISED EC NO: J2009-1417 DRAWN:NAKAMURAA CHK'D:T. HARUYAMA APPR:NUKITA	DESCRIPTION	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM ONLY		SCALE ---	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION		
		10 UNDER	± ---	DRAWN BY K. ASAKAWA	DATE '91/11/22	TITLE 0.8 B-T0-B HSG ASSY SMT EMBSTP PKG				
		10 OVER 30 UNDER	± ---	CHECKED BY T. ITO	DATE '00/12/20					
		30 OVER	± ---	APPROVED BY M. FUKUSHIMA	DATE '00/12/20	MOLEX MOLEX INCORPORATED				
		ANGULAR ± --- °		MATERIAL NO.		DOCUMENT NO.		SHEET NO.		
		DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		SEE TABLE		SD-52465-041		1 OF 2		
REV		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION								

10 9 8 7 6 5 4 3 2 1

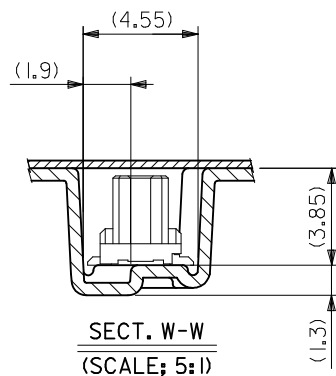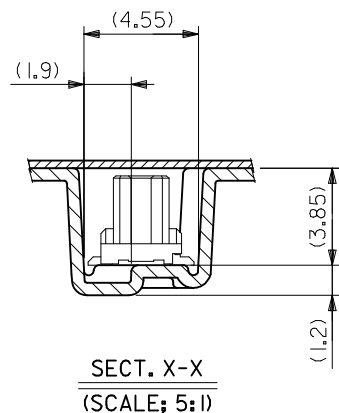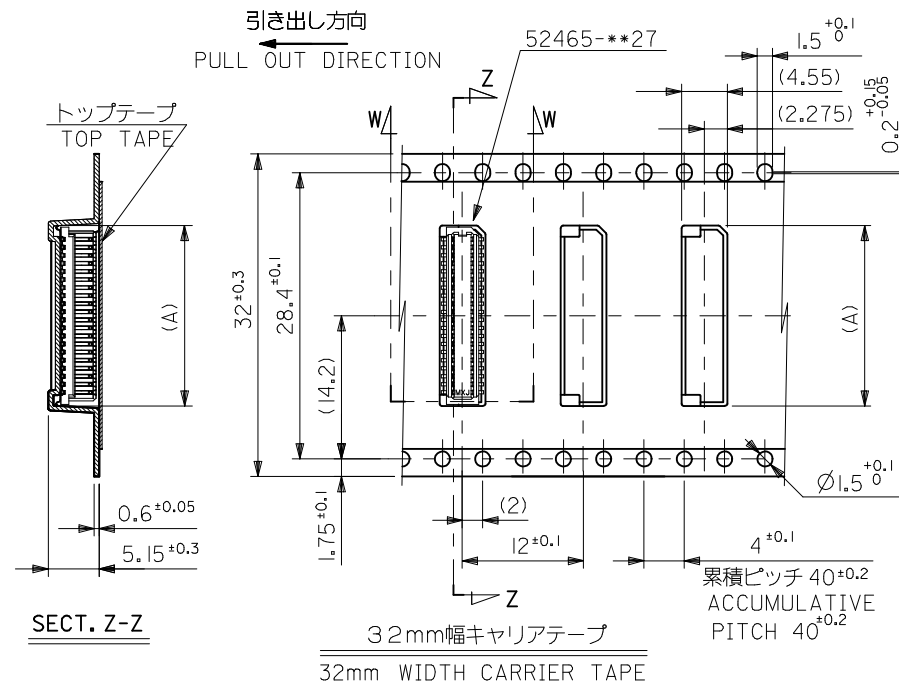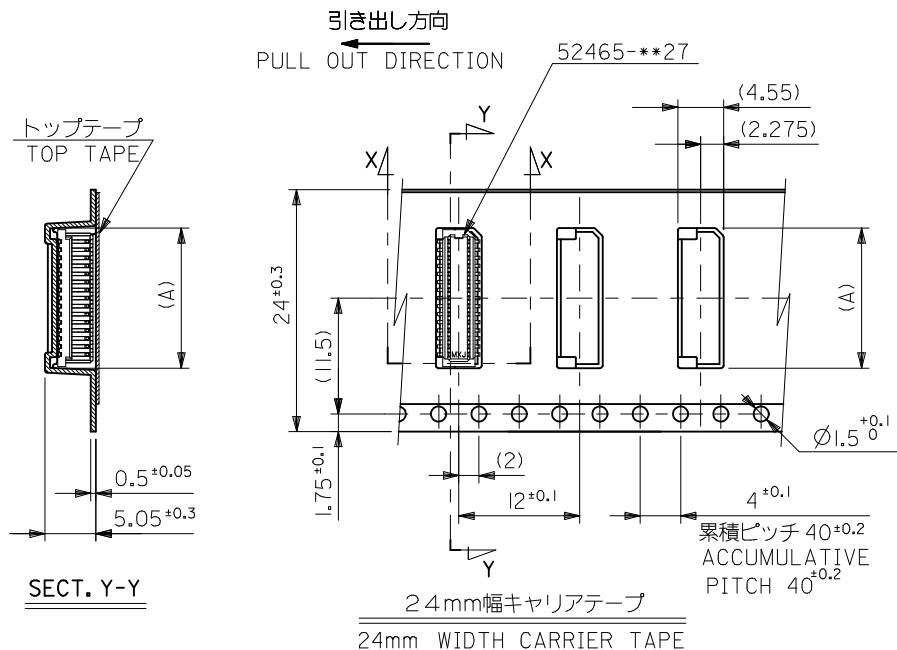

32	33.5	17.9	52465-4091	40
24	25.5	14.7	52465-3291	32
		13.1	52465-2891	28
		12.3	52465-2691	26
		9.9	52465-2091	20
キャリアテープ幅 CARRIER TAPE WIDTH	B	(A)	MATERIAL NO.	極数 CIRCUIT

MODEL NO. 52465-**-91

REVISED EC NO: J2009-1417 DFWINAKAMURAA 2008/12/15 CHKD.T. HARUYAMA 2008/12/15 APPR: NUKITA 2009/01/14	DESCRIPTION	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM ONLY		SCALE ---	DESIGN UNITS METRIC	 THIRD ANGLE PROJECTION
		10 UNDER	± ---	DRAWN BY K. ASAKAWA	DATE '91/11/22	TITLE 0.8 B-T0-B HSG ASSY SMT EMBSTP PKG		
		10 OVER 30 UNDER	± ---	CHECKED BY T. ITO	DATE '00/12/20			
		30 OVER	± ---	APPROVED BY M. FUKUSHIMA	DATE '00/12/20			
		ANGULAR ± --- °		MATERIAL NO.				
	DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		SEE TABLE		SD-52465-041		2 OF 2	
	REV	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION						

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Molex:

52465-1091