

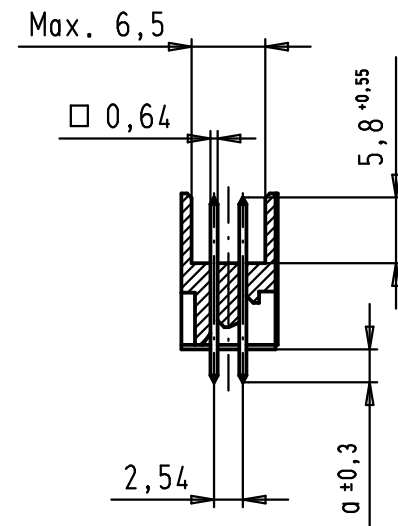
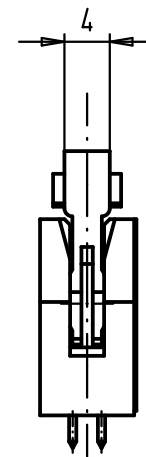


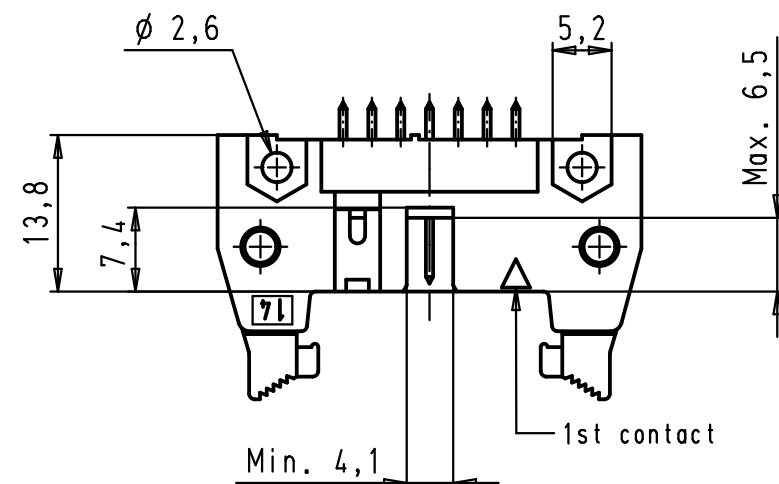

PCB layout, component side

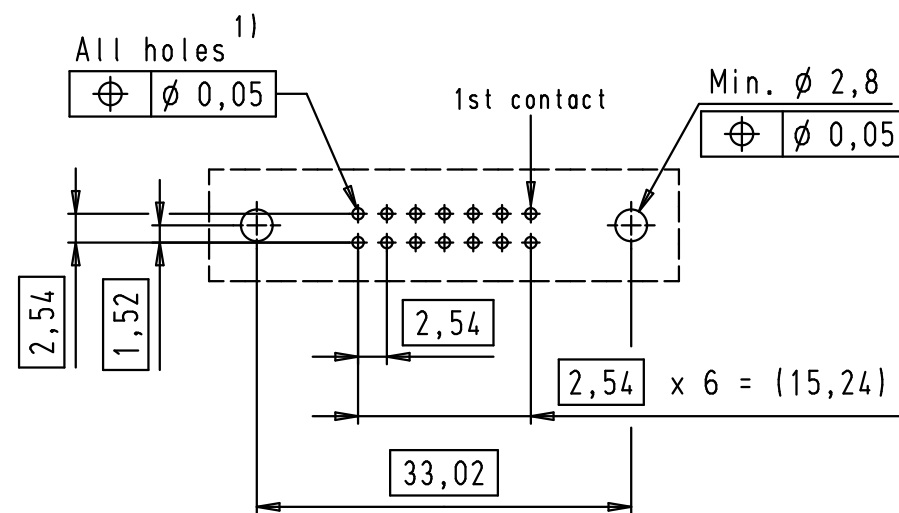

1) Solder pins for PCB connections
 $\varnothing 1 \pm 0,1$ according to IEC 60 326-3

09 18 514 7912	3	4,5
09 18 514 6912	2	4,5
09 18 514 5912	0,76 $\mu\text{m Au}$	4,5
09 18 514 7914	3	2,9
09 18 514 6914	2	2,9
09 18 514 5914	0,76 $\mu\text{m Au}$	2,9
Part number	Performance level	a

				Dat.	Name	 All Dim. in mm Orig. Size DIN A 3	SEK 18 Male Connector Standard 14 poles Straight solder pins Short locking levers	Maßstab/ Scale 1,5:1
			Detail.	01/12/99	JB			
			Insp.					
34900	29/01/08	LP	Stand.					
27931	15/06/00	JB	HARTING EURL F-95972 Paris				TB 09 18 514 X91X	Blatt/ Page 1 / 2
26554	01/12/99	JB						
Mod.	Dat.	Name						

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[HARTING:](#)

[09185147914](#)