
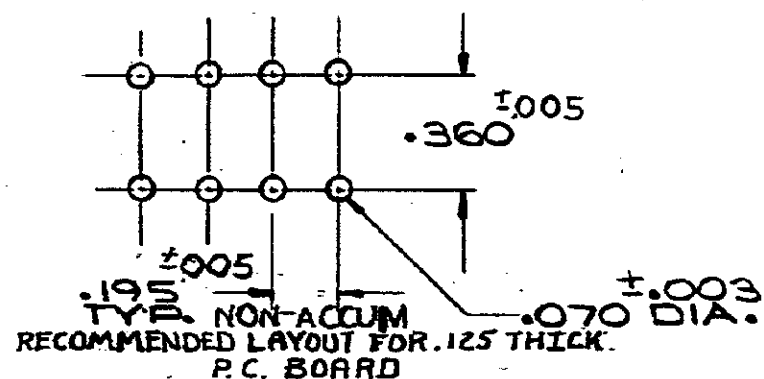


S

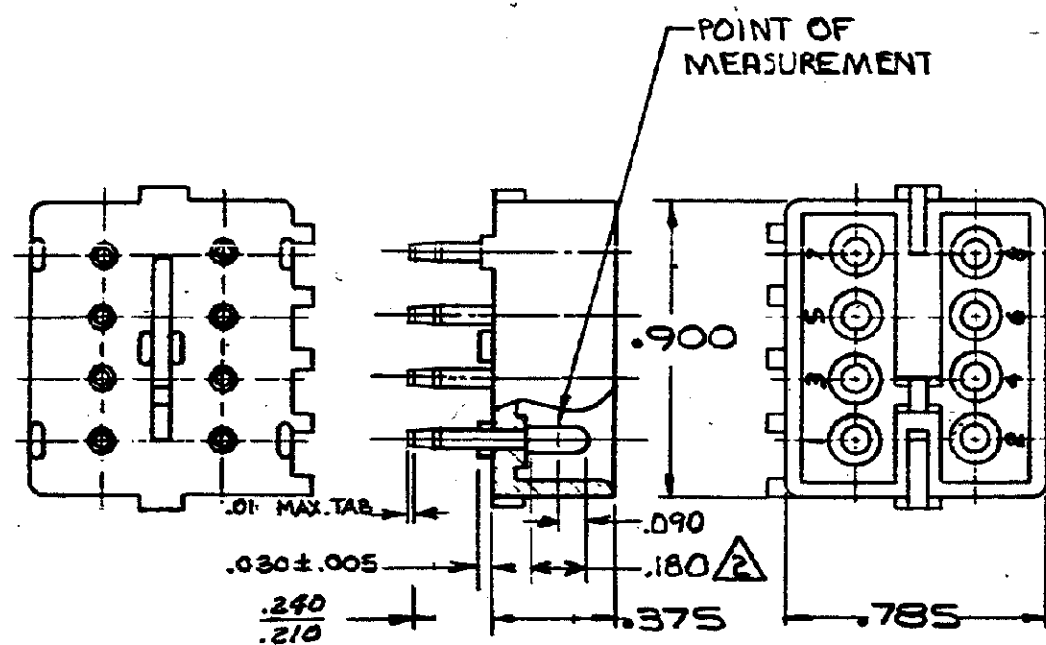

1. PARTS COMPLY WITH AMP SOLDERABILITY

SPEC. NO. 109-11-3

2 CONTACT IS PLATED OVERALL WITH .000050 NICKEL, THEN .000030 GOLD OVER CONTACT LENGTH INDICATED AND MATTE TIN ON SOLDER TAIL END.

3 OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

OBSOLETE

| ASSEMBLY NO. | HGS. MATL. - COLOR | FIN MATL. - FINISH     |
|--------------|--------------------|------------------------|
| 350426-2     | NYLON - NATURAL    | COPPER ALLOY - GOLD    |
| 350426-11    | NYLON - NATURAL    | COPPER ALLOY - PRE-TIN |

PRINT DIST  
53

AMP 1253 REV 11/65

|     |                       |    |     |       |
|-----|-----------------------|----|-----|-------|
| L2  | REV PER ECO-10-000445 | KK | AEG | 09JAN |
| LTR | REVISION RECORD       | DR | CHK | DATE  |

|                                                                                                             |  |
|-------------------------------------------------------------------------------------------------------------|--|
| DWG SIZE<br>NUMBER<br>NAME<br>REMARKS<br>ITEM NO.                                                           |  |
| REQUIRED PER ASSEMBLY<br>350426                                                                             |  |
| © 1978 BY AMP INCORPORATED. ALL RIGHTS RESERVED.<br>AMP PRODUCTS COVERED BY PATENTS AND/OR PATENTS PENDING. |  |
| MATERIAL AND FINISH<br>SEE TABLE                                                                            |  |
| WIRE - GAGE - INSULATION<br>TOLERANCE EXCEPT AS NOTED<br>SCALE<br>LOC<br>NO<br>350426                       |  |
| NAME<br>8 CIRCUIT MATE-N-LOK<br>P.C. BOARD PIN HEADER                                                       |  |