

NOTES:

1. ELECTRICAL:
- A. IMPEDANCE: 75 OHM


B. FREQUENCY RANGE: DC TO 3 GHz

C. VSWR(RETURN LOSS): 1.1, MAX.


D. DIELECTRIC WITHSTANDING VOLTAGE: 1500 VRMS, MIN.
2. MECHANICAL:
- A. DURABILITY: 500 CYCLES MIN.

B. TEMPERATURE RANGE: -65°C TO +165°C

REV.	DATE	ECR NO.	DESCRIPTION
NC	11/03/11	XXXXXX	INITIAL RELEASE

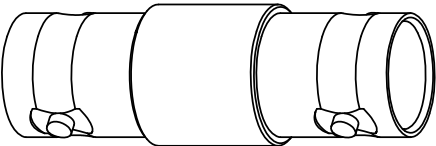

SCALE 1.000

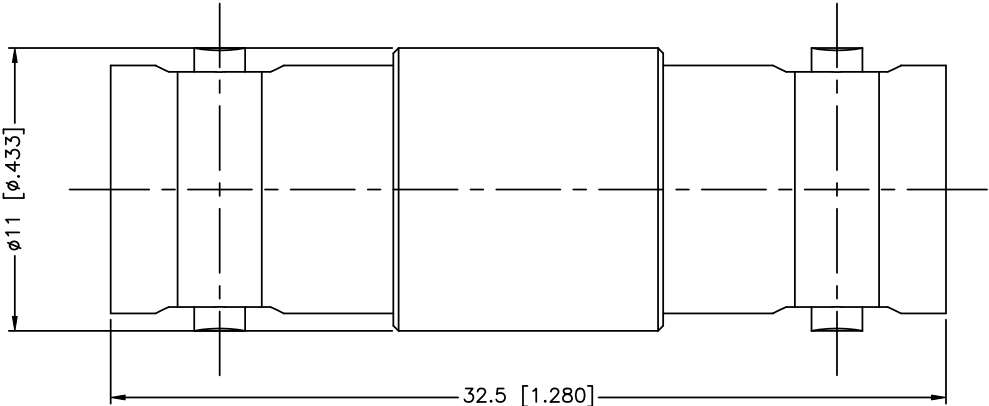

4	LOCK RING	BRASS	NICKEL	1
3	CONTACT PIN	PHOSPHOR BRONZE	GOLD	2
2	INSULATOR	PTFE	NATURAL	1
1	BODY	BRASS	NICKEL	1
	DESCRIPTION	MATERIAL	FINISH	QTY

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY.
UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 - 8mm ± 0.20mm 8 - 30mm ± 0.40mm 30 - 120mm ± 0.50mm
UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 - .315 = ± 0.007" .315 - 1.180 = ± 0.015" 1.180 - 4.724 = ± 0.020"
DO NOT SCALE DRAWING

APPROVALS	DATE
DRAWN T.DENG	11/03/11
CHECKED	
ISSUED	
SHEET 1 OF 1	
CAD FILE C:/CONNEX/112992.DWG	

Amphenol Connex			
PART DESCRIPTION			
BNC JACK TO JACK ADAPTOR			
PART NO.			
112992			
DWG. NO.	112992.DWG	REV. NC	SCALE NA