



Copyright FCI.

A

B

C


D

A

B

C

D

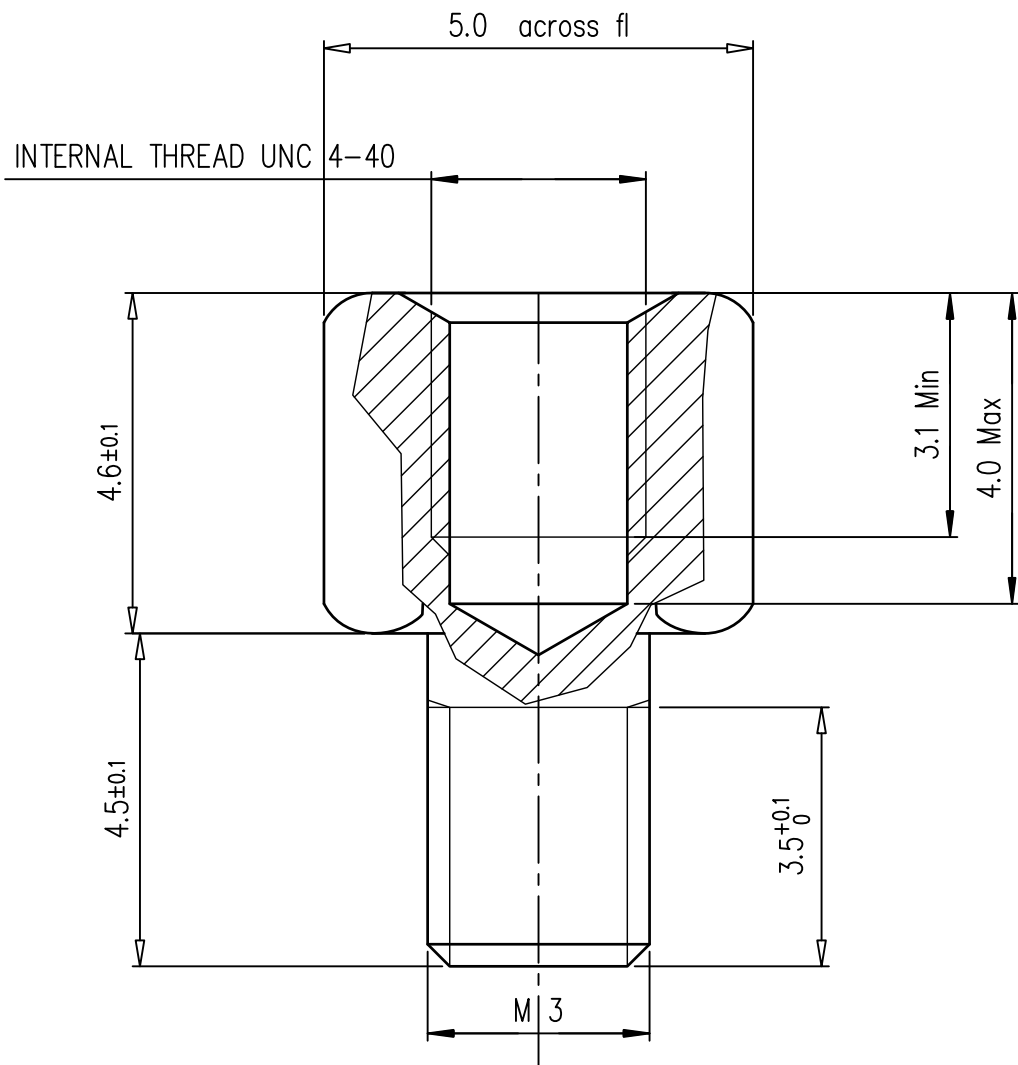

TECHNICAL CHARACTERISTICS :

Female screw locks: steel, tin plated .

Packaging : per 100 pieces .

Corrosion resistance : 50 hour exposure to salt spray .

NOTE:RoHS INFORMATIONS

- The "LF" products meet European union Directives and other country regulations as described in GS-22-008.
- Plating Sn (pure bright) over copper
- Packaging spec: see GS-14-920

Part number

86551167TLF

European Views

www.fciconnect.com			surface ISO 1302	✓	tolerance std ISO 406 ISO 1101	projection A3	mm
			TOLERANCES UNLESS OTHERWISE SPECIFIED			size	Scale
Dr	JOUBERT	1995/10/16	ANGULAR		0.X	±0.1	10
Eng	PESSON	1995/10/16		LINEAR	0.XX	±0.1	
Chr	ABHILASH	2011/01/25	0.XX	±2	0.XXX	±0.1	ECN I11-0022
Appr	SUDHIR	2011/01/25	Product family			D-SUB	Spec ref -
			title			FEMALE SCREW LOCKS	
			D SUB ACCESSORIES				
			catalog no			-	
						CUSTOMER	sheet 1 of 1

rev	ecn no	dr	date
B	-	JOU	1996/01/17
C	LS05-0026	MPE	2005/07/08
D	LS06-0097	LGO	2006/07/28
E	LS09-0006	PCR	2009/01/08
F	I11-0022	AMR	2011/01/25
-	-	-	-
-	-	-	-