

Strippers, Cutters & Crimpers

Manufactured with the needs of the professional tool user in mind, Klein strippers, cutters, and crimpers are designed to get jobs done with precision and quality.

F O R P R O F E S S I O N A L S . . . S I N C E 1 8 5 7 ®



Strippers, Cutters & Crimpers



Wire Strippers/Cutters

Features:



Wire Strippers/Cutters KLEIN-KURVE®

Additional Features:

- Easy-to-read markings.
- Precision shear-type blades.
- Cleanly shears 6-32 and 8-32 screws.



11055

Cat. No.	Handle Color	Overall Length	Strips and Cuts	Screw Shearing	Weight (lbs.)
11053	blue/red	7-1/8" (181 mm)	6 – 12 AWG stranded (10 mm ² – 2.5 mm ²)	6-32 & 8-32	.34
11055	blue/yellow	7-1/8" (181 mm)	10 – 18 AWG solid (4.0 mm ² – .75 mm ²) & 12 – 20 AWG stranded (2.5 mm ² – .50 mm ²)	6-32 & 8-32	.34
11057	blue/red	7-1/8" (181 mm)	20 – 30 AWG solid (.50 mm ² – .14 mm ²) & 22 – 32 AWG stranded (.34 mm ² – .05 mm ²)	6-32 & 8-32	.32

Dual NM Cable Strippers/Cutters KLEIN-KURVE®

Additional Features:

- 10/2, 12/2, and 14/2 stripping slots quickly remove outer jacket of Type NM-B nonmetallic-sheathed cable.
- Stripping holes easily remove insulation on 10, 12, and 14 AWG lead wire.
- Precision staggered blades for square, clean cuts on solid copper wire.
- Narrow nose fits into tight places.
- Precision shear-type blades for square, clean cuts on solid copper wire.



K1412

Cat. No.	Handle Color	Overall Length	Strips and Cuts	Type NM-B Cable	Screw Shearing	Weight (lbs.)
K1210	yellow/orange	7-3/4" (197 mm)	10 & 12 AWG solid (4.0 mm ² & 2.5 mm ²)	10/2 & 12/2	6-32 & 8-32	.43
K1412	yellow/white	7-3/4" (197 mm)	12 & 14 AWG solid (2.5 mm ² & 1.5 mm ²)	12/2 & 14/2	6-32 & 8-32	.41

All dimensions are in inches and (millimeters).

⚠WARNING: NOT insulated. Plastic-dipped or slip-on plastic handles are NOT intended for protection against electrical shock.

⚠WARNING: Never use on or near live electrical circuits.

⚠WARNING: Always wear approved eye protection.



Dual NMD-90 Cable Strippers/Cutters KLEIN-KURVE®


Additional Features:

- Quickly removes outer jacket of **Canadian** NMD-90 Romex® Cable.
- Strips, cuts, and loops 12 & 14 AWG solid wires.
- Strips, cuts, and loops 14 & 16 AWG stranded wires.
- Cleanly shears 6-32 and 8-32 screws.
- Serrated nose bends, shapes and pulls wire.
- Double-dipped comfort grips with curved handles.



SOLID
12 - 14 AWG

STRANDED
14 - 16 AWG



K1412CAN

Cat. No.	Handle Color	Overall Length	Strips and Cuts	Type NMD-90 Cable	Screw Shearing	Weight (lbs.)
K1412CAN	yellow/white	7-3/4" (197 mm)	12 & 14 AWG solid (2.5 mm ² & 1.5 mm ²) 14 & 16 AWG stranded (1.5 mm ² & 1.0 mm ²)	12/2 & 14/2	6-32 & 8-32	.41

Romex® is a registered trademark of Southwire Company.

QTR-Turn™ NM Cable Stripper/Cutter KLEIN-KURVE®

Additional Features:

- Exclusive QTR-Turn™* technology to quickly remove outer jacket of NM Cable.
- Strips, cuts, and loops 12 & 14 AWG solid wire.
- Cleanly shears 6-32 and 8-32 screws.
- Serrated nose bends, shapes, and pulls wire.



SOLID
12 & 14 AWG



K1412-3

Cat. No.	Handle Color	Overall Length	Strips and Cuts	Type NM Cable	Screw Shearing	Weight (lbs.)
K1412-3	yellow/blue	7-3/4" (197 mm)	12 & 14 AWG solid (2.5 mm ² & 1.5 mm ²)	12/3 & 14/3	6-32 and 8-32	.41

QTR-Turn™ is a trademark of Stride Tool Incorporated.

Bent Nose NM Cable Stripper/Cutters KLEIN-KURVE®

Additional Features:

- Patented 90° bent nose for easy work in confined spaces.
- Quickly removes outer jacket of Romex® Cable.
- Strips, cuts, and loops 10, 12 or 14 AWG solid wires.
- Cleanly shears 6-32 & 8-32 screws.
- Serrated nose bends, shapes, and pulls wire.



SOLID



K90-12/2

Cat. No.	Handle Color	Overall Length	Strips and Cuts	Type NM Cable	Screw Shearing	Weight (lbs.)
K90-10/2	yellow/orange	7-3/8" (187 mm)	10 AWG solid (4.0 mm ²)	10/2	6-32 and 8-32	.41
K90-12/2	yellow/yellow	7-3/8" (187 mm)	12 AWG solid (2.5 mm ²) & 18 AWG stranded (1.0 mm ²)	12/2	6-32 and 8-32	.41
K90-14/2	yellow/white	7-3/8" (187 mm)	14 AWG solid (1.5 mm ²) & 18 AWG stranded (1.0 mm ²)	14/2	6-32 and 8-32	.41

Romex® is a registered trademark of Southwire Company.

All dimensions are in inches and (millimeters).

⚠WARNING: NOT insulated. Plastic-dipped or slip-on plastic handles are NOT intended for protection against electrical shock.

⚠WARNING: Never use on or near live electrical circuits.

⚠WARNING: Always wear approved eye protection.



Wire Strippers/Cutters

Features:



Wire Strippers/Cutters

Additional Features:

- Compact, lightweight wire-stripping and cutting tools.
- Narrow nose fits into tight places.
- Hardened steel with precision ground stripping holes.
- Do not use for cutting steel wire or bolts.



11045

Cat. No.	Handle Color	Overall Length	Strips and Cuts	Weight (lbs.)
11045	yellow	6-1/4" (159 mm)	10 – 18 AWG solid (4.0 mm ² – .75 mm ²)	.27
11046	red	6-1/4" (159 mm)	16 – 26 AWG stranded (1.0 mm ² – .14 mm ²)	.27
11047	yellow	6-1/4" (159 mm)	22 – 30 AWG solid (.34 mm ² – .05 mm ²)	.27
11049	red	6-1/4" (159 mm)	8 – 16 AWG stranded (6 mm ² – 1.0 mm ²)	.27

Dual-Wire Stripper/Cutter

Additional Features:

- Strips two wires in a single motion.
- Paired stripping holes for 14 and 12 AWG solid wire.
- One stripping hole for 10 AWG solid wire.
- Shear-type cutting blades for square, clean cuts.
- Narrow nose fits into tight places.
- Hardened steel with precision ground stripping holes.



11048

Cat. No.	Handle Color	Overall Length	Strips and Cuts	Weight (lbs.)
11048	yellow	6-1/4" (159 mm)	10, 12, 14 AWG solid (4.0 mm ² , 2.5 mm ² , 1.5 mm ²)	.27



All dimensions are in inches and (millimeters).

⚠ WARNING: Never use on or near live electrical circuits.

⚠ WARNING: NOT insulated. Will NOT protect against electrical shock.

⚠ WARNING: Always wear approved eye protection.



Wire Stripper/Cutter – Solid and Stranded Wire

- Strips six standard wire sizes without nicking wire.
- Scissors action of 1/2" (13 mm) wide cutter makes clean cuts with little effort.
- Serrated nose jaws to bend, shape or pull wire; holes for looping wire ends.
- Spring-loaded for self-opening action.
- Comfortable, plastic-covered handles.

Cat. No.	Overall Length	Strips and Cuts	Handle Color	Weight (lbs.)
1011	6-1/8" (156 mm)	10 – 20 AWG solid & stranded (4.0 mm ² – .50 mm ²)	blue	.23



Adjustable Wire Strippers/Cutters – Solid and Stranded Wire

- A handy, light, compact tool for stripping insulation.
- Convenient hole for looping or bending wire.
- Black-oxide finish with plastic-dipped handles.
- Cuts, strips, and loops 12-26 solid and stranded wire.
- Adjustable slide stop with set screw for repeat stripping work.

Cat. No.	Hold-Open Spring	Overall Length	Strips and Cuts	Handle Color	Weight (lbs.)
1004	yes	5" (127 mm)	12 – 26 AWG solid & stranded (2.5 mm ² – 0.14 mm ²)	yellow	.18
1003	no	5" (127 mm)	12 – 26 AWG solid & stranded (2.5 mm ² – 0.14 mm ²)	yellow	.14



Adjustable Wire Stripper – Solid and Stranded Wire

- Simply dial desired wire size for fast, easy stripping.
- Adjustable tool makes short work of cutting and stripping operations.
- Finely honed nose cutter easily gets into tight areas.
- Wire gauge dial sets stripping dies to proper size, helps prevent nicked wire.
- Black-oxide finish with plastic-dipped handles.
- Spring-loaded design – tool opens automatically after each action.

Cat. No.	Overall Length	Strips and Cuts	Handle Color	Weight (lbs.)
74007	5-1/8" (130 mm)	12 – 24 AWG solid & stranded (2.5 mm ² – .25 mm ²)	yellow	.15



Katapult® Wire Stripper – 8-22 AWG KATAPULT®

- Quick and easy 8-22 AWG wire stripping.
- Compound action wire stripping: grip and strip via single action squeezing motion.
- Precision machined stripping holes easily remove jacket insulation without damaging the wire.
- Remove up to 1" (24mm) in length of the insulation layer (jacket layer) in a single step.
- Tension loaded wire-grip gently holds the cable in place while retaining the cable geometry.
- Recoil spring design returns tool to ready position upon cycle completion.
- Cast alloy chassis with heavy-duty Ecoat finish for corrosion resistance and durability.
- Katapult® Coaxial Cable Stripper – RG6 (Cat. No. VDV110-045) is also available.
- Additional precision machined steel cutting blades available.

Cat. No.	Color	Strips	Overall Length	Weight (oz.)
11063	blue/black	8-22 AWG (6 mm ² – .34 mm ²)	6.6" (168 mm)	12.1

Wire Stop/Gauge

11081	adjustable wire stop	.01
-------	----------------------	-----



Cat. No.	Weight (oz.)
Replacement Blades Sets	
VDV110-046	RG6 coaxial cable replacement blades .01
11073	8 – 22 AWG wire stripping blades .01
11074	16 – 26 AWG (1.0 mm ² – .14 mm ²) .01

All dimensions are in inches and (millimeters).

⚠WARNING: NOT insulated. Plastic-dipped or slip-on plastic handles are NOT intended for protection against electrical shock.

⚠WARNING: Never use on or near live electrical circuits.


⚠WARNING: Always wear approved eye protection.



Combination Wire-Stripping and Cutting Tools

Multi-Purpose 6-in-1 Tool

- Cleanly shears bolts.
- Easily cuts and strips wire.
- Measures stud sizes.
- Gauges wire sizes.
- Crimps insulated terminals.
- Plastic-covered cushioned handles for comfort.

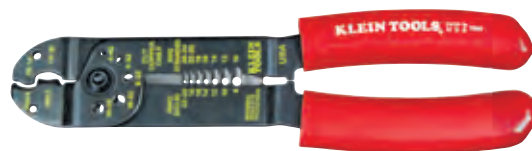

1000

Cat. No.	Overall Length	Strips and Cuts	Bolt Sizes	Handle Color	Weight (lbs.)
1000	7-3/4" (197 mm)	10 – 22 AWG (4.0 mm ² – .34 mm ²)	4-40, 6-32, 8-32, 10-24, 10-32	red	.44

Multi-Purpose Electrician's Tool – 8-22 AWG

- Two wire cutters—one at tip, the other halfway back near stripping holes—double the utility of this tool.
- Color-coded crimping dies for 10-22 AWG insulated and non-insulated terminals.
- Cleanly shears bolts.
- Pivot nut adjusts tension.
- Wire-looping holes near tip.
- Full-sized, plastic-covered cushioned handles for comfort.



1001

SOLID
8 – 18 AWG

STRANDED
10 – 22 AWG

Cat. No.	Overall Length	Strips and Cuts	Bolt Sizes	Handle Color	Weight (lbs.)
1001	8-1/2" (216 mm)	8 – 18 AWG solid (6.0 mm ² – 1.0 mm ²) 10 – 22 AWG stranded (4.0 mm ² – .34 mm ²)	4-40, 6-32, 8-32, 10-24, 10-32	red	.47

Long-Nose Multi-Purpose Tool

- Easily cuts and strips wire.
- Narrow, serrated pliers nose to pull, loop, and bend wire.
- Long, curved cutting blade.
- Cutters and strippers are in front of the pivot for maximum ease-of-use in reaching into tight places.
- Crimps insulated and non-insulated terminals and 7 to 8 mm ignition terminals.
- Cleanly shears bolts.
- Plastic-covered cushioned handles for comfort.



1010

Cat. No.	Overall Length	Bolt Sizes	Strips and Cuts	Connectors	Handle Color	Weight (lbs.)
1010	8-1/4" (210 mm)	4-40, 5-40, 6-32, 8-32, 10-32, 10-24	10 – 22 AWG (4.0 mm ² – .34 mm ²)	10 – 22 gauge	blue	.43

Trip-Saver®

- Unique multi-tool addresses the special needs of electricians and maintenance professionals while providing many other features handy on any job.
- Compact, lightweight, and very sturdy.
- Produced from high-carbon, rust-resistant stainless steel.
- Specially designed locking "L" handle snaps securely into the "L" channel, locking the fully opened blade or implement in place during use.
- Features the following:
Needle-Nose Pliers, Beveled Wire Cutter, Toothed Pipe Grippers, Files (coarse and fine), 5-Slot Wire Stripper (10-18) AWG, Wire-Looping Hole, Scraper, Awl/Reamer, Serrated Sheepfoot Knife, Clip-Point Knife, Standard/Metric Ruler, Drywall Saw, Locking "L" Handle, #1 and #2 Phillips Hex Bits, Small-Slotted Hex Bit, Large-Slotted Hex Bit, 1/4" Socket Adapter, Lanyard Hole, Nylon Pouch.



1016

Cat. No.	Overall Length	Weight (lbs.)
1016	5-3/4" (143 mm)	.95

⚠WARNING: Close handles to lock blade in place before use.

⚠WARNING: Never use on or near live electrical circuits.

⚠WARNING: Always wear approved eye protection.

All dimensions are in inches and (millimeters).

⚠WARNING: NOT insulated. Plastic-dipped or slip-on plastic handles are NOT intended for protection against electrical shock.

NM Cable Ripper

- Easy-to-use cable ripper.
- Slit the outer jacket of Romex® cable (all sizes) and other nonmetallic (type NM) sheathed cable.
- Measure conductor wire gauge.



74017


Cat. No.	Overall Length	Slits	Measures Wire Gauge	Weight (lbs.)
74017	4" (102 mm)	all sizes of Romex® and NM	8 – 14 AWG (6 mm² – 1 mm²)	.08

Romex® is a registered trademark of Southwire Company.

Crimping Tools

Crimping/Cutting Tools – Non-Insulated/Insulated Terminals

- Crimping die marked for insulated and non-insulated solderless terminals and connectors.
- Tapered nose design for working in confined spaces.
- Specially hardened wire cutter in nose.
- Hot-riveted joint for smooth action and no handle wobble.



1005

Cat. No.	Handle Color	Crimps	Overall Length	Weight (lbs.)
1005	red	10 – 22 AWG	9-3/4" (248 mm)	.80
Journeyman Series – Dual-material handles				
J1005	red/black	10 – 22 AWG	9-3/4" (248 mm)	.84

Crimping/Cutting Tool – Non-Insulated Terminals

- Designed for crimping non-insulated solderless terminals and connectors.
- Specially hardened wire cutter in nose.
- Tapered nose for working in confined spaces.
- Plastic-dipped cushioned handles for comfort.



1006

Cat. No.	Handle Color	Crimps	Overall Length	Weight (lbs.)
1006	black	10 – 22 AWG	9-3/4" (248 mm)	.85

Large Crimp Tool – Compound-Action

- Crimps #6-4/0 AWG battery lugs and terminals.
- Ultra-comfortable hand grips for easy use.
- All-in-one, integral crimp nest. No removable parts or rotating dies.
- High-leverage handles and compound-action mechanism for superior mechanical advantage.
- Adjustment screw allows user to control crimp depth.



2006

Cat. No.	Crimps	Handle Color	Overall Length	Weight (lbs.)
2006	#6 – 4/0 AWG battery lugs and terminals	red	19-1/2" (495 mm)	3.80

All dimensions are in inches and (millimeters).

⚠WARNING: NOT insulated. Plastic-dipped or slip-on plastic handles are NOT intended for protection against electrical shock.

⚠WARNING: Never use on or near live electrical circuits.

⚠WARNING: Always wear approved eye protection.



Ratcheting Crimpers

Full-Cycle Ratcheting Crimper – Insulated Terminals

- Crimps insulated terminals in wire sizes 22-16 (front cavity), 16-14 (middle cavity), and 12-10 (rear cavity).
- Color-coded wire size markings.
- Compound lever-action of narrow-span handles puts more crimping power into each squeeze.
- Comfort-grip plastic handles.



T1715

Cat. No.	Handle Color	Crimps	Overall Length	Weight (lbs.)
T1715	black	10 – 22 AWG	9" (229 mm)	1.05

Compound-Action Ratcheting Crimper – Insulated Terminals

- Compound-action tool crimps 10-22 AWG insulated terminals to meet or exceed MIL-SPEC pull-out tests.
- Built-in ratchet with safety release assures uniform crimps every time.
- Compound lever-action of narrow-span handles puts more crimping power into each squeeze.
- Special locator quickly positions terminal for double crimp.
- Comfort-grip plastic handles.



T1710

Cat. No.	Handle Color	Crimps	Overall Length	Weight (lbs.)
T1710	black	10 – 22 AWG	9" (229 mm)	1.29

Full-Cycle Coax Ratcheting Crimper

- Crimps hex-configuration (in dimensions across flats) coaxial connectors.
- Dimensions clearly marked for quick identification.
- Front cavity (.262") for RG-59.
- Middle cavity (.324") for RG-5, 6, 21, 143, 212, 222, and 304, also for Belden 8281, 9231 and 9141.
- Rear cavity (.384") for RG-8, 9, 11, 149, and 213.
- Ratchet release allows quick removal of incorrectly placed connector prior to completing crimp.
- Compound lever-action of narrow-span handles puts more crimping power into each squeeze.
- Comfort-grip plastic handles.
- Tool jaws will not open until the crimp is completed. They release and open automatically when crimp is done.



T1720

Cat. No.	Handle Color	Hex Configurations	Overall Length	Weight (lbs.)
T1720	black	front cavity .262"; middle cavity .324"; rear cavity .384"	9" (229 mm)	1.30

All dimensions are in inches and (millimeters).

⚠WARNING: NOT insulated. Plastic-dipped or slip-on plastic handles are NOT intended for protection against electrical shock.

⚠WARNING: Never use on or near live electrical circuits.

⚠WARNING: Always wear approved eye protection.

