

S25SC6M

60V 25A

FEATURES

- $T_j 150^{\circ}\text{C}$
- P_{RRSM} avalanche guaranteed
- Small θ_{jc}
- High current capacity


APPLICATION

- Switching power supply
- DC/DC converter
- Home Appliances, Office Equipment
- Telecommunication

OUTLINE DIMENSIONS

Case : MTO-3P

Unit : mm

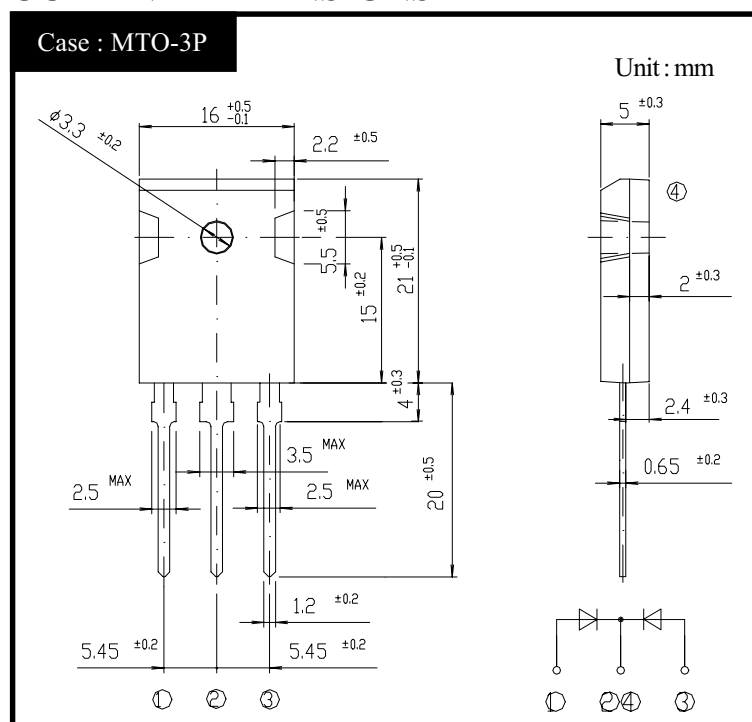

RATINGS

● Absolute Maximum Ratings (If not specified $T_c=25^{\circ}\text{C}$)


Item	Symbol	Conditions	Ratings	Unit
Storage Temperature	T_{stg}		-40~150	$^{\circ}\text{C}$
Operating Junction Temperature	T_j		150	$^{\circ}\text{C}$
Maximum Reverse Voltage	V_{RM}		60	V
Repetitive Peak Surge Reverse Voltage	V_{RRSM}	Pulse width 0.5ms, duty 1/40	65	V
Average Rectified Forward Current	I_O	50Hz sine wave, R-load, Rating for each diode $I_O/2$, $T_c=128^{\circ}\text{C}$	25	A
Peak Surge Forward Current	I_{FSM}	50Hz sine wave, Non-repetitive 1 cycle peak value, $T_j=125^{\circ}\text{C}$	300	A
Repetitive Peak Surge Reverse Power	P_{RRSM}	Pulse width 10 μ s, Rating of per diode, $T_j=25^{\circ}\text{C}$	660	W
Mounting Torque	TOR	(Recommended torque: 0.5N·m)	0.8	N·m

● Electrical Characteristics (If not specified $T_c=25^{\circ}\text{C}$)


Item	Symbol	Conditions	Ratings	Unit
Forward Voltage	V_F	$I_F=12.5\text{A}$, Pulse measurement, Rating of per diode	Max. 0.58	V
Reverse Current	I_R	$V_R=V_{RM}$, Pulse measurement, Rating of per diode	Max. 10	mA
Junction Capacitance	C_j	$f=1\text{MHz}$, $V_R=10\text{V}$, Rating of per diode	Typ. 490	pF
Thermal Resistance	θ_{jc}	junction to case	Max. 1.0	$^{\circ}\text{C/W}$

S25SC6M

Forward Voltage

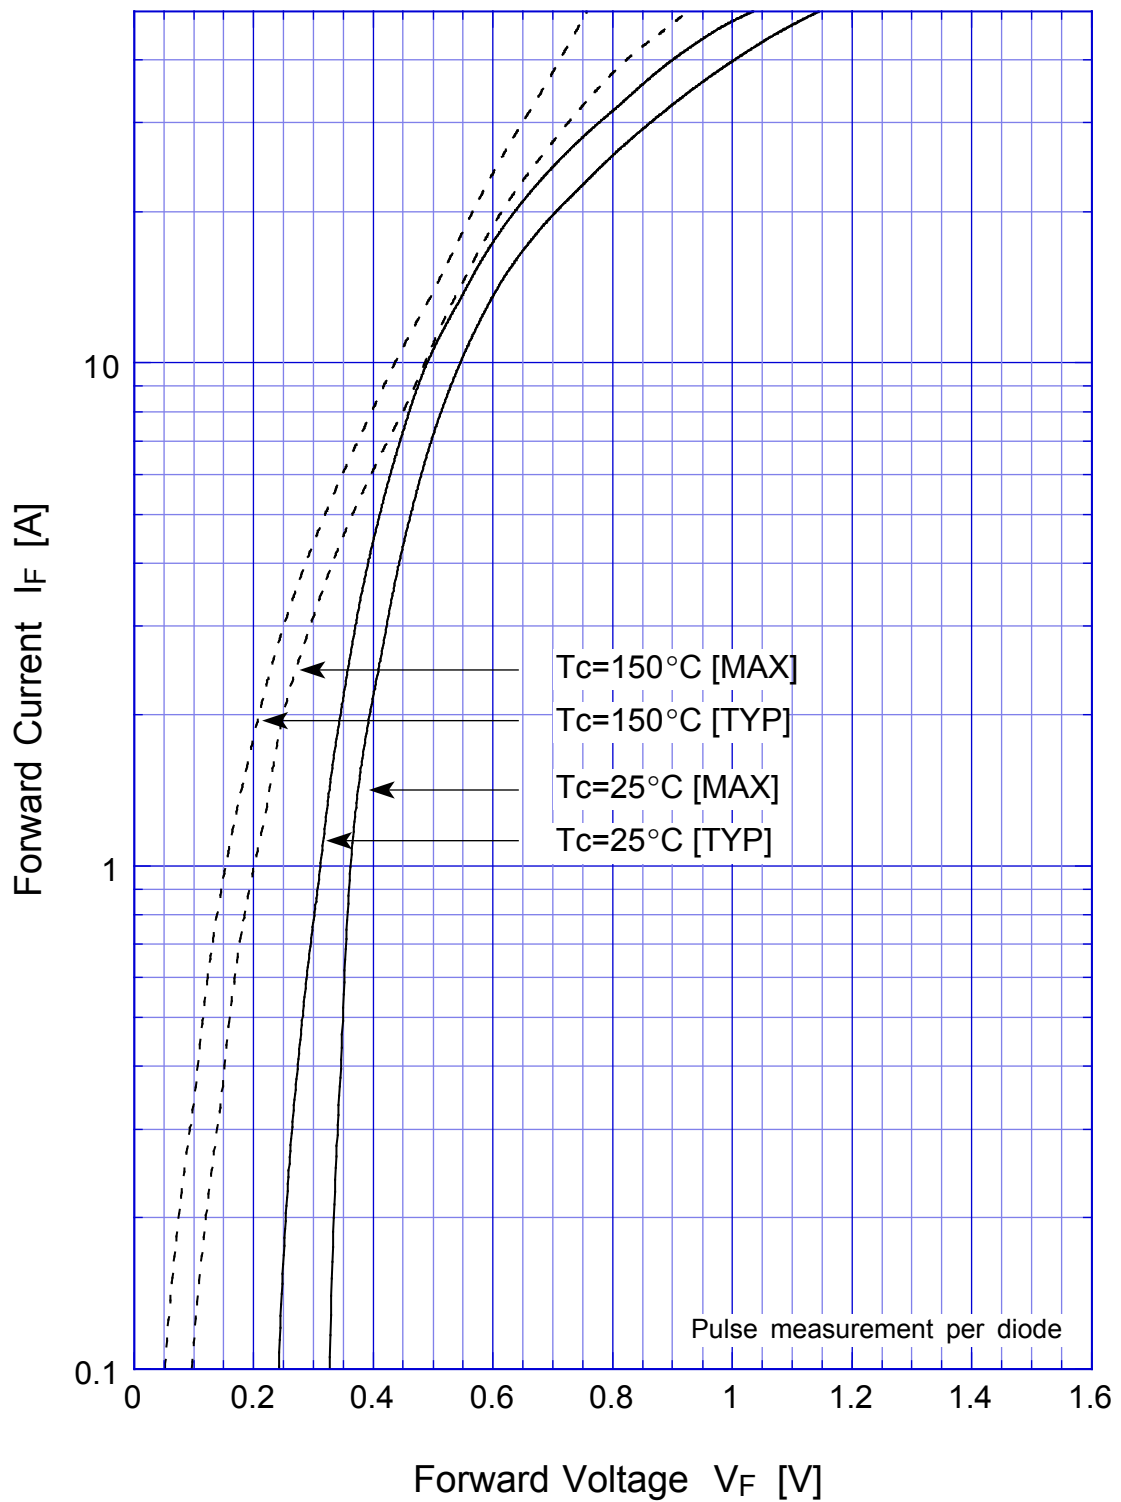


S25SC6M Junction Capacitance

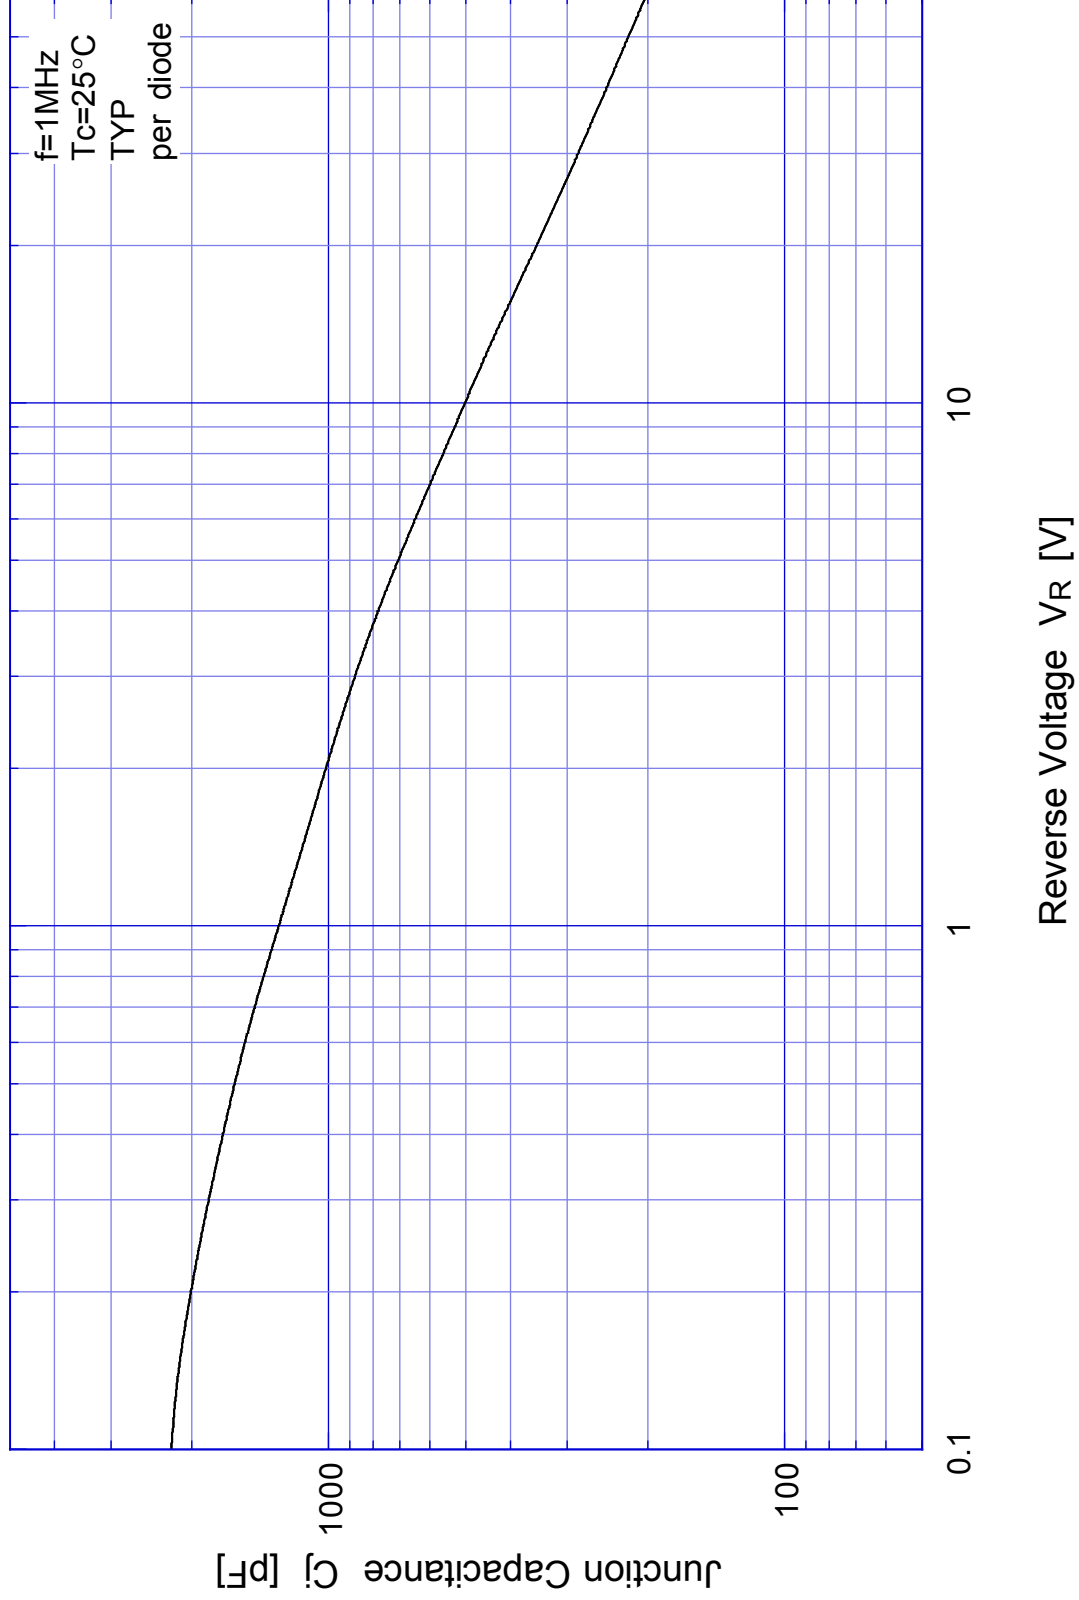


S25SC6M


Reverse Current

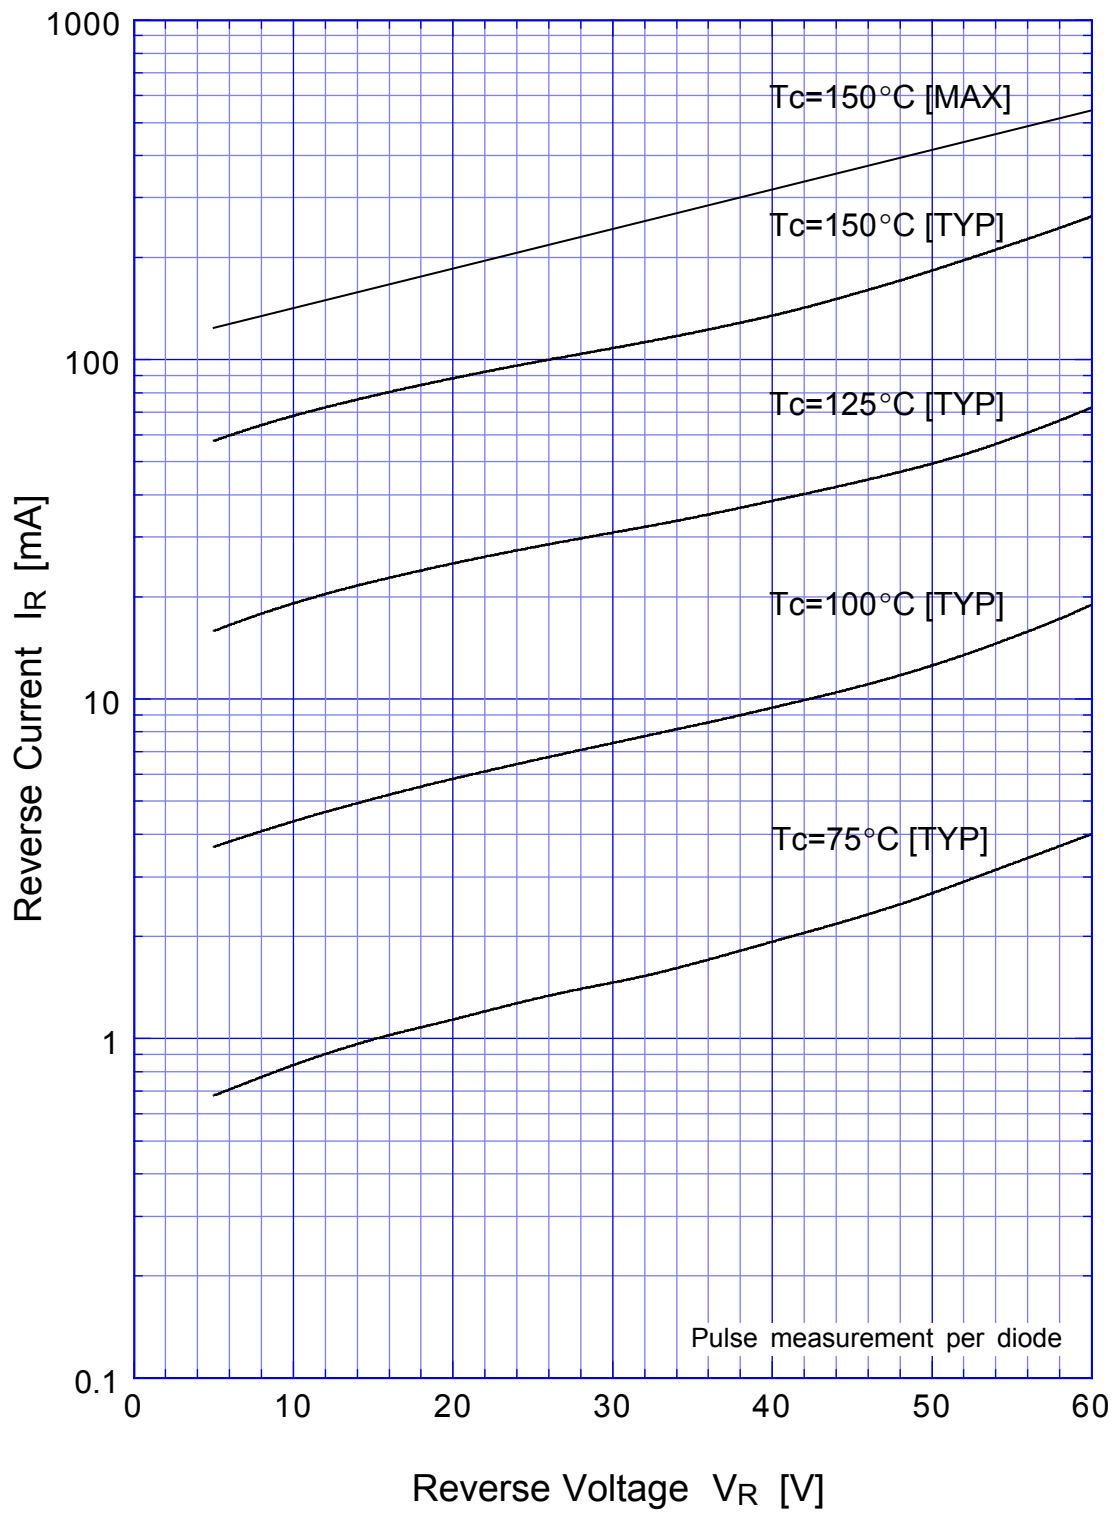


S25SC6M Reverse Power Dissipation

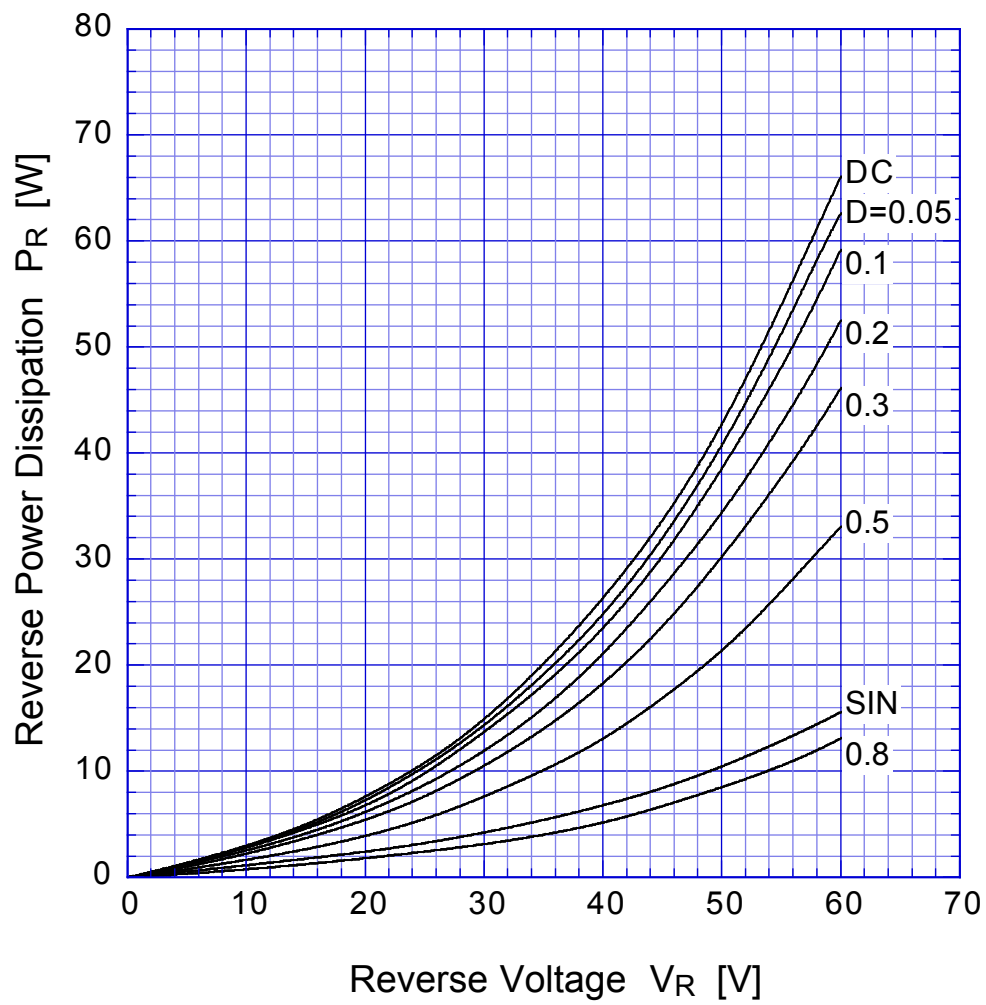


$T_j = 150^\circ\text{C}$

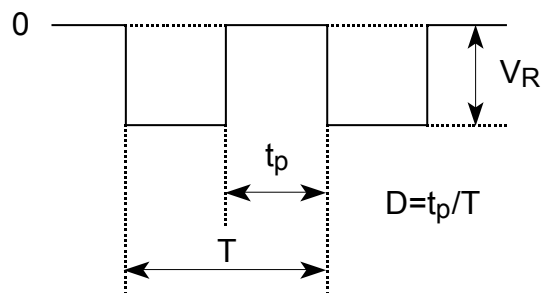

S25SC6M Forward Power Dissipation

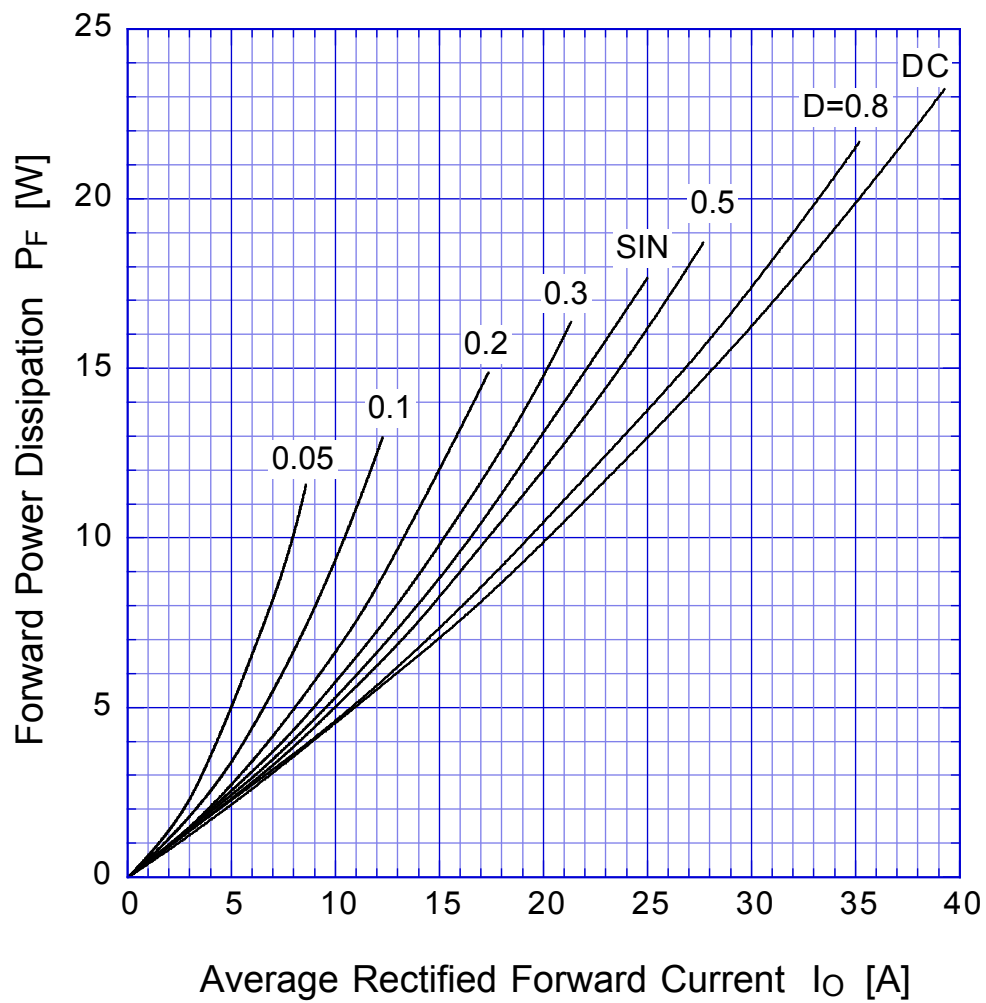


$T_J = 150^\circ\text{C}$

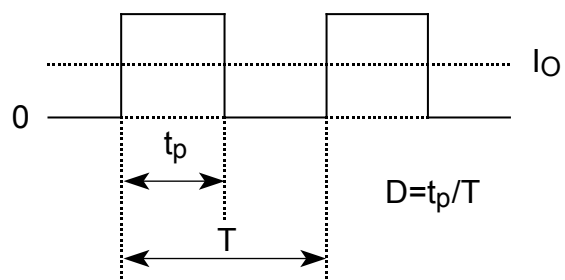


S25SC6M


Derating Curve

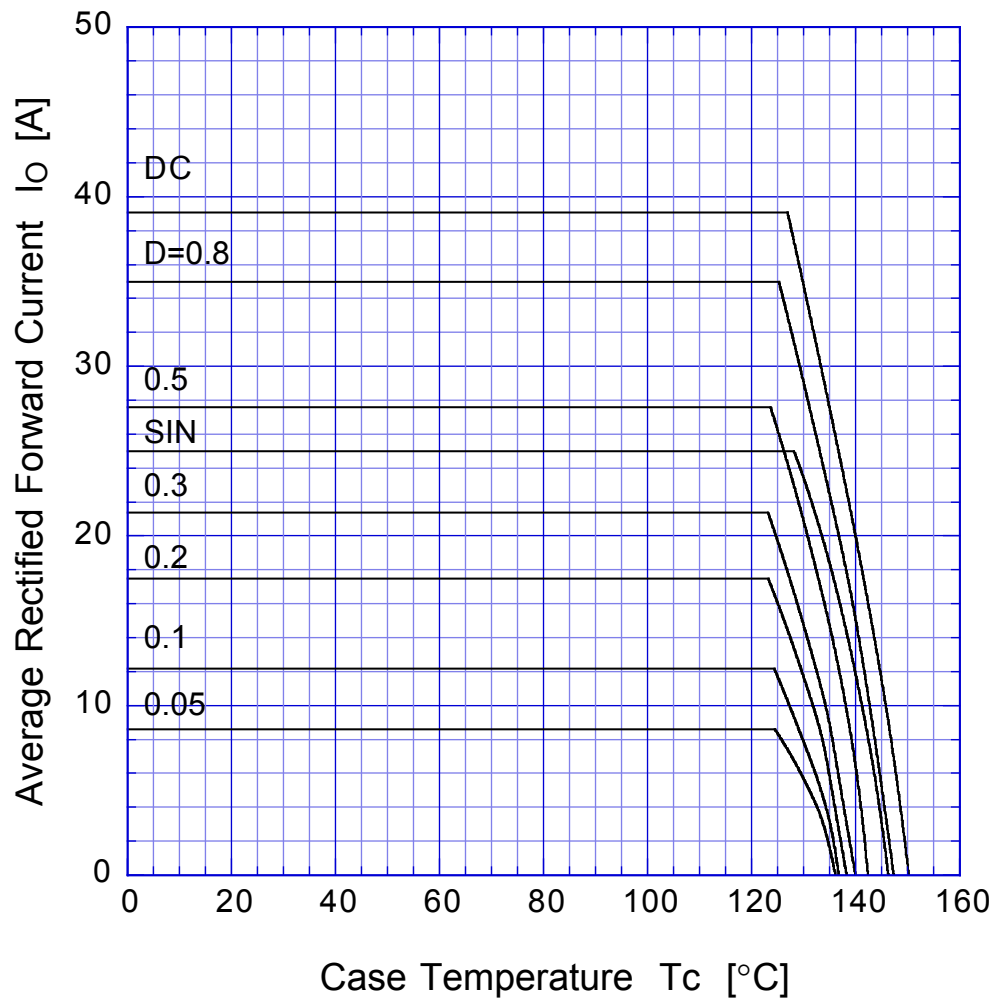

$V_R = 30V$

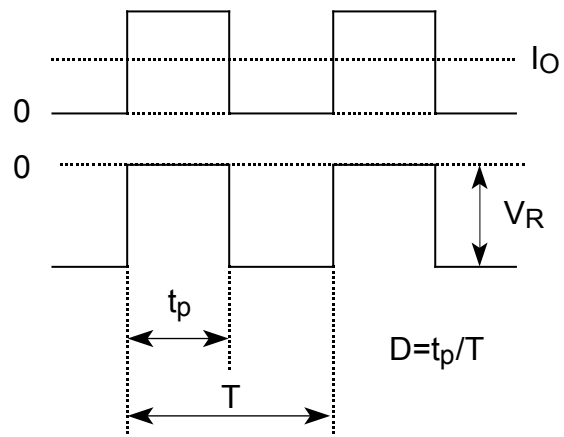

S25SC6M Peak Surge Forward Capability

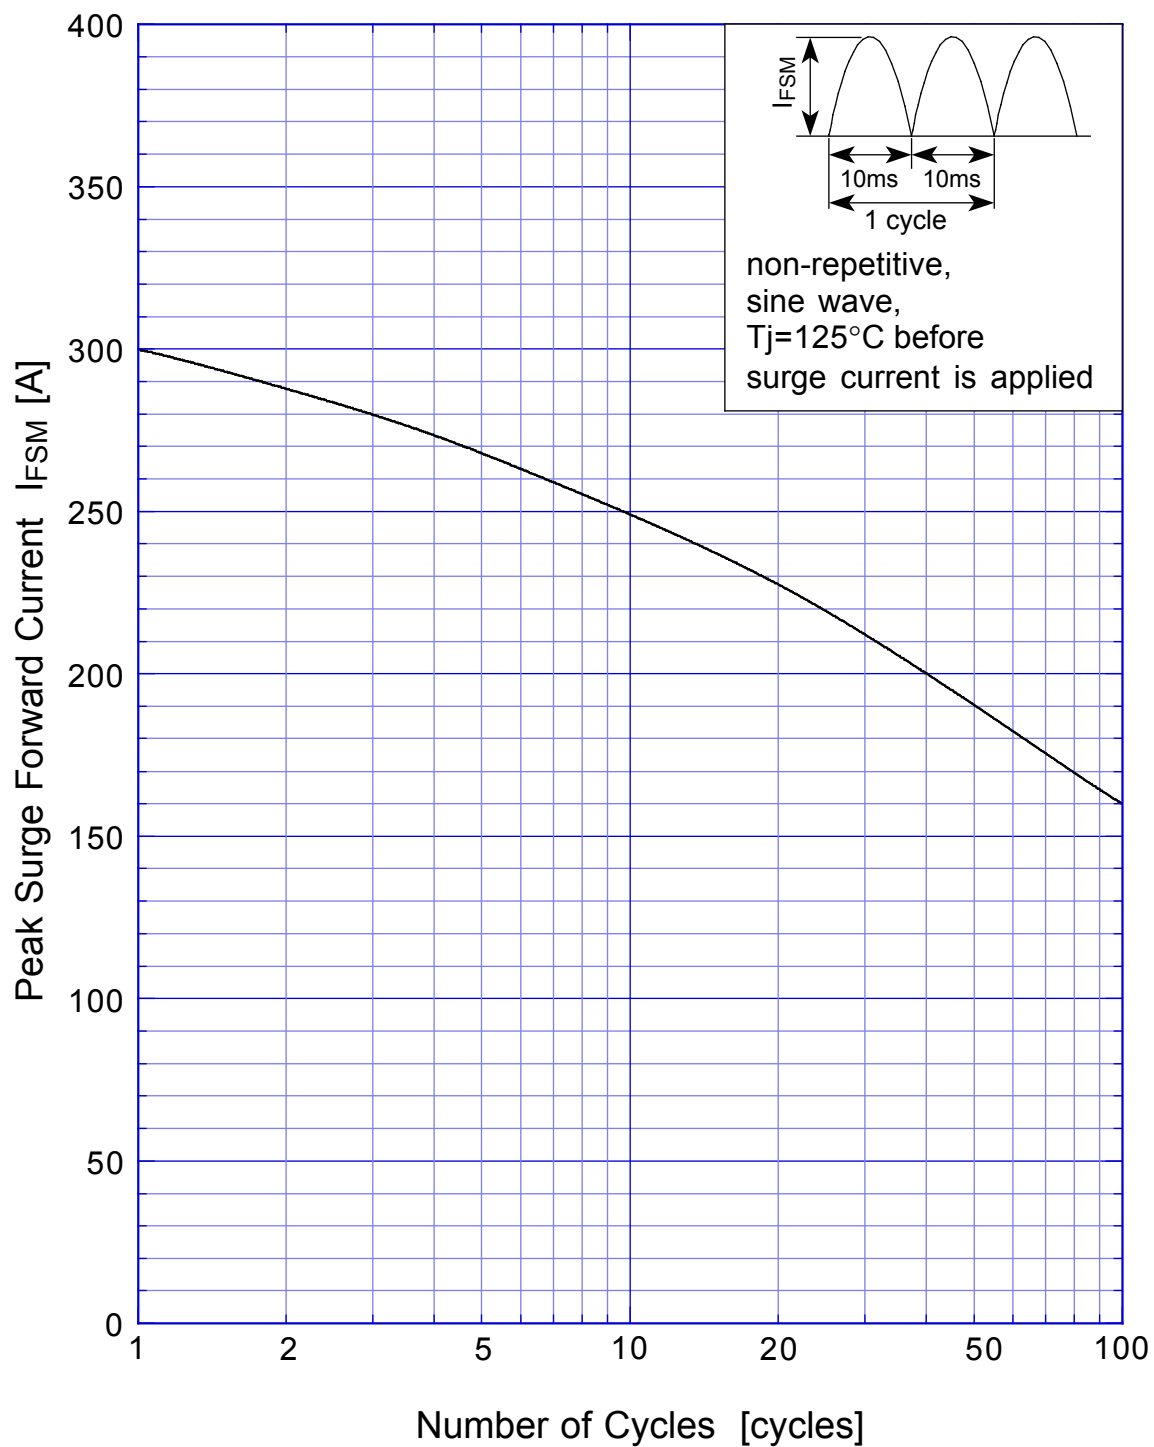

SBD Repetitive Surge Reverse Power Derating Curve

