

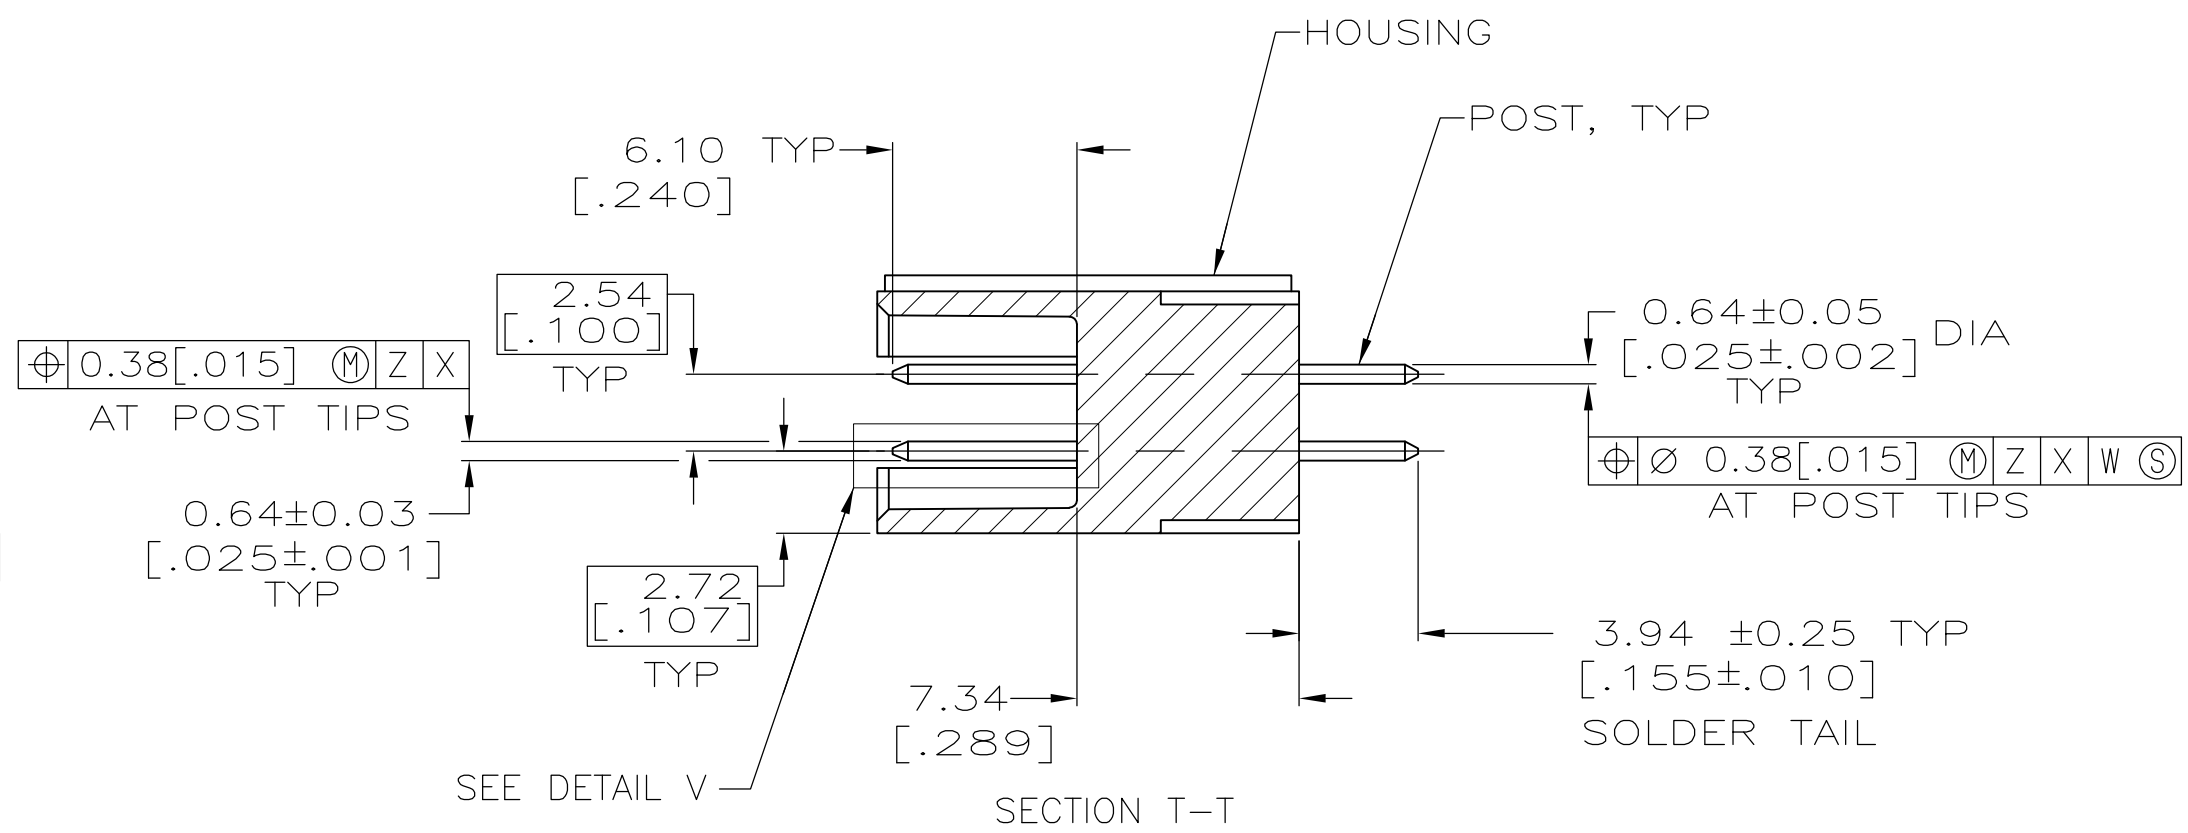


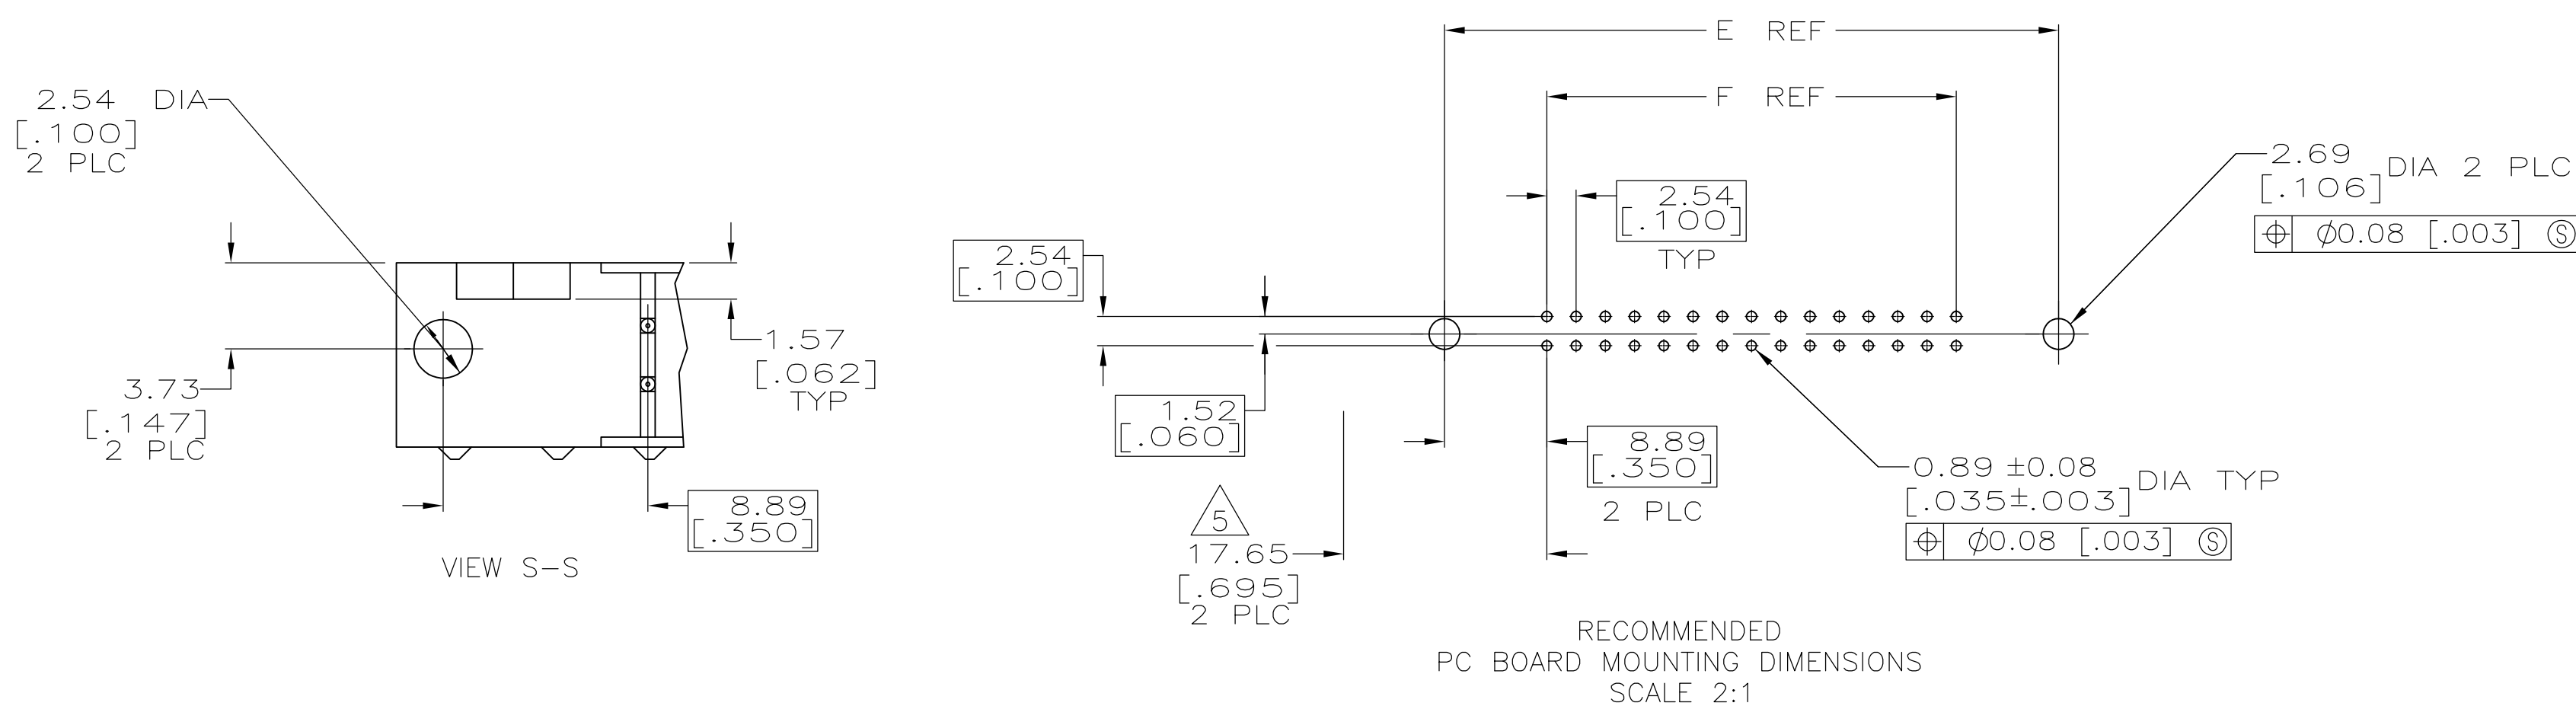

- ① COORDINATE DIMENSION APPLIES FROM BASIC LOCATION.
- ② 10 AND 14 POSITION SIZES CONTAIN ONLY ONE SLOT FOR SNAP-IN POLARIZER (MILITARY POLARIZATION) LOCATED AS SHOWN.
- ③ 10 POSITION SIZES CONTAIN ONLY ONE SLOT FOR DUAL POLARIZATION, LOCATED AS SHOWN.
4. RECOMMENDED PRINTED CIRCUIT BOARD THICKNESS IS 3.18 [.125].
- ⑤ DISTANCE REQUIRED BY EJECTION LATCHES IN THE OPEN POSITION.
- ⑥ POSTS:
GOLD FLASH OVER PALLADIUM-NICKEL PLATE, $0.38\mu\text{m}$ [.000015] MIN TOTAL ON THE LOCALIZED PLATE AREA,
 $2.54\mu\text{m}$ [.000100] MIN TIN-LEAD PLATE ON THE SOLDER-TAIL,
 $1.27\mu\text{m}$ [.000050] MIN NICKEL UNDERPLATE ON THE ENTIRE POST.
OR
 $0.38\mu\text{m}$ [.000015] MIN GOLD PLATE ON THE LOCALIZED PLATE AREA,
 $2.54\mu\text{m}$ [.000100] MIN TIN-LEAD PLATE ON THE SOLDER-TAIL,
 $1.27\mu\text{m}$ [.000050] MIN NICKEL UNDERPLATE ON THE ENTIRE POST.
- ⑦ MATERIAL:
HOUSING: GLASS FILLED NYLON OR POLYESTER, 94V-0 RATED, BLACK.
POSTS: PHOSPHOR BRONZE OR BRASS.

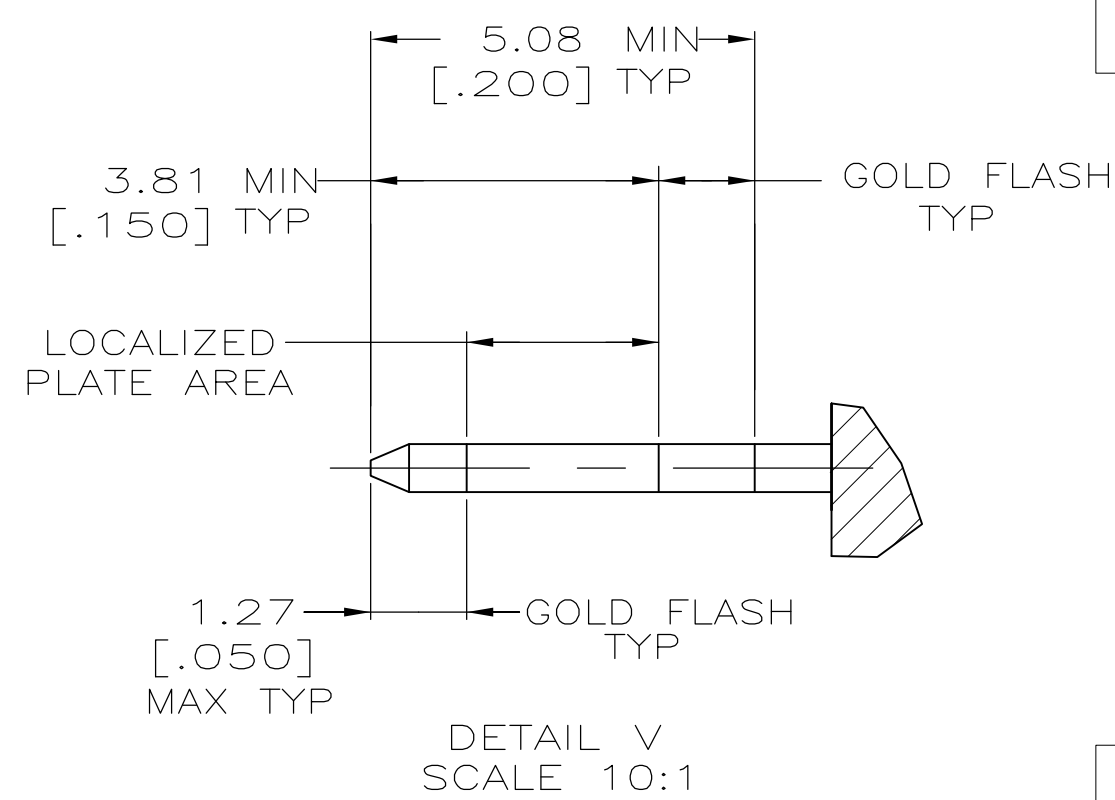

H	OBSELETE	53.34 [2.100]	71.12 [2.800]	65.02 [2.560]	75.18 [2.960]	71.12 [2.800]	60.96 [2.400]	44	1-499923-3
		78.74	96.52	90.42	100.58	96.52	86.36	64	1-499923-2
		3.100	3.800	3.560	3.960	3.800	3.400	60	1-499923-
		73.66	91.44	85.34	95.50	91.44	81.28	50	1-499923-0
		2.900	3.600	3.360	3.760	3.600	3.200	40	499923-9
		60.96	78.74	72.64	82.80	78.74	68.58	34	499923-8
		2.400	3.100	2.860	3.260	3.100	2.700	30	499923-7
		48.26	66.04	59.94	70.10	66.04	55.88	26	499923-6
		1.900	2.600	2.360	2.760	2.600	2.200	24	499923-5
		40.64	58.42	52.32	62.48	58.42	48.26	20	499923-4
		1.600	2.300	2.060	2.460	2.300	1.900	16	499923-3
		35.56	53.34	47.24	57.40	53.34	43.18	14	499923-2
		1.400	2.100	1.860	2.260	2.100	1.700	10	499923-1
		30.48	48.26	42.16	52.32	48.26	38.10		
OBSELETE		1.200	1.900	1.660	2.060	1.900	1.500		
		27.94	45.72	39.62	49.78	45.72	35.56	24	499923-5
		1.100	1.800	1.560	1.960	1.800	1.400	20	499923-4
OBSELETE		22.86	40.64	34.54	44.70	40.64	30.48	16	499923-3
		.900	1.600	1.360	1.760	1.600	1.200	14	499923-2
		17.78	35.56	29.46	39.62	35.56	25.40	10	499923-1
OBSELETE		.700	1.400	1.160	1.560	1.400	1.000		
		15.24	33.02	26.92	37.08	33.02	22.86		
		.600	1.300	1.060	1.460	1.300	.900	14	499923-2
		10.16	27.94	21.84	32.00	27.94	17.78	10	499923-1
		.400	1.100	.860	1.260	1.100	.700		
	F	E	D	C	B	A	NO OF POSN	PART NUMBER	

THIS DRAWING IS A CONTROLLED DOCUMENT.		OWN H. MOLL 4-23-90		Tyco Electronics Corporation Harrisburg, PA 17105-3608	
DIMENSIONS: mm [INCHES]		TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME	
		OWN R. STONE 11-28-90		Tyco Electronics Corporation	
		APPROVED		HEADER ASSY, UNIVERSAL, AMP-LATCH	
		PRODUCT SPEC		-	
		APPLICATION SPEC		-	
MATERIAL		FINISH		SIZE CAGE CODE DRAWING NO	
				A1 00779 C=499923	
				RESTRICTED TO	
				—	
CUSTOMER DRAWING					
				SCALE 4:1 SHEET 1 of 1 REV J	