

# TPS1101, TPS1101Y SINGLE P-CHANNEL ENHANCEMENT-MODE MOSFETS

SLVS079C – DECEMBER 1993 – REVISED AUGUST 1995


- Low  $r_{DS(on)}$  . . . 0.09  $\Omega$  Typ at  $V_{GS} = -10$  V
- 3 V Compatible
- Requires No External  $V_{CC}$
- TTL and CMOS Compatible Inputs
- $V_{GS(th)} = -1.5$  V Max
- Available in Ultrathin TSSOP Package (PW)
- ESD Protection Up to 2 kV per MIL-STD-883C, Method 3015

## description


The TPS1101 is a single, low- $r_{DS(on)}$ , P-channel, enhancement-mode MOSFET. The device has been optimized for 3-V or 5-V power distribution in battery-powered systems by means of the Texas Instruments LinBiCMOS™ process. With a maximum  $V_{GS(th)}$  of  $-1.5$  V and an  $I_{DSS}$  of only 0.5  $\mu$ A, the TPS1101 is the ideal high-side switch for low-voltage, portable battery-management systems where maximizing battery life is a primary concern. The low  $r_{DS(on)}$  and excellent ac characteristics (rise time 5.5 ns typical) of the TPS1101 make it the logical choice for low-voltage switching applications such as power switches for pulse-width-modulated (PWM) controllers or motor/bridge drivers.

The ultrathin thin shrink small-outline package or TSSOP (PW) version fits in height-restricted places where other P-channel MOSFETs cannot. The size advantage is especially important where board height restrictions do not allow for an small-outline integrated circuit (SOIC) package. Such applications include notebook computers, personal digital assistants (PDAs), cellular telephones, and PCMCIA cards. For existing designs, the D-packaged version has a pinout common with other P-channel MOSFETs in SOIC packages.


D PACKAGE  
(TOP VIEW)




D PACKAGE



PW PACKAGE



PW PACKAGE  
(TOP VIEW)

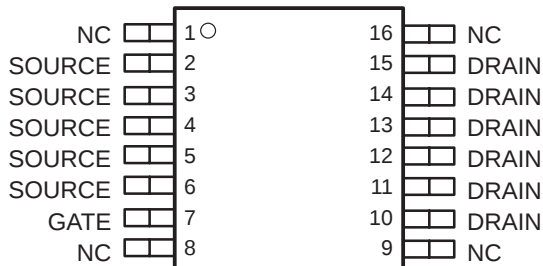

NC – No internal connection

## AVAILABLE OPTIONS

| $T_J$                                      | PACKAGED DEVICES†    |               | CHIP FORM<br>(Y) |
|--------------------------------------------|----------------------|---------------|------------------|
|                                            | SMALL OUTLINE<br>(D) | TSSOP<br>(PW) |                  |
| $-40^\circ\text{C}$ to $150^\circ\text{C}$ | TPS1101D             | TPS1101PWLE   | TPS1101Y         |

† The D package is available taped and reeled. Add an R suffix to device type (e.g., TPS1101DR). The PW package is only available left-end taped and reeled (indicated by the LE suffix on the device type; e.g., TPS1101PWLE). The chip form is tested at  $25^\circ\text{C}$ .



Please be aware that an important notice concerning availability, standard warranty, and use in critical applications of Texas Instruments semiconductor products and disclaimers thereto appears at the end of this data sheet.

LinBiCMOS is a trademark of Texas Instruments Incorporated.

PRODUCTION DATA information is current as of publication date. Products conform to specifications per the terms of Texas Instruments standard warranty. Production processing does not necessarily include testing of all parameters.




POST OFFICE BOX 655303 • DALLAS, TEXAS 75265

Copyright © 1995, Texas Instruments Incorporated

# TPS1101, TPS1101Y SINGLE P-CHANNEL ENHANCEMENT-MODE MOSFETS

SLVS079C – DECEMBER 1993 – REVISED AUGUST 1995


## schematic

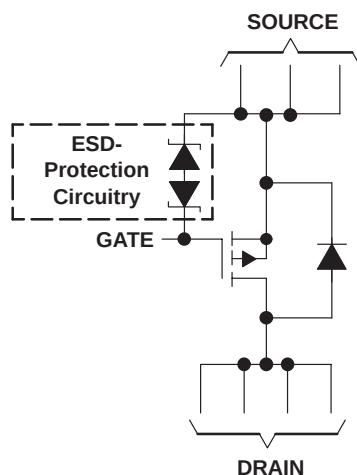

NOTE A: For all applications, all source terminals should be connected and all drain terminals should be connected.

## TPS1101Y chip information

This chip, when properly assembled, displays characteristics similar to the TPS1101. Thermal compression or ultrasonic bonding may be used on the doped aluminum bonding pads. The chips may be mounted with conductive epoxy or a gold-silicon preform.

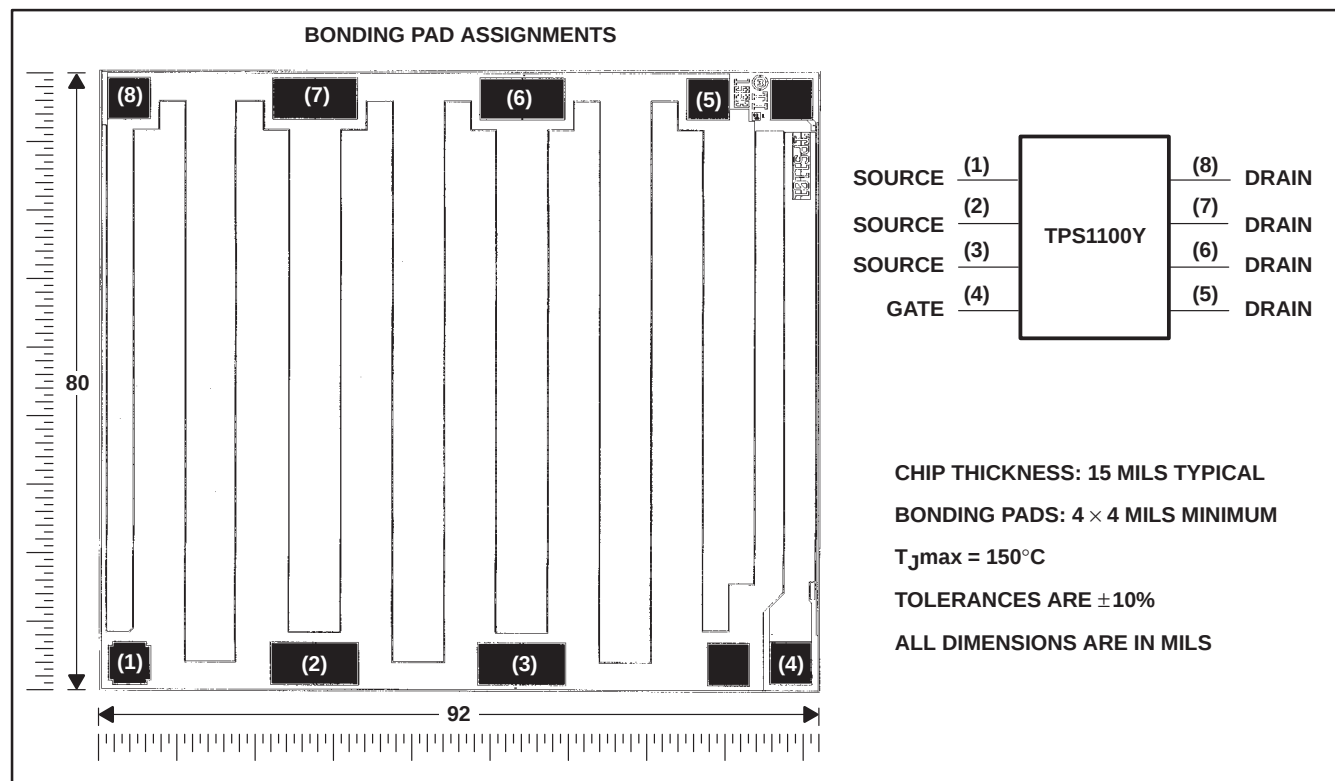

# TPS1101, TPS1101Y

## SINGLE P-CHANNEL ENHANCEMENT-MODE MOSFETS

SLVS079C – DECEMBER 1993 – REVISED AUGUST 1995

**absolute maximum ratings over operating free-air temperature (unless otherwise noted)<sup>†</sup>**

|                                                                            |                          |            |                             |             | UNIT               |
|----------------------------------------------------------------------------|--------------------------|------------|-----------------------------|-------------|--------------------|
| Drain-to-source voltage, $V_{DS}$                                          |                          |            |                             | – 15        | V                  |
| Gate-to-source voltage, $V_{GS}$                                           |                          |            |                             | 2 or – 15   | V                  |
| Continuous drain current ( $T_J = 150^{\circ}\text{C}$ ), $I_D^{\ddagger}$ | $V_{GS} = -2.7\text{ V}$ | D package  | $T_A = 25^{\circ}\text{C}$  | $\pm 0.62$  | A                  |
|                                                                            |                          |            | $T_A = 125^{\circ}\text{C}$ | $\pm 0.39$  |                    |
|                                                                            |                          | PW package | $T_A = 25^{\circ}\text{C}$  | $\pm 0.61$  |                    |
|                                                                            |                          |            | $T_A = 125^{\circ}\text{C}$ | $\pm 0.38$  |                    |
|                                                                            | $V_{GS} = -3\text{ V}$   | D package  | $T_A = 25^{\circ}\text{C}$  | $\pm 0.88$  |                    |
|                                                                            |                          |            | $T_A = 125^{\circ}\text{C}$ | $\pm 0.47$  |                    |
|                                                                            |                          | PW package | $T_A = 25^{\circ}\text{C}$  | $\pm 0.86$  |                    |
|                                                                            |                          |            | $T_A = 125^{\circ}\text{C}$ | $\pm 0.45$  |                    |
|                                                                            | $V_{GS} = -4.5\text{ V}$ | D package  | $T_A = 25^{\circ}\text{C}$  | $\pm 1.52$  |                    |
|                                                                            |                          |            | $T_A = 125^{\circ}\text{C}$ | $\pm 0.71$  |                    |
|                                                                            |                          | PW package | $T_A = 25^{\circ}\text{C}$  | $\pm 1.44$  |                    |
|                                                                            |                          |            | $T_A = 125^{\circ}\text{C}$ | $\pm 0.67$  |                    |
|                                                                            | $V_{GS} = -10\text{ V}$  | D package  | $T_A = 25^{\circ}\text{C}$  | $\pm 2.30$  |                    |
|                                                                            |                          |            | $T_A = 125^{\circ}\text{C}$ | $\pm 1.04$  |                    |
|                                                                            |                          | PW package | $T_A = 25^{\circ}\text{C}$  | $\pm 2.18$  |                    |
|                                                                            |                          |            | $T_A = 125^{\circ}\text{C}$ | $\pm 0.98$  |                    |
| Pulsed drain current, $I_D^{\ddagger}$                                     |                          |            | $T_A = 25^{\circ}\text{C}$  | $\pm 10$    | A                  |
| Continuous source current (diode conduction), $I_S$                        |                          |            | $T_A = 25^{\circ}\text{C}$  | – 1.1       | A                  |
| Storage temperature range, $T_{Stg}$                                       |                          |            |                             | – 55 to 150 | $^{\circ}\text{C}$ |
| Operating junction temperature range, $T_J$                                |                          |            |                             | – 40 to 150 | $^{\circ}\text{C}$ |
| Operating free-air temperature range, $T_A$                                |                          |            |                             | – 40 to 125 | $^{\circ}\text{C}$ |
| Lead temperature 1,6 mm (1/16 inch) from case for 10 seconds               |                          |            |                             | 260         | $^{\circ}\text{C}$ |

<sup>†</sup> Stresses beyond those listed under “absolute maximum ratings” may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated under “recommended operating conditions” is not implied. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.

<sup>‡</sup> Maximum values are calculated using a derating factor based on  $R_{\theta JA} = 158^\circ\text{C/W}$  for the D package and  $R_{\theta JA} = 176^\circ\text{C/W}$  for the PW package. These devices are mounted on an FR4 board with no special thermal considerations.

**DISSIPATION RATING TABLE**

| PACKAGE | $T_A \leq 25^\circ\text{C}$<br>POWER RATING | DERATING FACTOR <sup>‡</sup><br>ABOVE $T_A = 25^\circ\text{C}$ | $T_A = 70^\circ\text{C}$<br>POWER RATING | $T_A = 85^\circ\text{C}$<br>POWER RATING | $T_A = 125^\circ\text{C}$<br>POWER RATING |
|---------|---------------------------------------------|----------------------------------------------------------------|------------------------------------------|------------------------------------------|-------------------------------------------|
| D       | 791 mW                                      | 6.33 mW/ $^\circ\text{C}$                                      | 506 mW                                   | 411 mW                                   | 158 mW                                    |
| PW      | 710 mW                                      | 5.68 mW/ $^\circ\text{C}$                                      | 454 mW                                   | 369 mW                                   | 142 mW                                    |

<sup>‡</sup> Maximum values are calculated using a derating factor based on  $R_{\theta JA} = 158^\circ\text{C/W}$  for the D package and  $R_{\theta JA} = 176^\circ\text{C/W}$  for the PW package. These devices are mounted on an FR4 board with no special thermal considerations.

# TPS1101, TPS1101Y

## SINGLE P-CHANNEL ENHANCEMENT-MODE MOSFETS

SLVS079C – DECEMBER 1993 – REVISED AUGUST 1995

### electrical characteristics at $T_J = 25^\circ\text{C}$ (unless otherwise noted)

#### static

| PARAMETER           |                                                              | TEST CONDITIONS                                              |                         | TPS1101 |       |      | TPS1101Y |     |     | UNIT |
|---------------------|--------------------------------------------------------------|--------------------------------------------------------------|-------------------------|---------|-------|------|----------|-----|-----|------|
|                     |                                                              |                                                              |                         | MIN     | TYP   | MAX  | MIN      | TYP | MAX |      |
| V <sub>GS(th)</sub> | Gate-to-source threshold voltage                             | V <sub>DS</sub> = V <sub>GS</sub> , I <sub>D</sub> = −250 μA |                         | −1      | −1.25 | −1.5 | −1.25    |     |     | V    |
| V <sub>SD</sub>     | Source-to-drain voltage (diode-forward voltage) <sup>†</sup> | I <sub>S</sub> = −1 A, V <sub>GS</sub> = 0 V                 |                         | −1.04   |       |      | −1.04    |     |     | V    |
| I <sub>GSS</sub>    | Reverse gate current, drain short circuited to source        | V <sub>DS</sub> = 0 V, V <sub>GS</sub> = −12 V               |                         | ±100    |       |      |          |     |     | nA   |
| I <sub>DSS</sub>    | Zero-gate-voltage drain current                              | V <sub>DS</sub> = −12 V, V <sub>GS</sub> = 0 V               | T <sub>J</sub> = 25°C   | −0.5    |       |      |          |     |     | μA   |
|                     |                                                              |                                                              | T <sub>J</sub> = 125°C  | −10     |       |      |          |     |     |      |
| r <sub>DS(on)</sub> | Static drain-to-source on-state resistance <sup>†</sup>      | V <sub>GS</sub> = −10 V                                      | I <sub>D</sub> = −2.5 A | 90      |       |      | 90       |     |     | mΩ   |
|                     |                                                              | V <sub>GS</sub> = −4.5 V                                     | I <sub>D</sub> = −1.5 A | 134 190 |       |      | 134      |     |     |      |
|                     |                                                              | V <sub>GS</sub> = −3 V                                       | I <sub>D</sub> = −0.5 A | 198 310 |       |      | 198      |     |     |      |
|                     |                                                              | V <sub>GS</sub> = −2.7 V                                     |                         | 232 400 |       |      | 232      |     |     |      |
| g <sub>fs</sub>     | Forward transconductance <sup>†</sup>                        | V <sub>DS</sub> = −10 V, I <sub>D</sub> = −2 A               |                         | 4.3     |       |      | 4.3      |     |     | S    |

<sup>†</sup> Pulse test: pulse duration  $\leq 300\ \mu\text{s}$ , duty cycle  $\leq 2\%$

#### dynamic

| PARAMETER                                          | TEST CONDITIONS                                                                                                   | TPS1101, TPS1101Y |       |     | UNIT |
|----------------------------------------------------|-------------------------------------------------------------------------------------------------------------------|-------------------|-------|-----|------|
|                                                    |                                                                                                                   | MIN               | TYP   | MAX |      |
| $Q_g$ Total gate charge                            | $V_{DS} = -10\ \text{V}$ , $V_{GS} = -10\ \text{V}$ , $I_D = -1\ \text{A}$                                        |                   | 11.25 |     | nC   |
| $Q_{gs}$ Gate-to-source charge                     |                                                                                                                   |                   | 1.5   |     |      |
| $Q_{gd}$ Gate-to-drain charge                      |                                                                                                                   |                   | 2.6   |     |      |
| $t_{d(on)}$ Turn-on delay time                     | $V_{DD} = -10\ \text{V}$ , $R_L = 10\ \Omega$ , $I_D = -1\ \text{A}$ ,<br>$R_G = 6\ \Omega$ , See Figures 1 and 2 |                   | 6.5   |     | ns   |
| $t_{d(off)}$ Turn-off delay time                   |                                                                                                                   |                   | 19    |     | ns   |
| $t_r$ Rise time                                    |                                                                                                                   |                   | 5.5   |     | ns   |
| $t_f$ Fall time                                    |                                                                                                                   |                   | 13    |     |      |
| $t_{rr(SD)}$ Source-to-drain reverse recovery time | $I_F = 5.3\ \text{A}$ , $di/dt = 100\ \text{A}/\mu\text{s}$                                                       |                   | 16    |     |      |

PARAMETER MEASUREMENT INFORMATION

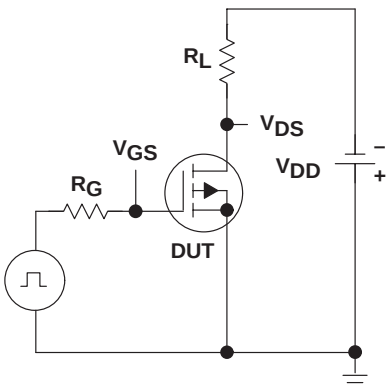


Figure 1. Switching-Time Test Circuit

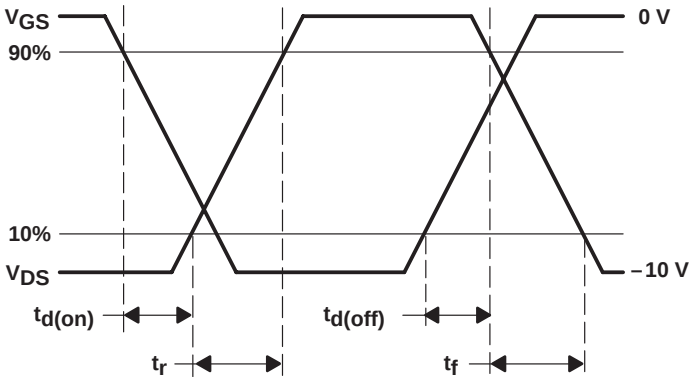


Figure 2. Switching-Time Waveforms

TYPICAL CHARACTERISTICS





Table of Graphs

|                                                         |                            | FIGURE |
|---------------------------------------------------------|----------------------------|--------|
| Drain current                                           | vs Drain-to-source voltage | 3      |
| Drain current                                           | vs Gate-to-source voltage  | 4      |
| Static drain-to-source on-state resistance              | vs Drain current           | 5      |
| Capacitance                                             | vs Drain-to-source voltage | 6      |
| Static drain-to-source on-state resistance (normalized) | vs Junction temperature    | 7      |
| Source-to-drain diode current                           | vs Source-to-drain voltage | 8      |
| Static drain-to-source on-state resistance              | vs Gate-to-source voltage  | 9      |
| Gate-to-source threshold voltage                        | vs Junction temperature    | 10     |
| Gate-to-source voltage                                  | vs Gate charge             | 11     |

# TPS1101, TPS1101Y SINGLE P-CHANNEL ENHANCEMENT-MODE MOSFETS

SLVS079C – DECEMBER 1993 – REVISED AUGUST 1995

## TYPICAL CHARACTERISTICS

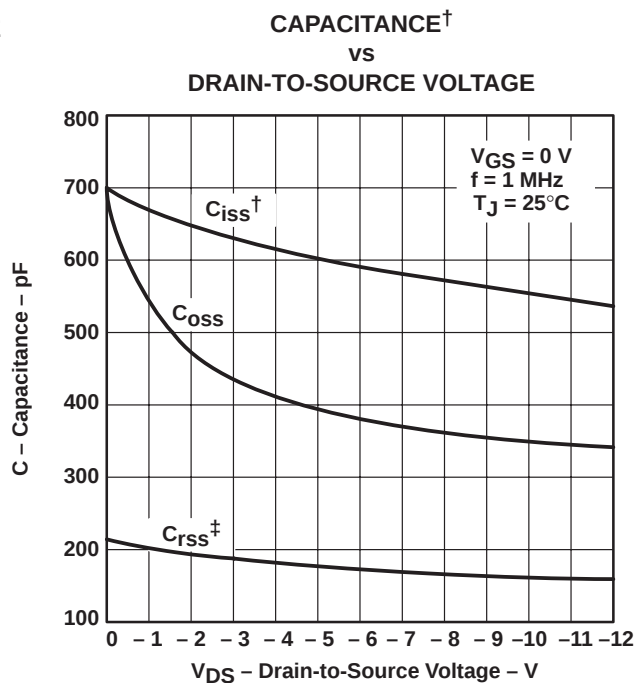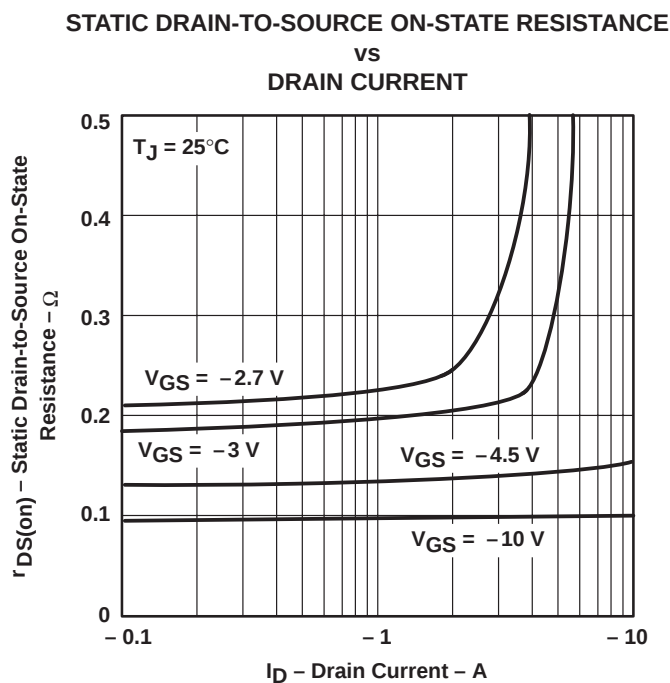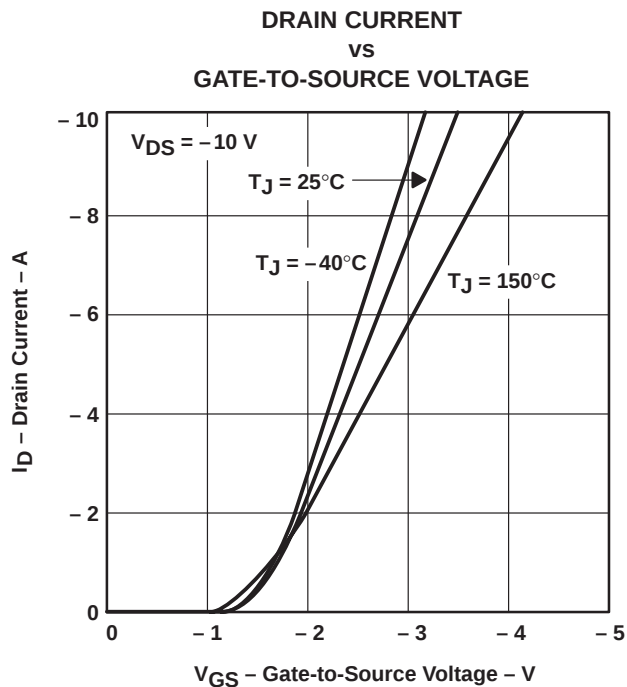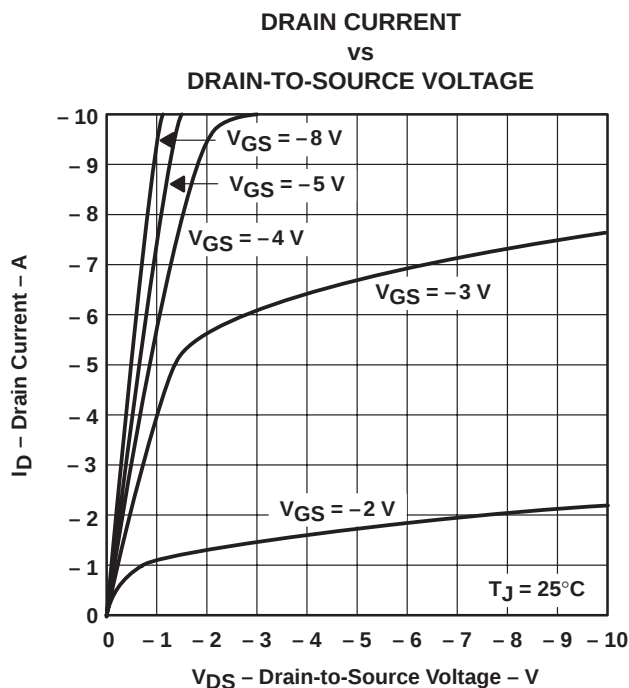

$$† C_{iss} = C_{gs} + C_{gd}, C_{ds(short)}$$

$$‡ C_{rss} = C_{gd}, C_{oss} = C_{ds} + \frac{C_{gs} C_{gd}}{C_{gs} + C_{gd}} \approx C_{ds} + C_{gd}$$

TYPICAL CHARACTERISTICS

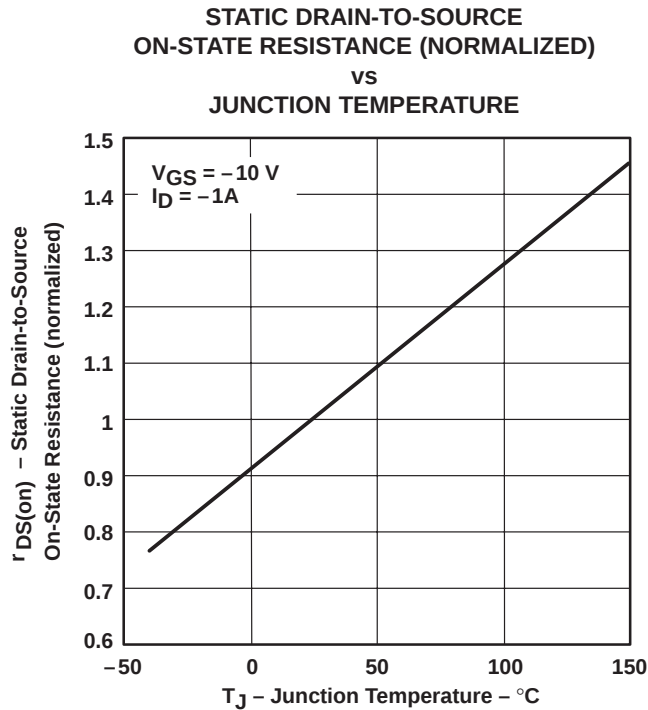


Figure 7

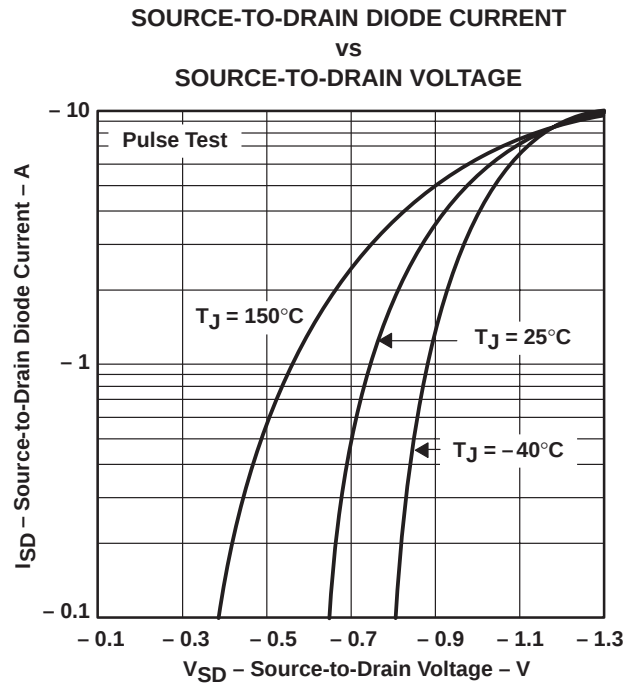


Figure 8

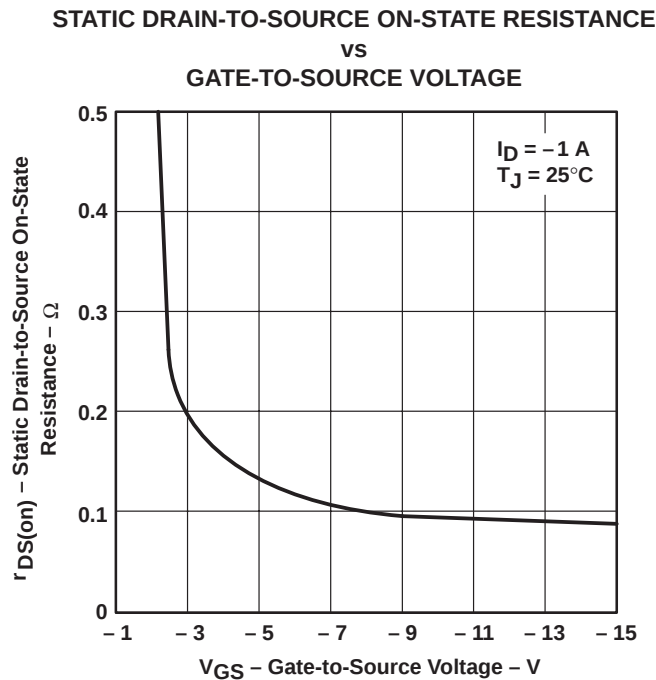


Figure 9

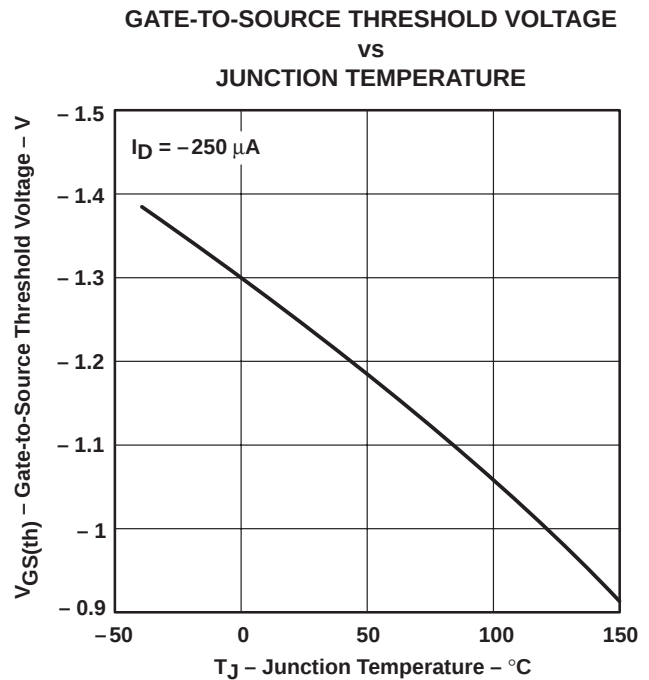


Figure 10

# TPS1101, TPS1101Y SINGLE P-CHANNEL ENHANCEMENT-MODE MOSFETS

SLVS079C – DECEMBER 1993 – REVISED AUGUST 1995

## TYPICAL CHARACTERISTICS



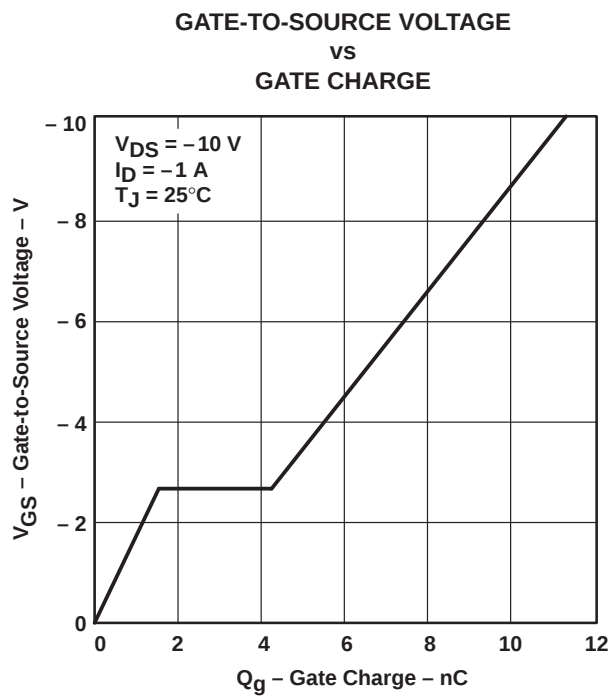


Figure 11

## THERMAL INFORMATION

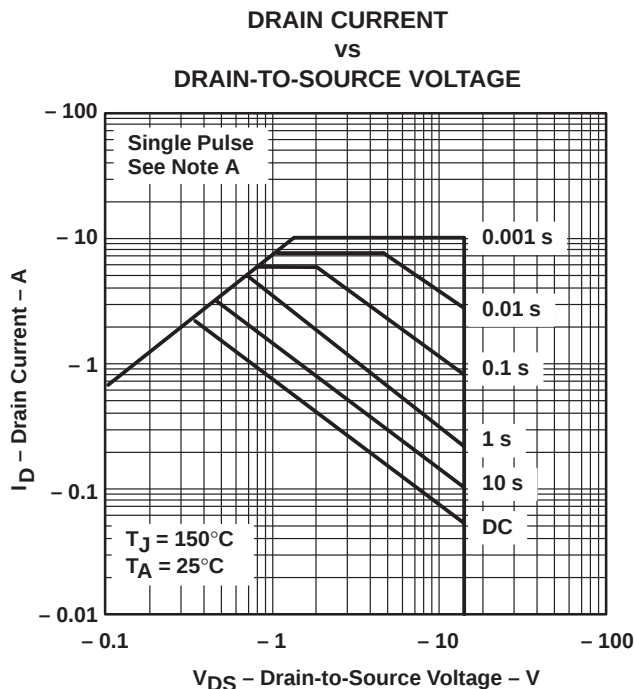

NOTE A: Values are for the D package and are FR4-board-mounted only.

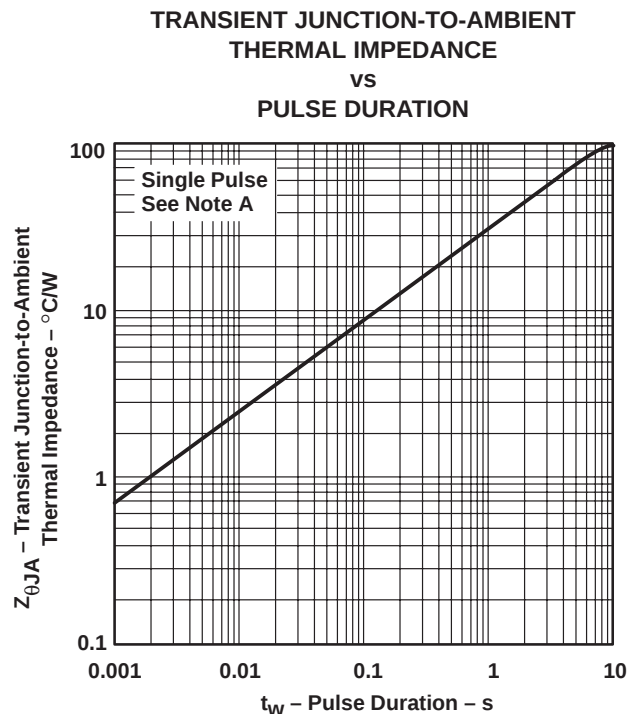

NOTE A: Values are for the D package and are FR4-board-mounted only.

## APPLICATION INFORMATION

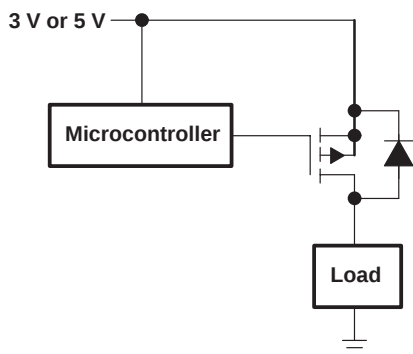


Figure 14. Notebook Load Management

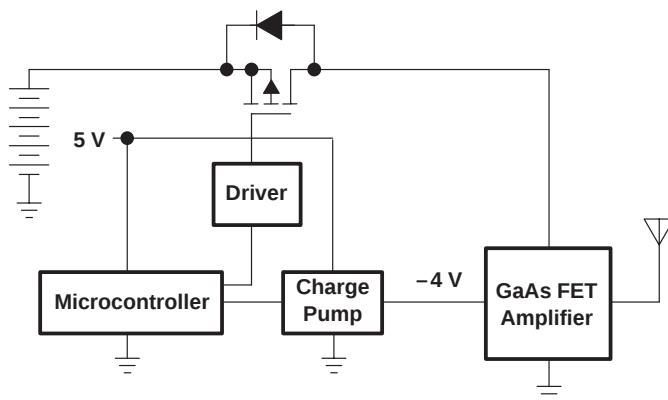


Figure 15. Cellular Phone Output Drive

## PACKAGING INFORMATION

| Orderable part number      | Status<br>(1) | Material type<br>(2) | Package   Pins  | Package qty   Carrier | RoHS<br>(3) | Lead finish/<br>Ball material<br>(4) | MSL rating/<br>Peak reflow<br>(5) | Op temp (°C)   | Part marking<br>(6) |
|----------------------------|---------------|----------------------|-----------------|-----------------------|-------------|--------------------------------------|-----------------------------------|----------------|---------------------|
| <a href="#">TPS1101D</a>   | Active        | Production           | SOIC (D)   8    | 75   TUBE             | Yes         | NIPDAU                               | Level-1-260C-UNLIM                | -              | 1101                |
| TPS1101D.A                 | Active        | Production           | SOIC (D)   8    | 75   TUBE             | Yes         | NIPDAU                               | Level-1-260C-UNLIM                | See TPS1101D   | 1101                |
| <a href="#">TPS1101DR</a>  | Active        | Production           | SOIC (D)   8    | 2500   LARGE T&R      | Yes         | NIPDAU                               | Level-1-260C-UNLIM                | -              | 1101                |
| TPS1101DR.A                | Active        | Production           | SOIC (D)   8    | 2500   LARGE T&R      | Yes         | NIPDAU                               | Level-1-260C-UNLIM                | See TPS1101DR  | 1101                |
| <a href="#">TPS1101PWR</a> | Active        | Production           | TSSOP (PW)   16 | 2000   LARGE T&R      | Yes         | NIPDAU                               | Level-1-260C-UNLIM                | -              | PS1101              |
| TPS1101PWR.A               | Active        | Production           | TSSOP (PW)   16 | 2000   LARGE T&R      | Yes         | NIPDAU                               | Level-1-260C-UNLIM                | See TPS1101PWR | PS1101              |
| TPS1101PWR.B               | Active        | Production           | TSSOP (PW)   16 | 2000   LARGE T&R      | Yes         | NIPDAU                               | Level-1-260C-UNLIM                | See TPS1101PWR | PS1101              |

<sup>(1)</sup> **Status:** For more details on status, see our [product life cycle](#).

<sup>(2)</sup> **Material type:** When designated, preproduction parts are prototypes/experimental devices, and are not yet approved or released for full production. Testing and final process, including without limitation quality assurance, reliability performance testing, and/or process qualification, may not yet be complete, and this item is subject to further changes or possible discontinuation. If available for ordering, purchases will be subject to an additional waiver at checkout, and are intended for early internal evaluation purposes only. These items are sold without warranties of any kind.

<sup>(3)</sup> **RoHS values:** Yes, No, RoHS Exempt. See the [TI RoHS Statement](#) for additional information and value definition.

<sup>(4)</sup> **Lead finish/Ball material:** Parts may have multiple material finish options. Finish options are separated by a vertical ruled line. Lead finish/Ball material values may wrap to two lines if the finish value exceeds the maximum column width.

<sup>(5)</sup> **MSL rating/Peak reflow:** The moisture sensitivity level ratings and peak solder (reflow) temperatures. In the event that a part has multiple moisture sensitivity ratings, only the lowest level per JEDEC standards is shown. Refer to the shipping label for the actual reflow temperature that will be used to mount the part to the printed circuit board.

<sup>(6)</sup> **Part marking:** There may be an additional marking, which relates to the logo, the lot trace code information, or the environmental category of the part.

Multiple part markings will be inside parentheses. Only one part marking contained in parentheses and separated by a "~" will appear on a part. If a line is indented then it is a continuation of the previous line and the two combined represent the entire part marking for that device.

**Important Information and Disclaimer:** The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.



## TAPE AND REEL INFORMATION



\*All dimensions are nominal

| Device     | Package Type | Package Drawing | Pins | SPQ  | Reel Diameter (mm) | Reel Width W1 (mm) | A0 (mm) | B0 (mm) | K0 (mm) | P1 (mm) | W (mm) | Pin1 Quadrant |
|------------|--------------|-----------------|------|------|--------------------|--------------------|---------|---------|---------|---------|--------|---------------|
| TPS1101DR  | SOIC         | D               | 8    | 2500 | 330.0              | 12.4               | 6.4     | 5.2     | 2.1     | 8.0     | 12.0   | Q1            |
| TPS1101PWR | TSSOP        | PW              | 16   | 2000 | 330.0              | 12.4               | 6.9     | 5.6     | 1.6     | 8.0     | 12.0   | Q1            |


## TAPE AND REEL BOX DIMENSIONS



\*All dimensions are nominal

| Device     | Package Type | Package Drawing | Pins | SPQ  | Length (mm) | Width (mm) | Height (mm) |
|------------|--------------|-----------------|------|------|-------------|------------|-------------|
| TPS1101DR  | SOIC         | D               | 8    | 2500 | 340.5       | 338.1      | 20.6        |
| TPS1101PWR | TSSOP        | PW              | 16   | 2000 | 353.0       | 353.0      | 32.0        |

## TUBE

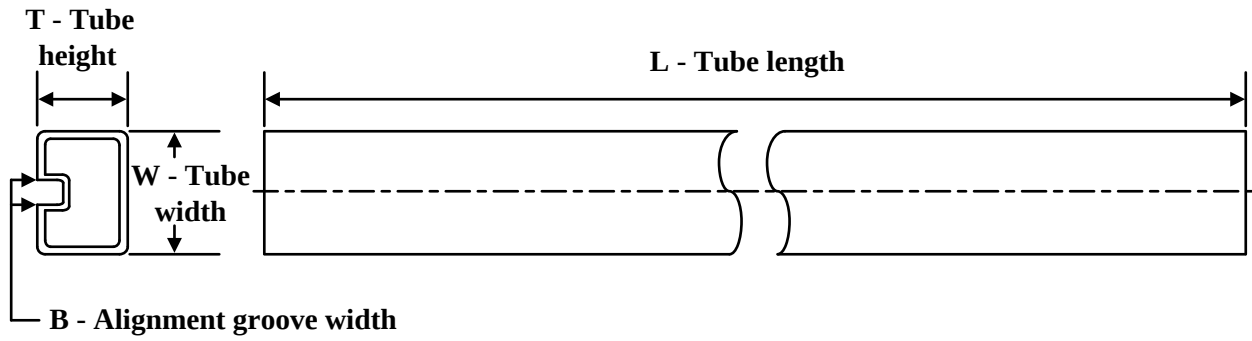

\*All dimensions are nominal

| Device     | Package Name | Package Type | Pins | SPQ | L (mm) | W (mm) | T (μm) | B (mm) |
|------------|--------------|--------------|------|-----|--------|--------|--------|--------|
| TPS1101D   | D            | SOIC         | 8    | 75  | 507    | 8      | 3940   | 4.32   |
| TPS1101D.A | D            | SOIC         | 8    | 75  | 507    | 8      | 3940   | 4.32   |

## IMPORTANT NOTICE AND DISCLAIMER

TI PROVIDES TECHNICAL AND RELIABILITY DATA (INCLUDING DATA SHEETS), DESIGN RESOURCES (INCLUDING REFERENCE DESIGNS), APPLICATION OR OTHER DESIGN ADVICE, WEB TOOLS, SAFETY INFORMATION, AND OTHER RESOURCES "AS IS" AND WITH ALL FAULTS, AND DISCLAIMS ALL WARRANTIES, EXPRESS AND IMPLIED, INCLUDING WITHOUT LIMITATION ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR NON-INFRINGEMENT OF THIRD PARTY INTELLECTUAL PROPERTY RIGHTS.

These resources are intended for skilled developers designing with TI products. You are solely responsible for (1) selecting the appropriate TI products for your application, (2) designing, validating and testing your application, and (3) ensuring your application meets applicable standards, and any other safety, security, regulatory or other requirements.

These resources are subject to change without notice. TI grants you permission to use these resources only for development of an application that uses the TI products described in the resource. Other reproduction and display of these resources is prohibited. No license is granted to any other TI intellectual property right or to any third party intellectual property right. TI disclaims responsibility for, and you will fully indemnify TI and its representatives against, any claims, damages, costs, losses, and liabilities arising out of your use of these resources.

TI's products are provided subject to [TI's Terms of Sale](#) or other applicable terms available either on [ti.com](https://www.ti.com) or provided in conjunction with such TI products. TI's provision of these resources does not expand or otherwise alter TI's applicable warranties or warranty disclaimers for TI products.

TI objects to and rejects any additional or different terms you may have proposed.

Mailing Address: Texas Instruments, Post Office Box 655303, Dallas, Texas 75265  
Copyright © 2025, Texas Instruments Incorporated