

SN55116, SN75116, THRU SN75119 DIFFERENTIAL LINE TRANSCEIVERS

SLLS073B – MAY 1976 – REVISED MAY 1995

features common to all types

- Single 5-V Supply
- 3-State Driver Output Circuitry
- TTL-Compatible Driver Inputs
- TTL-Compatible Receiver Output
- Differential Line Operation
- Receiver Output Strobe ('116, SN75117) or Enable (SN75118, SN75119)
- Designed for Party-Line (Data-Bus) Applications
- Choice of Ceramic or Plastic Packages

additional features of the SN55116/SN75116

- Independent Driver and Receiver
- Choice of Open-Collector or Totem-Pole Outputs on Both Driver and Receiver
- Dual Data Inputs on Driver
- Optional Line-Termination Resistor in Receiver
- ± 15 -V Receiver Common-Mode Capability
- Receiver Frequency Response Control

additional features of the SN75117

- Driver Output Internally Connected to Receiver Input

The SN75118 is an SN75116 With 3-State Receiver Output Circuitry

The SN75119 is an SN75117 With 3-State Receiver Output Circuitry

description

These integrated circuits are designed for use in interfacing between TTL-type digital systems and differential data-transmission lines. They are especially useful for party-line (data-bus) applications. Each of these circuit types combine in one package a 3-state differential line driver and a differential input line receiver, both of which operate from a single 5-V power supply. The driver inputs and the receiver outputs are TTL compatible. The driver employed is similar to the SN55113/SN75113 3-state line driver, and the receiver is similar to the SN55115/SN75115 line receiver.

The '116 and SN75118 circuits offer all the features of the SN55113/SN75113 driver and the SN55115/SN75115 receiver combined. The driver performs the dual input AND and NAND functions when enabled or presents a high impedance to the load when in the disabled state. The driver output stages are similar to TTL totem-pole outputs, but have the current-sink portion separated from the current-sourcing portion and both are brought out to adjacent package terminals. This feature allows the user the option of using the driver in the open-collector output configuration, or, by connecting the adjacent source and sink terminals together, of using the driver in the normal totem-pole output configuration.

The receiver portion of the '116 and SN75118 features a differential input circuit having a common-mode voltage range of ± 15 V. An internal 130- Ω resistor is also provided, which may optionally be used for terminating the transmission line. A frequency response control terminal allows the user to reduce the speed of the receiver or to improve differential noise immunity. The receiver of the '116 also has an output strobe and a split totem-pole output. The receiver of the SN75118 has an output-enable for the 3-state split totem-pole output. The receiver section of either circuit is independent of the driver section except for the V_{CC} and ground terminals.

The SN75117 and SN75119 circuits provide the basic driver and receiver functions of the '116 and SN75118, but use a package that is only half as large. The SN75117 and SN75119 are intended primarily for party-line or bus-organized systems as the driver outputs are internally connected to the receiver inputs. The driver has a single data input and a single enable input, and the SN75117 receiver has an output strobe while the SN75119 receiver has a 3-state-output enable. These devices do not, however, provide output connection options, line termination resistors, or receiver frequency-response controls.

The SN55116 is characterized for operation over the full military temperature range of -55°C to 125°C . The SN75116, SN75117, SN75118, and SN75119 are characterized for operation from 0°C to 70°C .

PRODUCTION DATA Information is current as of publication date. Products conform to specifications per the terms of Texas Instruments standard warranty. Production processing does not necessarily include testing of all parameters.



**TEXAS
INSTRUMENTS**

Copyright © 1995, Texas Instruments Incorporated

POST OFFICE BOX 655303 • DALLAS, TEXAS 75265


2-217

8961724 0098452 10T


SN55116, SN75116, THRU SN75119 DIFFERENTIAL LINE TRANSCEIVERS

SLLS073B - MAY 1976 - REVISED MAY 1995

SN55116 . . . J PACKAGE
SN75116 . . . D OR N PACKAGE
(TOP VIEW)




SN55116 . . . FK PACKAGE
(TOP VIEW)




NC - No internal connection


SN75118 . . . D OR N PACKAGE
(TOP VIEW)



SN75117 . . . D OR P PACKAGE
(TOP VIEW)



SN75119 . . . D OR P PACKAGE
(TOP VIEW)



Function Tables

'116, SN75118
DRIVER

INPUTS			OUTPUTS	
DE	DA	DB	DY	DZ
L	X	X	Z	Z
H	L	X	L	H
H	X	L	L	H
H	H	H	H	L

'116, SN75118
RECEIVER

RS/RE	DIFF INPUT	OUTPUTS RY	
		'116	SN75118
L	X	H	Z
H	L	H	H
H	H	L	L

H = high level ($V_I \geq V_{IH}$ min or V_{ID} more positive than V_{TH} max)
L = low level ($V_I \leq V_{IL}$ max or V_{ID} more negative than V_{TL} max)
X = irrelevant
Z = high impedance (off)

SN75117, SN75119
DRIVER

INPUTS		OUTPUTS	
DI	DE	A	B
H	H	H	L
L	H	L	H
X	L	Z	Z

SN75117, SN75119
RECEIVER

INPUTS			OUTPUT RY	
A	B	RS/RE	SN75117	SN75119
H	L	H	H	H
L	H	H	L	L
X	X	L	H	Z

8961724 0098453 046


**TEXAS
INSTRUMENTS**

POST OFFICE BOX 655303 • DALLAS, TEXAS 75265

SN55116, SN75116, THRU SN75119 DIFFERENTIAL LINE TRANSCEIVERS


SLLS073B - MAY 1976 - REVISED MAY 1995

logic symbol†

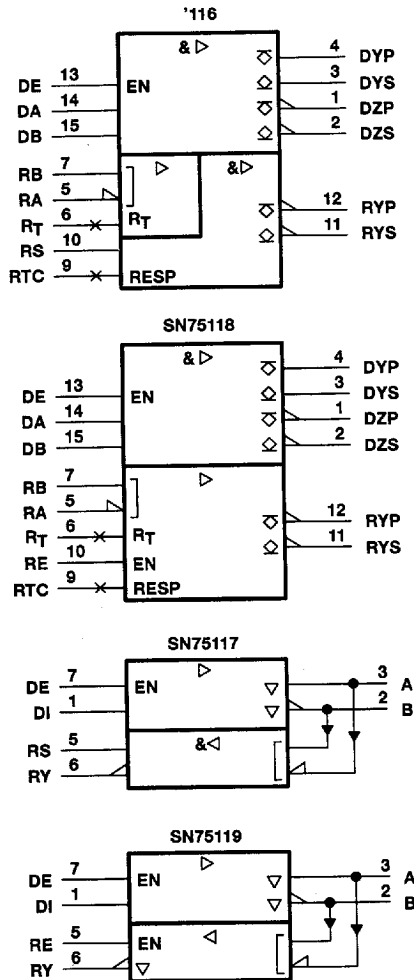

† These symbols are in accordance with ANSI/IEEE Std 91-1984 and IEC Publication 617-12.

logic diagrams (positive logic)

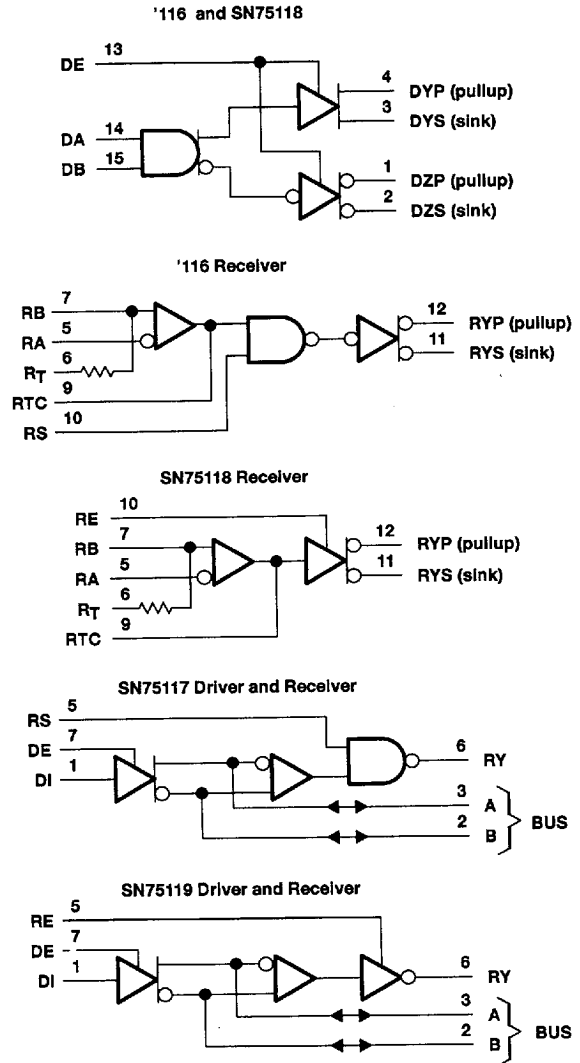

Pin numbers shown for the SN55116 are for the J package, those shown for the SN75118 are for the N package, those shown for SN75117 and SN75119 are for the P package.

**TEXAS
INSTRUMENTS**

POST OFFICE BOX 655303 • DALLAS, TEXAS 75265


8961724 0098454 T82

2-219

SN55116, SN75116, THRU SN75119
DIFFERENTIAL LINE TRANSCEIVERS

SLLS073B – MAY 1976 – REVISED MAY 1995

schematics of inputs and outputs

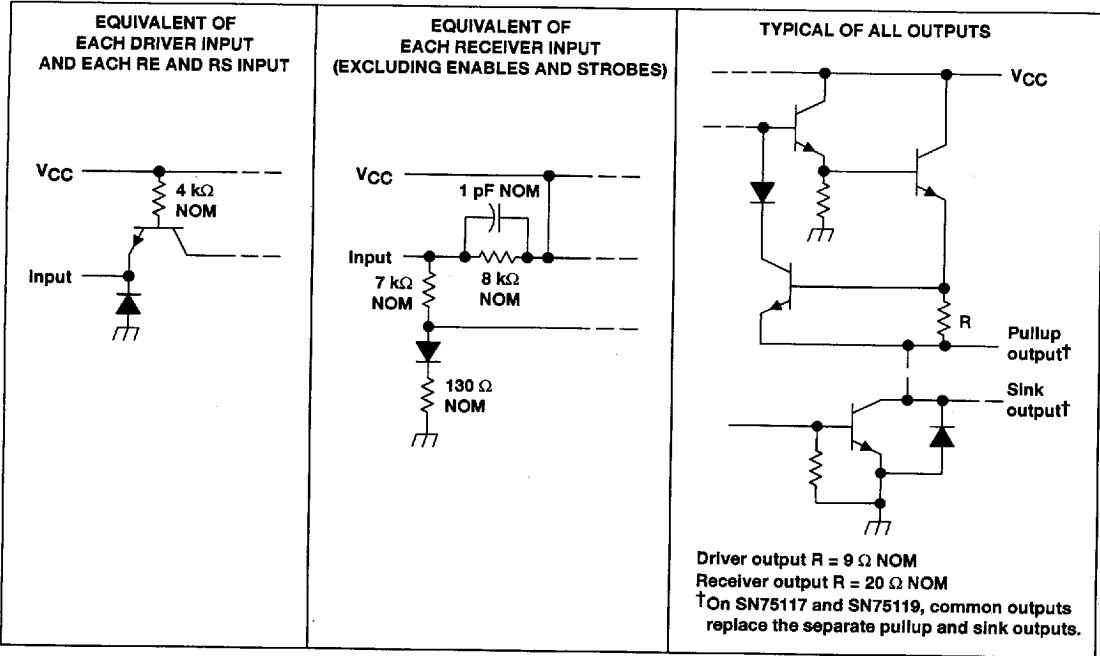

absolute maximum ratings over operating free-air temperature range (unless otherwise noted)†

		'116, SN75118	SN75117, SN75119	UNIT
Supply voltage, V_{CC} (see Note 1)		7	7	V
Input voltage, V_I	DA, DB, DE, DI, RE, RS	5.5	5.5	V
	RA, RB, RT	±25		
	A and B		0 to 6	
Off-state voltage applied to open-collector outputs		12		V

	SN55116	SN75116 THRU SN75119	UNIT
Continuous total power dissipation (see Note 2)	See Dissipation Rating Table		
Operating free-air temperature range, T_A	-55 to 125	0 to 70	°C
Storage temperature range, T_{stg}	-65 to 50	-65 to 50	°C
Case temperature for 60 seconds, T_C : FK package	260		°C
Lead temperature 1,6 mm (1/16 inch) from case for 60 seconds: J package	300	300	°C
Lead temperature 1,6 mm (1/16 inch) from case for 10 seconds: D, N, or P package		260	°C

† Stresses beyond those listed under "absolute maximum ratings" may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated under "recommended operating conditions" is not implied. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.

- NOTES: 1. All voltage values are with respect to network ground terminal.
2. In the FK and J packages, SN55116 chip is alloy mounted and SN75116 through SN75119 chips are glass mounted.

8961724 0098455 919

TEXAS
INSTRUMENTS

POST OFFICE BOX 655303 • DALLAS, TEXAS 75265

SN55116, SN75116, THRU SN75119 DIFFERENTIAL LINE TRANSCEIVERS

SLLS073B – MAY 1976 – REVISED MAY 1996

DISSIPATION RATING TABLE

PACKAGE	$T_A \leq 25^\circ\text{C}$ POWER RATING	DERATING FACTOR ABOVE $T_A = 25^\circ\text{C}$	$T_A = 70^\circ\text{C}$ POWER RATING	$T_A = 125^\circ\text{C}$ POWER RATING
D (8 pin)	725 mW	5.8 mW/ $^\circ\text{C}$	464 mW	—
D (16 pin)	950 mW	7.6 mW/ $^\circ\text{C}$	608 mW	—
FK	1375 mW	11.0 mW/ $^\circ\text{C}$	880 mW	275 mW
J	1375 mW	11.0 mW/ $^\circ\text{C}$	880 mW	275 mW
N	1150 mW	9.2 mW/ $^\circ\text{C}$	736 mW	—
P	1000 mW	8.0 mW/ $^\circ\text{C}$	640 mW	—

recommended operating conditions

PARAMETER		SN55116			SN75'			UNIT
		MIN	NOM	MAX	MIN	NOM	MAX	
Supply voltage, V_{CC}		4.5	5	5.5	4.5	5	5.5	V
High-level input voltage, V_{IH}	All inputs except differential inputs	2			2			V
Low-level input voltage, V_{IL}		0.8			0.8			V
High-level output current, I_{OH}	Drivers	-40			-40			mA
	Receivers	-5			-5			
Low-level output current, I_{OL}	Drivers	40			40			mA
	Receivers	15			15			
Receiver input voltage, V_I	'116, '118	±15			±15			V
	'117, '119	0	6		0	6		
Common-mode receiver input voltage, V_{ICR}	'116, '118	±15			±15			V
	'117, '119	0	6		0	6		
Operating free-air temperature, T_A		-55			0			70 °C

8961724 0098456 855



TEXAS
INSTRUMENTS

POST OFFICE BOX 655303 • DALLAS, TEXAS 75265

2-221

SN55116, SN75116, THRU SN75119 DIFFERENTIAL LINE TRANSCEIVERS

SLLS073B - MAY 1976 - REVISED MAY 1995

electrical characteristics over recommended operating free-air temperature range (unless otherwise noted)
driver section

PARAMETER	TEST CONDITION†	'116, SN75118		SN75117, SN75119		UNIT
		MIN	TYP‡	MIN	TYP‡	
V _{IK} Input clamp voltage	V _{CC} = MIN, I _I = -12 mA					V
V _{OH} High-level output voltage	T _A = 25°C (SN55116), T _A = 0°C to 70°C (SN75116)	2.4	3.4	2.4	3.4	V
	V _{CC} = MIN, V _{IL} = 0.8 V, I _{IH} = 2 V	2	3	2	3	
	T _A = -55°C to 125°C (SN55116)	2		2		
	I _{OH} = -10 mA					
V _{OL} Low-level output voltage	I _{OH} = -40 mA	1.8		1.8		V
V _{OK} Output clamp voltage	V _{CC} = MIN, V _{IH} = 2 V, V _{IL} = 0.8 V, I _{OL} = 40 mA		0.4		0.4	V
	V _{CC} = MAX, I _O = -40 mA, DE at 0.8 V		-1.5		-1.5	V
I _O (off) Off-state open-collector output current	T _A = 25°C		1		10	µA
	V _{CC} = MAX, V _O = 12 V				200	
I _{OZ} Off-state (high-impedance-state) output current	T _A = MAX				20	µA
	V _{CC} = MAX, V _O = 0 to V _{CC} , DE at 0.8 V, T _A = 25°C				±10	
	V _{CC} = MAX, V _O = 0				-300	
	DE at 0.8 V, V _O = 0.4 V to V _{CC} , T _A = MAX				±150	
I _I Input current at maximum input voltage	V _O = 0 to V _{CC}				±20	mA
	V _{CC} = MAX, V _I = 5.5 V				1	
I _{IH} High-level input current	V _{CC} = MAX, V _I = 2.4 V				40	µA
I _{IL} Low-level input current	V _{CC} = MAX, V _I = 0.4 V				-1.6	mA
I _{OS} Short-circuit output current§	V _{CC} = MAX, V _O = 0, T _A = 25°C	-40		-40		mA
I _{CC} Supply current (driver and receiver combined)	V _{CC} = MAX, T _A = 25°C		42		60	mA

† All parameters with the exception of off-state open-collector output current are measured with the active pullup connected to the sink output. For conditions shown as MIN or MAX, use the appropriate value specified under recommended operating conditions.

‡ All typical values are at V_{CC} = 5 V and T_A = 25°C.

§ Not more than one output should be shorted at a time, and duration of the short circuit should not exceed one second.

8961724 0098457 791

 **TEXAS
INSTRUMENTS**

POST OFFICE BOX 655303 • DALLAS, TEXAS 75265

SN55116, SN75116, THRU SN75119 DIFFERENTIAL LINE TRANSCEIVERS

SLLS073B – MAY 1976 – REVISED MAY 1995

switching characteristics, $V_{CC} = 5\text{ V}$, $C_L = 30\text{ pF}$, $T_A = 25^\circ\text{C}$

driver section

PARAMETER	TEST CONDITIONS	MIN	TYP	MAX	UNIT
tPLH Propagation delay time, low-to-high level output	See Figure 13		14	30	ns
tPHL Propagation delay time, high-to-low level output			12	30	
tpZH Output enable time to high level	$R_L = 180\ \Omega$, See Figure 14		8	20	ns
tpZL Output enable time to low level	$R_L = 250\ \Omega$, See Figure 15		17	40	ns
tPHZ Output disable time from high level	$R_L = 180\ \Omega$, See Figure 14		16	30	ns
tPLZ Output disable time from low level	$R_L = 250\ \Omega$, See Figure 15		20	35	ns



**TEXAS
INSTRUMENTS**

POST OFFICE BOX 655303 • DALLAS, TEXAS 75265

8961724 0098458 628

2-223

SN55116, SN75116, THRU SN75119 DIFFERENTIAL LINE TRANSCEIVERS

SLLS073B - MAY 1976 - REVISED MAY 1995

electrical characteristics over recommended operating free-air temperature range (unless otherwise noted)
receiver section

PARAMETER	TEST CONDITIONST	'116, SN75117		SN75117, SN75119		UNIT		
		MIN	TYP†	MAX	MIN		TYP†	MAX
VIT + Positive-going threshold voltage§	VO = 0.4 V, See Note 3 IOL = 15 mA, VCC = MIN, VICR = 0, See Note 4 VCC = 5 V, VICR = MAX, See Note 5			0.5			0.5	
				1			1	
VIT - Negative-going threshold voltage§	VO = 2.4 V, See Note 3 IOL = -5 mA, VCC = MIN, VICR = 0, See Note 4 VCC = 5 V, VICR = MAX, See Note 5			-0.5¶			-0.5¶	
				-1¶			-1¶	
VI Input voltage range#	VCC = 5 V, VID = -1 V or 1 V, See Note 3	15 to -15			6 to 0			V
VOH High-level output voltage	VCC = MIN, VICR = 0, See Notes 4 and 6 IOL = -5 mA, See Note 3 VCC = 5 V, VICR = MAX, See Note 5	2.4			2.4			V
		2.4			2.4			V
VOL Low-level output voltage	VCC = MIN, VICR = 0, See Notes 4 and 7 IOL = 15 mA, See Note 3 VCC = 5 V, VICR = MAX, See Note 5			0.4			0.4	
				0.4			0.4	
II(rec) Receiver input current	VI = 0, Other input at 0 V VCC = MAX, See Note 3 VI = 0.4 V, Other input at 2.4 V VI = 2.4 V, Other input at 0.4 V			-0.5 -0.9			-0.5 -1	
				-0.4 -0.7			-0.4 -0.8	
				0.1 0.3			0.1 0.4	
II Input current at maximum input voltage	VCC = MIN, VID = -0.5 V, Vstrobe = 4.5 V VCC = MAX, VI = 5.5 V			5			5	
				1			1	

† Unless otherwise noted, V_{strobe} = 2.4 V. All parameters with the exception of off-state open-collector output current are measured with the active pullup connected to the sink output. For conditions shown as MIN or MAX, use the appropriate value specified under recommended operating conditions.

‡ All typical values are at V_{CC} = 5 V, T_A = 25°C, and V_{IC} = 0.

§ Differential voltages are at the B input terminal with respect to the A input terminal. Neither receiver input of the SN75117 or SN75119 should be taken negative with respect to GND. The algebraic convention, where the less positive (more negative) limit is designated as minimum, is used in this data sheet for threshold voltages only.

Input voltage range is the voltage range that, if exceeded at either input, will cause the receiver to cease functioning properly.

NOTES: 3. Measurement of these characteristics on the SN75117 and SN75119 requires the driver to be disabled with the driver enable at 0.8 V.

4. This applies with the less positive receiver input grounded.

5. For 116 and SN75118, this applies with the more positive receiver input at 15 V or the more negative receiver input at -15 V. For SN75117 and SN75119, this applies with the more positive receiver input at 6 V.

6. For SN55116, V_{ID} = -1 V

7. For SN55116, V_{ID} = 1 V

8961724 0098459 564

 **TEXAS
INSTRUMENTS**

POST OFFICE BOX 655303 • DALLAS, TEXAS 75265

SN55116, SN75116, THRU SN75119 DIFFERENTIAL LINE TRANSCEIVERS

SLLS073B - MAY 1976 - REVISED MAY 1995

receiver section (continued)

PARAMETER		TEST CONDITION†		'116, SN75118		SN75117, SN75119		UNIT
I _{IH}	High-level input current	Enable	V _{CC} = MAX, V _I = 2.4 V	MIN	Typ	MAX	MAX	μA
	Low-level input current	Strobe	V _{CC} = MAX, V _{ID} = 0.5 V, V _{stroke} = 0.4 V, See Notes 4 and 7			-2.4	-2.4	mA
I _L	Response-time-control current (RTCC)	Enable	V _{CC} = MAX, V _I = 0.4 V			-1.6	-1.6	mA
			V _{CC} = MAX, V _{ID} = 0.5 V, RC at 0 V, See Notes 4 and 7	-1.2				mA
I _{O(off)}	Off-state open-collector output current		T _A = 25°C	1	10			μA
			T _A = MAX		200			μA
I _{OZ}	Off-state (high-impedance-state) output current		T _A = 25°C		±10		±10	μA
			T _A = MAX		±20		±20	μA
R _T	Line-terminating resistance		T _A = 25°C	77	167			Ω
			T _A = MAX	-15	-80	-15	-80	mA
I _{CC}	Short current (driver and receiver combined)		V _{CC} = MAX, V _{ID} = 0.5 V, See Notes 4 and 7	42	60	42	60	mA

† Unless otherwise noted V_{stroke} = 2.4 V. All parameters with the exception of off-state open-collector output current are measured with the active pullup connected to the sink output. For conditions shown as MIN or MAX, use the appropriate value specified under recommended operating conditions.

‡ All typical values are at V_{CC} = 5 V, T_A = 25°C, and V_I = 0.

§ Not more than one output should be shorted at a time.

NOTES: 4. This applies with the less positive receiver input grounded.

6. For SN55116, V_{ID} = -1 V

7. For SN55116, V_{ID} = 1 V



TEXAS
INSTRUMENTS

POST OFFICE BOX 655303 • DALLAS, TEXAS 75265

2-225

8961724 0098460 286

SN55116, SN75116, THRU SN75119 DIFFERENTIAL LINE TRANSCEIVERS

SLLS073B – MAY 1976 – REVISED MAY 1995

switching characteristics, $V_{CC} = 5\text{ V}$, $C_L = 30\text{ pF}$, $T_A = 25^\circ\text{C}$

receiver section

PARAMETER		TEST CONDITIONS		MIN	TYP	MAX	UNIT
t_{PLH}	Propagation delay time, low-to-high-level output	$R_L = 400\ \Omega$	See Figure 16		20	75	ns
t_{PHL}	Propagation delay time, high-to-low-level output				17	75	ns
t_{PZH}	Output enable time to high level	$R_L = 480\ \Omega$	See Figure 14		9	20	ns
t_{PZL}	Output enable time to low level	$R_L = 250\ \Omega$	See Figure 15		16	35	ns
t_{PHZ}	Output disable time from high level	$R_L = 480\ \Omega$	See Figure 14		12	30	ns
t_{PLZ}	Output disable time from low level	$R_L = 250\ \Omega$	See Figure 15		17	35	ns

TYPICAL CHARACTERISTICS


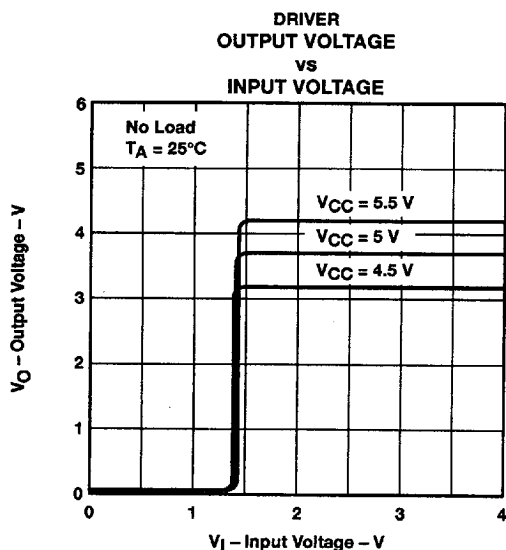


Figure 1

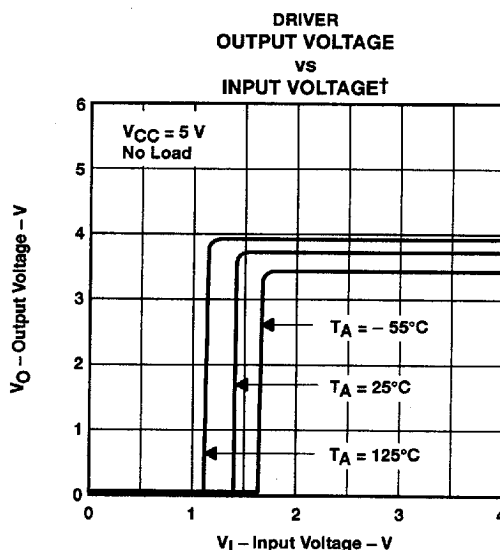

† Data for temperatures below 0°C and above 70°C are only applicable to SN55116.

Figure 2

8961724 0098461 112

 **TEXAS
INSTRUMENTS**

POST OFFICE BOX 655303 • DALLAS, TEXAS 75265

2-226

SN55116, SN75116, THRU SN75119 DIFFERENTIAL LINE TRANSCEIVERS

SLLS073B - MAY 1976 - REVISED MAY 1995

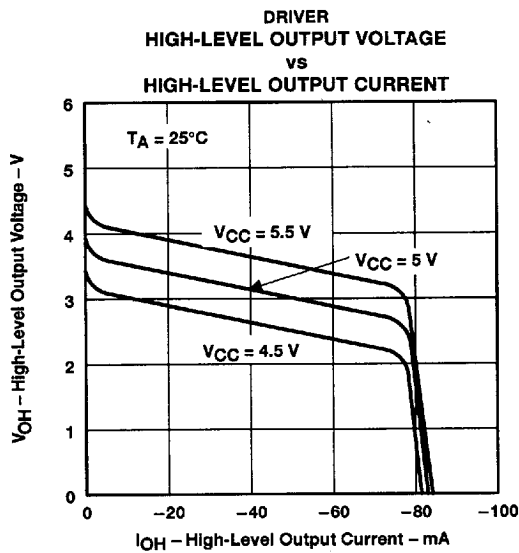


Figure 3

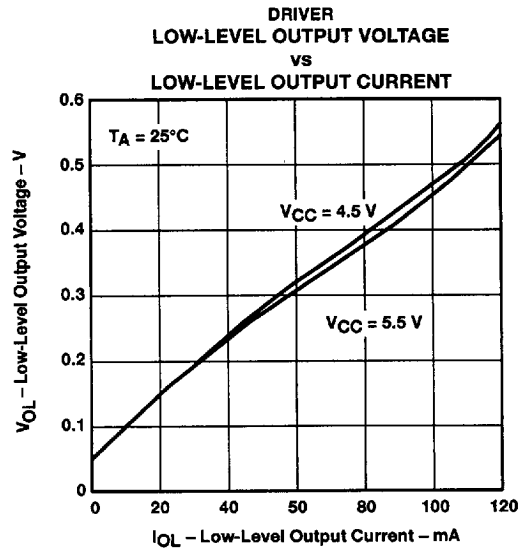


Figure 4

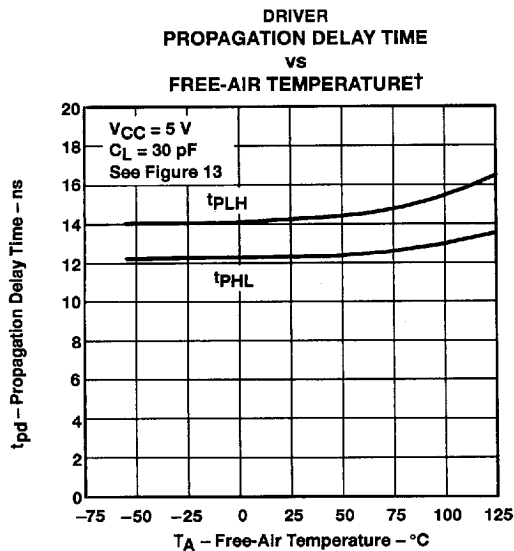


Figure 5

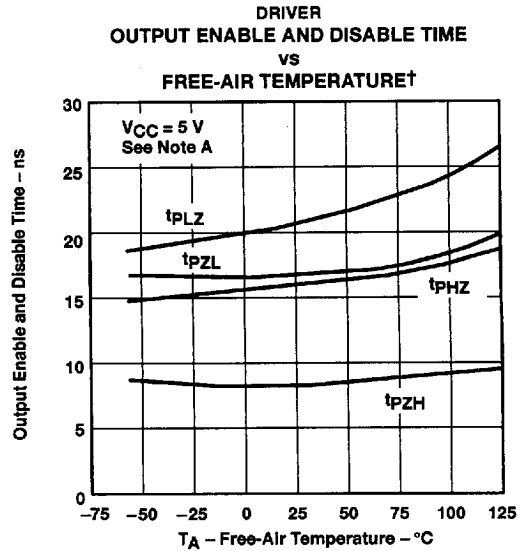


Figure 6

† Data for temperatures below 0°C and above 70°C are only applicable to SN55116.

NOTE A: For t_{PZH} and t_{PHZ} : $R_L = 180 \Omega$, see Figure 14. For t_{PZL} and t_{PLZ} : $R_L = 250 \Omega$, see Figure 15.



**TEXAS
INSTRUMENTS**

POST OFFICE BOX 655303 • DALLAS, TEXAS 75265

2-227

SN55116, SN75116, THRU SN75119 DIFFERENTIAL LINE TRANSCEIVERS

SLLS073B - MAY 1976 - REVISED MAY 1995

TYPICAL CHARACTERISTICS

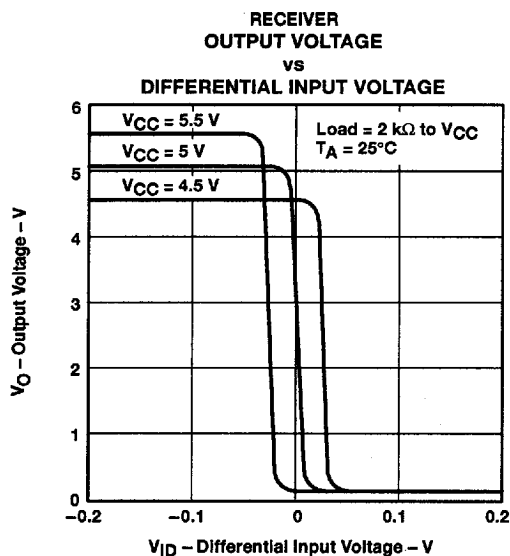


Figure 7

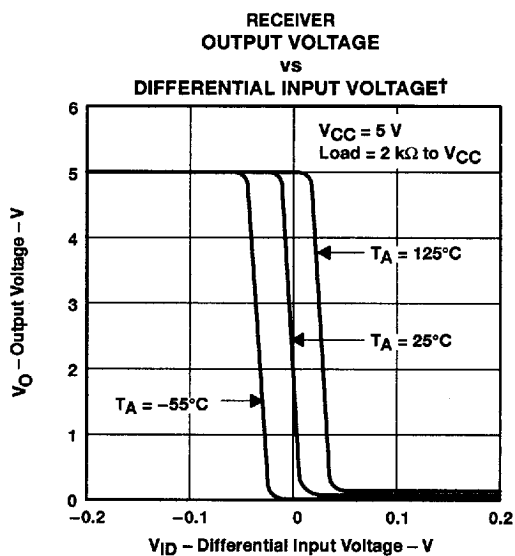


Figure 8

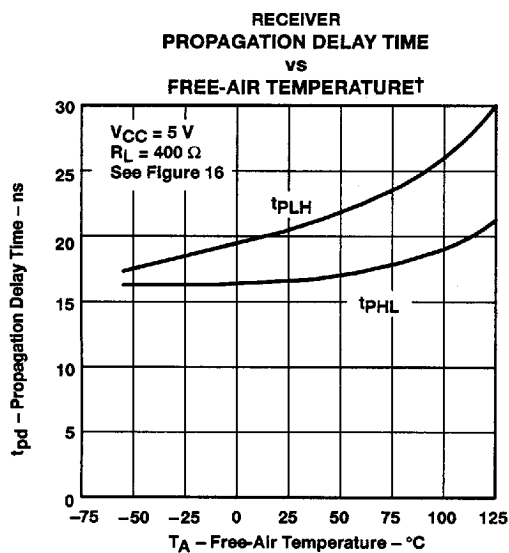


Figure 9

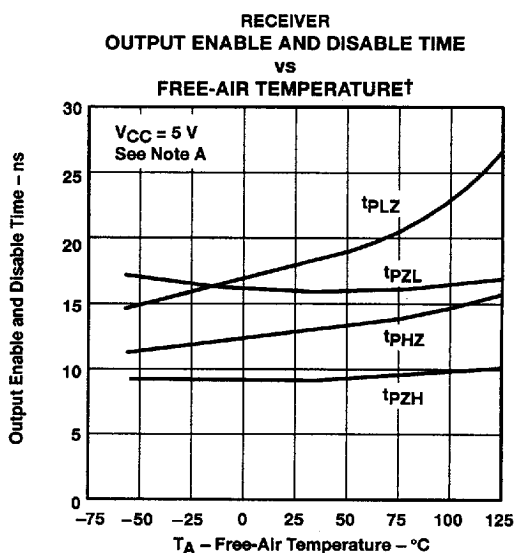


Figure 10

† Data for temperatures below 0°C and above 70°C are only applicable to SN55116.

NOTE A: For t_{PZH} and t_{PHZ} : $R_L = 480\ \Omega$, see Figure 14. For t_{PZL} and t_{PLZ} : $R_L = 250\ \Omega$, see Figure 15.

8961724 0098463 T95

**TEXAS
INSTRUMENTS**

POST OFFICE BOX 655303 • DALLAS, TEXAS 75265

SN55116, SN75116, THRU SN75119 DIFFERENTIAL LINE TRANSCEIVERS

SLLS073B - MAY 1976 - REVISED MAY 1995

TYPICAL CHARACTERISTICS


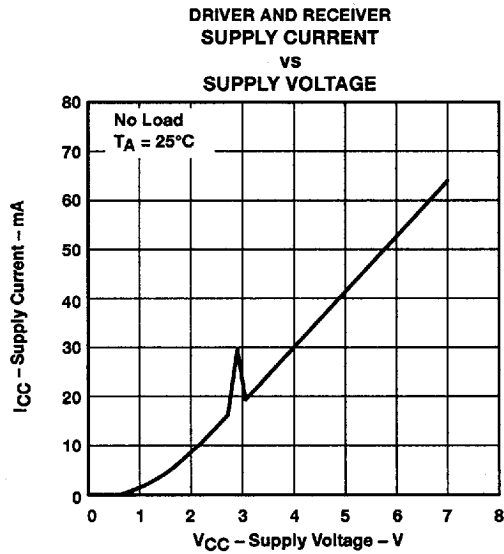


Figure 11



† Data for temperatures below 0°C and above 70°C are only applicable to SN55116.

Figure 12

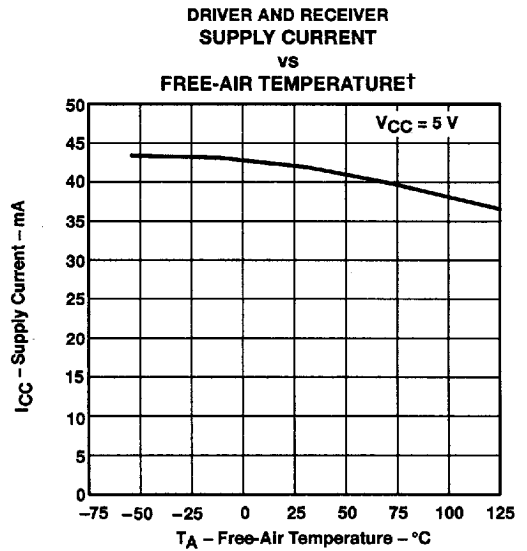

POST OFFICE BOX 655303 • DALLAS, TEXAS 75265

8961724 0098464 921

2-229

SN55116, SN75116, THRU SN75119 DIFFERENTIAL LINE TRANSCEIVERS

SLLS073B - MAY 1976 - REVISED MAY 1995

PARAMETER MEASUREMENT INFORMATION

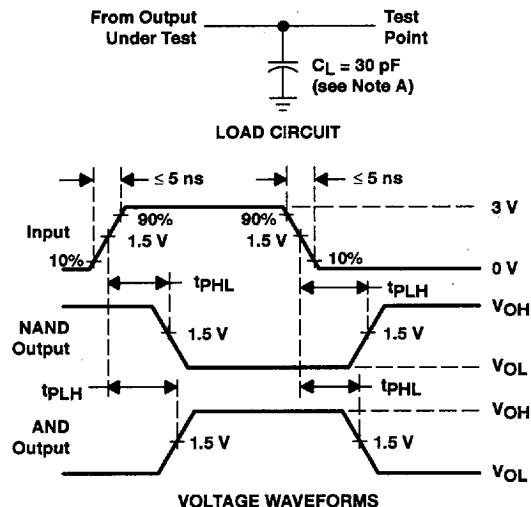


Figure 13. t_{PLH} and t_{PHL} (drivers only)

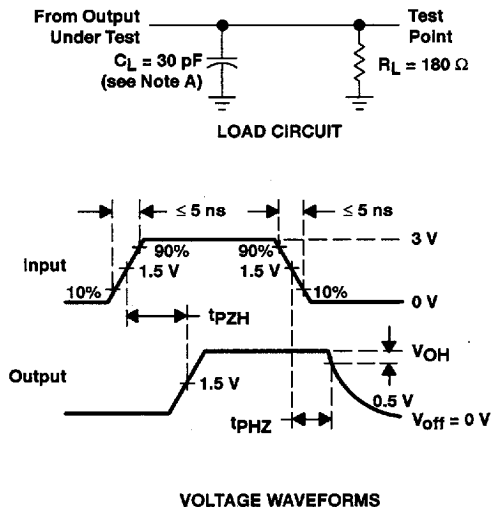


Figure 14. t_{pZH} and t_{pHZ}

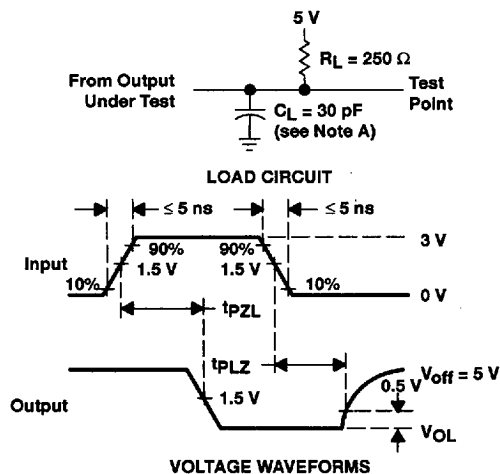


Figure 15. t_{pZL} and t_{PLZ}
($'118$ and $'119$ receivers only)

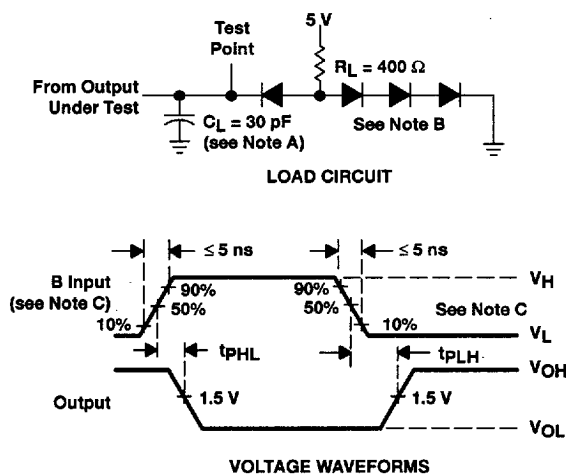


Figure 16. t_{PLH} and t_{PHL} (receivers only)

- NOTES: A. C_L includes probe and jig capacitance.
B. All diodes are 1N3064 or equivalent.
C. For $'116$ and SN75118, $V_H = 3$ V, $V_L = -3$ V, the A input is at 0 V.
For SN75117 and SN75119, $V_H = 3$ V, $V_L = 0$, the A input is at 1.5 V.
D. When testing the $'116$ and SN75118 receiver sections, the response-time control and the termination resistor pins are left open.

8961724 0098465 868

**TEXAS
INSTRUMENTS**

POST OFFICE BOX 655303 • DALLAS, TEXAS 75265