⚠Note • This PDF catalog is downloaded from the website of Murata Manufacturing co., ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued without advance notice. Please check with our sales representatives or product engineers before ordering.
• This PDF catalog has only typical specifications because there is no space for detailed specifications. Therefore, please approve our product specifications or transact the approval sheet for product specifications before ordering.

C02E.pdf
10.12.20

Chip Monolithic Ceramic Capacitors

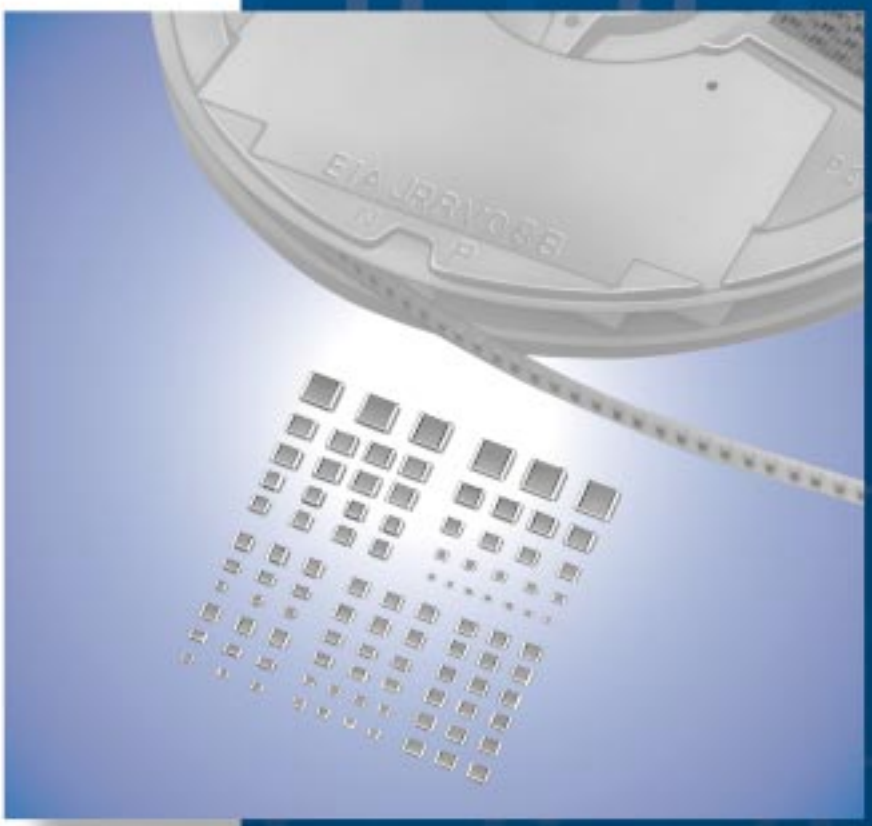

Innovator in Electronics

Murata Manufacturing Co., Ltd.

Cat.No.C02E-16

⚠Note • This PDF catalog is downloaded from the website of Murata Manufacturing co., ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued without advance notice. Please check with our sales representatives or product engineers before ordering.
• This PDF catalog has only typical specifications because there is no space for detailed specifications. Therefore, please approve our product specifications or transact the approval sheet for product specifications before ordering.

Part Numbering

Chip Monolithic Ceramic Capacitors

(Part Number) GR M 18 8 B1 1H 102 K A01 D
❶ ❷ ❸ ❹ ❺ ❻ ❼ ❽ ❾ ❿

❶Product ID
❷Series

Product ID	Code	Series
GR	J	Soft Termination Type
	M	Tin Plated Layer
	4	Only for Information Devices / Tip & Ring
	7	Only for Camera Flash Circuit
GQ	M	High Frequency for Flow/Reflow Soldering
GM	A	Monolithic Microchip
	D	For Bonding
GN	M	Capacitor Array
LL	L	Low ESL Type
	R	Controlled ESR Low ESL Type
	A	8-termination Low ESL Type
	M	10-termination Low ESL Type
GJ	M	High Frequency Low Loss Type
GA	2	For AC250V (r.m.s.)
	3	Safety Standard Certified Type

❸Dimensions (L×W)

Code	Dimensions (L×W)	EIA
02	0.4×0.2mm	01005
03	0.6×0.3mm	0201
05	0.5×0.5mm	0202
08	0.8×0.8mm	0303
0D	0.38×0.38mm	015015
0M	0.9×0.6mm	0302
15	1.0×0.5mm	0402
18	1.6×0.8mm	0603
1M	1.37×1.0mm	0504
21	2.0×1.25mm	0805
22	2.8×2.8mm	1111
31	3.2×1.6mm	1206
32	3.2×2.5mm	1210
42	4.5×2.0mm	1808
43	4.5×3.2mm	1812
52	5.7×2.8mm	2211
55	5.7×5.0mm	2220

❹Dimension (T) (Except **GNM**)

Code	Dimension (T)
2	0.2mm
3	0.3mm
5	0.5mm
6	0.6mm
7	0.7mm
8	0.8mm
9	0.85mm
A	1.0mm
B	1.25mm
C	1.6mm
D	2.0mm
E	2.5mm
F	3.2mm
M	1.15mm
N	1.35mm
Q	1.5mm
R	1.8mm
S	2.8mm
X	Depends on individual standards.

❹Elements (**GNM** Only)

Code	Elements
2	2-elements
4	4-elements

Continued on the following page.

Please check the MURATA home page (http://www.murata.com/) if you cannot find the part number in the catalog.

⚠Note • This PDF catalog is downloaded from the website of Murata Manufacturing co., ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued without advance notice. Please check with our sales representatives or product engineers before ordering.
• This PDF catalog has only typical specifications because there is no space for detailed specifications. Therefore, please approve our product specifications or transact the approval sheet for product specifications before ordering.

Continued from the preceding page.

❺Temperature Characteristics

Temperature Characteristic Codes			Temperature Characteristics			Operating Temperature Range
Code	Public STD Code		Reference Temperature	Temperature Range	Capacitance Change or Temperature Coefficient	
1X	SL *1	JIS	20°C	20 to 85°C	+350 to -1000ppm/°C	-55 to 125°C
2C	CH *1	JIS	20°C	20 to 125°C	0±60ppm/°C	-55 to 125°C
2P	PH *1	JIS	20°C	20 to 85°C	-150±60ppm/°C	-25 to 85°C
2R	RH *1	JIS	20°C	20 to 85°C	-220±60ppm/°C	-25 to 85°C
2S	SH *1	JIS	20°C	20 to 85°C	-330±60ppm/°C	-25 to 85°C
2T	TH *1	JIS	20°C	20 to 85°C	-470±60ppm/°C	-25 to 85°C
3C	CJ *1	JIS	20°C	20 to 125°C	0±120ppm/°C	-55 to 125°C
3P	PJ *1	JIS	20°C	20 to 85°C	-150±120ppm/°C	-25 to 85°C
3R	RJ *1	JIS	20°C	20 to 85°C	-220±120ppm/°C	-25 to 85°C
3S	SJ *1	JIS	20°C	20 to 85°C	-330±120ppm/°C	-25 to 85°C
3T	TJ *1	JIS	20°C	20 to 85°C	-470±120ppm/°C	-25 to 85°C
3U	UJ *1	JIS	20°C	20 to 85°C	-750±120ppm/°C	-25 to 85°C
4C	CK *1	JIS	20°C	20 to 125°C	0±250ppm/°C	-55 to 125°C
5C	C0G *1	EIA	25°C	25 to 125°C	0±30ppm/°C	-55 to 125°C
5G	X8G *1	EIA	25°C	25 to 150°C	0±30ppm/°C	-55 to 150°C
6C	C0H *1	EIA	25°C	25 to 125°C	0±60ppm/°C	-55 to 125°C
6P	P2H *1	EIA	25°C	25 to 85°C	-150±60ppm/°C	-55 to 125°C
6R	R2H *1	EIA	25°C	25 to 85°C	-220±60ppm/°C	-55 to 125°C
6S	S2H *1	EIA	25°C	25 to 85°C	-330±60ppm/°C	-55 to 125°C
6T	T2H *1	EIA	25°C	25 to 85°C	-470±60ppm/°C	-55 to 125°C
7U	U2J *1	EIA	25°C	25 to 125°C *6	-750±120ppm/°C	-55 to 125°C
B1	B *2	JIS	20°C	-25 to 85°C	±10%	-25 to 85°C
B3	B	JIS	20°C	-25 to 85°C	±10%	-25 to 85°C
C7	X7S	EIA	25°C	-55 to 125°C	±22%	-55 to 125°C
C8	X6S	EIA	25°C	-55 to 105°C	±22%	-55 to 105°C
D7	X7T	EIA	25°C	-55 to 125°C	+22, -33%	-55 to 125°C
D8	X6T	EIA	25°C	-55 to 105°C	+22, -33%	-55 to 105°C
E7	X7U	EIA	25°C	-55 to 125°C	+22, -56%	-55 to 125°C
F1	F *2	JIS	20°C	-25 to 85°C	+30, -80%	-25 to 85°C
F5	Y5V	EIA	25°C	-30 to 85°C	+22, -82%	-30 to 85°C
L8	X8L	*3	25°C	-55 to 150°C	+15, -40%	-55 to 150°C
R1	R *2	JIS	20°C	-55 to 125°C	±15%	-55 to 125°C
R3	R	JIS	20°C	-55 to 125°C	±15%	-55 to 125°C
R6	X5R	EIA	25°C	-55 to 85°C	±15%	-55 to 85°C
R7	X7R	EIA	25°C	-55 to 125°C	±15%	-55 to 125°C
R9	X8R	EIA	25°C	-55 to 150°C	±15%	-55 to 150°C
W0	-	-	25°C	-55 to 125°C	±10% *4	-55 to 125°C
					+22, -33% *5	

*1 Please refer to table for Capacitance Change under reference temperature.
*2 Capacitance change is specified with 50% rated voltage applied.
*3 Murata Temperature Characteristic Code.
*4 Apply DC350V bias.
*5 No DC bias.
*6 Rated Voltage 100Vdc max : 25 to 85°C

Continued on the following page.

⚠Note • This PDF catalog is downloaded from the website of Murata Manufacturing co., ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued without advance notice. Please check with our sales representatives or product engineers before ordering.
• This PDF catalog has only typical specifications because there is no space for detailed specifications. Therefore, please approve our product specifications or transact the approval sheet for product specifications before ordering.

Continued from the preceding page.

●Capacitance Change from each temperature

JIS Code

Murata Code	Capacitance Change from 20°C (%)					
	–55°C		–25°C		–10°C	
	Max.	Min.	Max.	Min.	Max.	Min.
1X	–	–	–	–	–	–
2C	0.82	–0.45	0.49	–0.27	0.33	–0.18
2P	–	–	1.32	0.41	0.88	0.27
2R	–	–	1.70	0.72	1.13	0.48
2S	–	–	2.30	1.22	1.54	0.81
2T	–	–	3.07	1.85	2.05	1.23
3C	1.37	–0.90	0.82	–0.54	0.55	–0.36
3P	–	–	1.65	0.14	1.10	0.09
3R	–	–	2.03	0.45	1.35	0.30
3S	–	–	2.63	0.95	1.76	0.63
3T	–	–	3.40	1.58	2.27	1.05
3U	–	–	4.94	2.84	3.29	1.89
4C	2.56	–1.88	1.54	–1.13	1.02	–0.75

EIA Code

Murata Code	Capacitance Change from 25°C (%)					
	–55°C		–30°C		–10°C	
	Max.	Min.	Max.	Min.	Max.	Min.
5C/5G	0.58	–0.24	0.40	–0.17	0.25	–0.11
6C	0.87	–0.48	0.59	–0.33	0.38	–0.21
6P	2.33	0.72	1.61	0.50	1.02	0.32
6R	3.02	1.28	2.08	0.88	1.32	0.56
6S	4.09	2.16	2.81	1.49	1.79	0.95
6T	5.46	3.28	3.75	2.26	2.39	1.44
7U	8.78	5.04	6.04	3.47	3.84	2.21

❻Rated Voltage

Code	Rated Voltage
0E	DC2.5V
0G	DC4V
0J	DC6.3V
1A	DC10V
1C	DC16V
1E	DC25V
YA	DC35V
1H	DC50V
2A	DC100V
2D	DC200V
2E	DC250V
YD	DC300V
2H	DC500V
2J	DC630V
3A	DC1kV
3D	DC2kV
3F	DC3.15kV
BB	DC350V (for Camera Flash Circuit)
E2	AC250V
GC	X1/Y2; AC250V (Safety Standard Certified Type GC)
GF	Y2, X1/Y2; AC250V (Safety Standard Certified Type GF)
GD	Y3; AC250V (Safety Standard Certified Type GD)
GB	X2; AC250V (Safety Standard Certified Type GB)

❼Capacitance

Expressed by three-digit alphanumerics. The unit is picofarad (pF). The first and second figures are significant digits, and the third figure expresses the number of zeros which follow the two numbers.If there is a decimal point, it is expressed by the capital letter "**R**." In this case, all figures are significant digits.

Ex.)

Code	Capacitance
R50	0.5pF
1R0	1.0pF
100	10pF
103	10000pF

Continued on the following page.

Please check the MURATA home page (http://www.murata.com/) if you cannot find the part number in the catalog.

⚠Note • This PDF catalog is downloaded from the website of Murata Manufacturing co., ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued without advance notice. Please check with our sales representatives or product engineers before ordering.
• This PDF catalog has only typical specifications because there is no space for detailed specifications. Therefore, please approve our product specifications or transact the approval sheet for product specifications before ordering.

Continued from the preceding page.

❽Capacitance Tolerance

Code	Capacitance Tolerance	TC	Series	Capacitance Step	
W	±0.05pF	CΔ	**GRM/GJM**	≦9.9pF	0.1pF
B	±0.1pF	CΔ	**GRM/GJM**	≦9.9pF	0.1pF
			GQM	≦1pF	0.1pF
				1.1 to 9.9pF	1pF Step and E24 Series
C	±0.25pF	CΔ	**GRM/GJM**	≦9.9pF	0.1pF
		except CΔ	**GRM**	≦5pF	* 1pF
		CΔ	**GQM**	≦1pF	0.1pF
				1.1 to 9.9pF	1pF Step and E24 Series
D	±0.5pF	CΔ	**GRM/GJM**	5.1 to 9.9pF	0.1pF
		except CΔ	**GRM**	5.1 to 9.9pF	* 1pF
		CΔ	**GQM**	5.1 to 9.9pF	1pF Step and E24 Series
G	±2%	CΔ	**GJM**	≧10pF	E12 Series
		CΔ	**GQM**	≧10pF	E24 Series
J	±5%	CΔ, SL, U2J	**GRM/GA3**	≧10pF	E12 Series
		CΔ	**GQM/GJM**	≧10pF	E24 Series
K	±10%	B, R, X7R, X5R, ZLM	**GRJ/GRM/GR7/GA3**	E6 Series	
		C0G	**GNM**	E6 Series	
		B, R, X7R, X5R, ZLM	**GR4, GMD**	E12 Series	
M	±20%	B, R, X7R, X7S	**GRM/GMA**	E6 Series	
		X5R, X7R, X7S	**GNM**	E3 Series	
		X7R	**GA2**	E3 Series	
		X5R, X7R, X7S, X6S	**LLL/LLR/LLA/LLM**	E3 Series	
Z	+80%, -20%	F, Y5V	**GRM**	E3 Series	
R	Depends on individual standards.				

***** E24 series is also available.

❾Individual Specification Code (Except **LLR**)

Expressed by three figures.

❾ESR (**LLR** Only)

Code	ESR
E01	100mΩ
E03	220mΩ
E05	470mΩ
E07	1000mΩ

❿Packaging

Code	Packaging
L	ø180mm Embossed Taping
D	ø180mm Paper Taping
E	ø180mm Paper Taping (LLL15)
K	ø330mm Embossed Taping
J	ø330mm Paper Taping
F	ø330mm Paper Taping (LLL15)
B	Bulk
C	Bulk Case
T	Bulk Tray

⚠Note • This PDF catalog is downloaded from the website of Murata Manufacturing co., ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued without advance notice. Please check with our sales representatives or product engineers before ordering.
• This PDF catalog has only typical specifications because there is no space for detailed specifications. Therefore, please approve our product specifications or transact the approval sheet for product specifications before ordering.

Chip Monolithic Ceramic Capacitors

Capacitor Array GNM Series

■ Features

1. High density mounting due to mounting space saving
2. Mounting cost saving

■ Applications

General electronic equipment

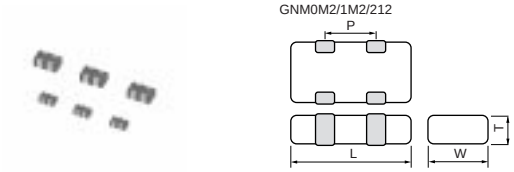

Part Number	Dimensions (mm)			
	L	W	T	P
GNM0M2	0.9 ±0.05	0.6 ±0.05	0.45 ±0.05	0.45 ±0.05
GNM1M2	1.37 ±0.15	1.0 ±0.15	0.5 +0.05/-0.10	0.64 ±0.05
			0.6 ±0.1	
			0.8 +0/-0.15	
GNM212	2.0 ±0.15	1.25 ±0.15	0.6 ±0.1	1.0 ±0.1
			0.85 ±0.1	

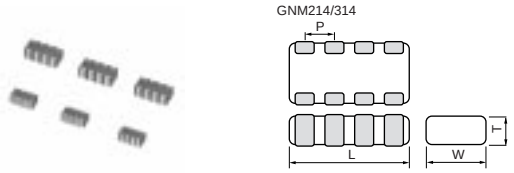

Part Number	Dimensions (mm)			
	L	W	T	P
GNM214	2.0 ±0.15	1.25 ±0.15	0.5 +0.05/-0.1	0.5 ±0.05
			0.6 ±0.1	
			0.85 ±0.1	
GNM314	3.2 ±0.15	1.6 ±0.15	0.8 ±0.1	0.8 ±0.1
			0.85 ±0.1	
			1.0 ±0.1	
			1.15 ±0.1	

⚠Note • This PDF catalog is downloaded from the website of Murata Manufacturing co., ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued without advance notice. Please check with our sales representatives or product engineers before ordering.
• This PDF catalog has only typical specifications because there is no space for detailed specifications. Therefore, please approve our product specifications or transact the approval sheet for product specifications before ordering.

Capacitance Table

Temperature Compensating Type C0G(5C) Characteristics

0.6 ex.0.6: T Dimension [mm]

Capacitance \ LxW [mm]	1.37x1.0 (**1M**) <0504>	2.0x1.25 (**21**) <0805>	3.2x1.6 (**31**) <1206>	
Number of Elements	2(**2**)	4(**4**)		
Rated Voltage [Vdc]	50 (**1H**)	50 (**1H**)	100 (**2A**)	50 (**1H**)
10pF(**100**)	**0.6**	**0.6**	**0.8**	**0.8**
15pF(**150**)	**0.6**	**0.6**	**0.8**	**0.8**
22pF(**220**)	**0.6**	**0.6**	**0.8**	**0.8**
33pF(**330**)	**0.6**	**0.6**	**0.8**	**0.8**
47pF(**470**)	**0.6**	**0.6**	**0.8**	**0.8**
68pF(**680**)	**0.6**	**0.6**	**0.8**	**0.8**
100pF(**101**)	**0.6**	**0.6**	**0.8**	**0.8**
150pF(**151**)	**0.6**	**0.6**	**0.8**	**0.8**
220pF(**221**)	**0.6**	**0.6**		**0.8**
330pF(**331**)				**0.8**

The part number code is shown in ( ) and Unit is shown in [ ]. < >: EIA [inch] Code

High Dielectric Constant Type X7R(R7)/X7S(C7) Characteristics

0.6 ex.0.6: T Dimension [mm]

Capacitance \ LxW [mm]	1.37x1.0 (**1M**) <0504>				2.0x1.25 (**21**) <0805>			3.2x1.6 (**31**) <1206>			
Number of Elements	2(**2**)				4(**4**)						
Rated Voltage [Vdc]	50 (**1H**)	25 (**1E**)	16 (**1C**)	10 (**1A**)	50 (**1H**)	25 (**1E**)	16 (**1C**)	50 (**1H**)	25 (**1E**)	16 (**1C**)	6.3 (**0J**)
470pF(**471**)					**0.6**						
1000pF(**102**)	**0.6**				**0.6**						
2200pF(**222**)		**0.6**				**0.6**					
4700pF(**472**)		**0.6**				**0.6**					
10000pF(**103**)		**0.6**				**0.6**					
22000pF(**223**)			**0.6**	**0.6**			**0.85**				
47000pF(**473**)			**0.6**	**0.6**			**0.85**	**0.85**		**1.0**	
0.10μF(**104**)			**0.6**	**0.6**			**0.85**	**0.85**	**0.85**	**1.0**	
1.0μF(**105**)											**1.15**

The part number code is shown in ( ) and Unit is shown in [ ]. < >: EIA [inch] Code

High Dielectric Constant Type X7R(R7) Characteristics-Low Profile

0.5 ex.0.5: T Dimension [mm]

Capacitance \ LxW [mm]	1.37x1.0 (**1M**) <0504>	2.0x1.25 (**21**) <0805>
Number of Elements	2(**2**)	4(**4**)
Rated Voltage [Vdc]	16 (**1C**)	16 (**1C**)
0.10μF(**104**)	**0.5**	**0.5**

The part number code is shown in ( ) and Unit is shown in [ ].
< >: EIA [inch] Code

⚠Note • This PDF catalog is downloaded from the website of Murata Manufacturing co., ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued without advance notice. Please check with our sales representatives or product engineers before ordering.
• This PDF catalog has only typical specifications because there is no space for detailed specifications. Therefore, please approve our product specifications or transact the approval sheet for product specifications before ordering.

Capacitance Table

High Dielectric Constant Type X5R(R6) Characteristics

0.6 ex.0.6: T Dimension [mm]

LxW [mm]	0.9x0.6 (**0M**) <0302>				1.37x1.0 (**1M**) <0504>					2.0x1.25 (**21**) <0805>			2.0x1.25 (**21**) <0805>		3.2x1.6 (**31**) <1206>	
Number of Elements	2(**2**)												4(**4**)			
Rated Voltage [Vdc] / Capacitance	16 (**1C**)	10 (**1A**)	6.3 (**0J**)	4 (**0G**)	50 (**1H**)	25 (**1E**)	16 (**1C**)	10 (**1A**)	6.3 (**0J**)	16 (**1C**)	10 (**1A**)	6.3 (**0J**)	10 (**1A**)	6.3 (**0J**)	16 (**1C**)	10 (**1A**)
1000pF(**102**)					**0.6**											
2200pF(**222**)						**0.6**										
4700pF(**472**)						**0.6**										
10000pF(**103**)	**0.45**	**0.45**	**0.45**			**0.6**										
22000pF(**223**)	**0.45**	**0.45**	**0.45**				**0.6**	**0.6**								
47000pF(**473**)	**0.45**	**0.45**	**0.45**				**0.6**	**0.6**								
0.10μF(**104**)	**0.45**	**0.45**	**0.45**					**0.6**								
0.22μF(**224**)							**0.8**									
0.47μF(**474**)										**0.85**						
1.0μF(**105**)				**0.45**			**0.8**	**0.8**	**0.8**	**0.85**	**0.85**		**0.85**	**0.85**	**0.85**	**0.85**
2.2μF(**225**)								**0.8**	**0.8**		**0.85**	**0.85**		**0.85**		

The part number code is shown in ( ) and Unit is shown in [ ]. < >: EIA [inch] Code

High Dielectric Constant Type X5R(R6) Characteristics-Low Profile

0.5 ex.0.5: T Dimension [mm]

LxW [mm]	1.37x1.0 (**1M**) <0504>		2.0x1.25 (**21**) <0805>
Number of Elements	2(**2**)		4(**4**)
Rated Voltage [Vdc] / Capacitance	16 (**1C**)	10 (**1A**)	10 (**1A**)
1.0μF(**105**)	**0.5**	**0.5**	**0.5**

The part number code is shown in ( ) and Unit is shown in [ ].
< >: EIA [inch] Code

⚠Note • This PDF catalog is downloaded from the website of Murata Manufacturing co., ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued without advance notice. Please check with our sales representatives or product engineers before ordering.
• This PDF catalog has only typical specifications because there is no space for detailed specifications. Therefore, please approve our product specifications or transact the approval sheet for product specifications before ordering.

Temperature Compensating Type C0G(5C) Characteristics

LxW [mm]		1.37x1.0(**1M**)<0504>	2.0x1.25(**21**)<0805>	3.2x1.6(**31**)<1206>	
Number of Elements		2(**2**)	4(**4**)		
Rated Volt. [Vdc]		50(**1H**)	50(**1H**)	100(**2A**)	50(**1H**)
Capacitance	Tolerance	Part Number			
10pF(**100**)	±10%(**K**)	**GNM1M25C1H100KD01D**	**GNM2145C1H100KD01D**	**GNM3145C2A100KD01D**	**GNM3145C1H100KD01D**
15pF(**150**)	±10%(**K**)	**GNM1M25C1H150KD01D**	**GNM2145C1H150KD01D**	**GNM3145C2A150KD01D**	**GNM3145C1H150KD01D**
22pF(**220**)	±10%(**K**)	**GNM1M25C1H220KD01D**	**GNM2145C1H220KD01D**	**GNM3145C2A220KD01D**	**GNM3145C1H220KD01D**
33pF(**330**)	±10%(**K**)	**GNM1M25C1H330KD01D**	**GNM2145C1H330KD01D**	**GNM3145C2A330KD01D**	**GNM3145C1H330KD01D**
47pF(**470**)	±10%(**K**)	**GNM1M25C1H470KD01D**	**GNM2145C1H470KD01D**	**GNM3145C2A470KD01D**	**GNM3145C1H470KD01D**
68pF(**680**)	±10%(**K**)	**GNM1M25C1H680KD01D**	**GNM2145C1H680KD01D**	**GNM3145C2A680KD01D**	**GNM3145C1H680KD01D**
100pF(**101**)	±10%(**K**)	**GNM1M25C1H101KD01D**	**GNM2145C1H101KD01D**	**GNM3145C2A101KD01D**	**GNM3145C1H101KD01D**
150pF(**151**)	±10%(**K**)	**GNM1M25C1H151KD01D**	**GNM2145C1H151KD01D**	**GNM3145C2A151KD01D**	**GNM3145C1H151KD01D**
220pF(**221**)	±10%(**K**)	**GNM1M25C1H221KD01D**	**GNM2145C1H221KD01D**		**GNM3145C1H221KD01D**
330pF(**331**)	±10%(**K**)				**GNM3145C1H331KD01D**

The part number code is shown in ( ) and Unit is shown in [ ]. < >: EIA [inch] Code

High Dielectric Constant Type X7R(R7)/X7S(C7) Characteristics

LxW [mm]		1.37x1.0(**1M**)<0504>			
Number of Elements		2(**2**)			
Rated Volt. [Vdc]		50(**1H**)	25(**1E**)	16(**1C**)	10(**1A**)
Capacitance	Tolerance	Part Number			
1000pF(**102**)	±20%(**M**)	**GNM1M2R71H102MA01D**			
2200pF(**222**)	±20%(**M**)		**GNM1M2R71E222MA01D**		
4700pF(**472**)	±20%(**M**)		**GNM1M2R71E472MA01D**		
10000pF(**103**)	±20%(**M**)		**GNM1M2R71E103MA01D**		
22000pF(**223**)	±20%(**M**)			**GNM1M2R71C223MA01D**	**GNM1M2R71A223MA01D**
47000pF(**473**)	±20%(**M**)			**GNM1M2R71C473MA01D**	**GNM1M2R71A473MA01D**
0.10μF(**104**)	±20%(**M**)			**GNM1M2R71C104MA01D**	**GNM1M2C71A104MA01D**

LxW [mm]		2.0x1.25(**21**)<0805>		
Number of Elements		4(**4**)		
Rated Volt. [Vdc]		50(**1H**)	25(**1E**)	16(**1C**)
Capacitance	Tolerance	Part Number		
470pF(**471**)	±20%(**M**)	**GNM214R71H471MA01D**		
1000pF(**102**)	±20%(**M**)	**GNM214R71H102MA01D**		
2200pF(**222**)	±20%(**M**)		**GNM214R71E222MA01D**	
4700pF(**472**)	±20%(**M**)		**GNM214R71E472MA01D**	
10000pF(**103**)	±20%(**M**)		**GNM214R71E103MA01D**	
22000pF(**223**)	±20%(**M**)			**GNM214R71C223MA01D**
47000pF(**473**)	±20%(**M**)			**GNM214R71C473MA01D**
0.10μF(**104**)	±20%(**M**)			**GNM214R71C104MA01D**

LxW [mm]		3.2x1.6(**31**)<1206>			
Number of Elements		4(**4**)			
Rated Volt. [Vdc]		50(**1H**)	25(**1E**)	16(**1C**)	6.3(**0J**)
Capacitance	Tolerance	Part Number			
47000pF(**473**)	±20%(**M**)	**GNM314R71H473MA11D**		**GNM314R71C473MA01L**	
0.10μF(**104**)	±20%(**M**)	**GNM314R71H104MA11D**	**GNM314R71E104MA11D**	**GNM314R71C104MA01L**	
1.0μF(**105**)	±20%(**M**)				**GNM314R70J105MA01L**

The part number code is shown in ( ) and Unit is shown in [ ]. < >: EIA [inch] Code
* Please refer to GNM series Specifications and Test Method (2).

(Part Number) **GN** **M** **1M** **2** **5C** **1H** **100** **K** **D01** **D**
❶ ❷ ❸ ❹ ❺ ❻ ❼ ❽ ❾ ❿

❶Product ID ❷Series ❸Dimensions (LxW) ❹Number of Elements
❺Temperature Characteristics ❻Rated Voltage ❼Capacitance
❽Capacitance Tolerance ❾Individual Specification Code ❿Packaging

Packaging Code in Part Number shows STD 180mm Reel Taping.

⚠Note • This PDF catalog is downloaded from the website of Murata Manufacturing co., ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued without advance notice. Please check with our sales representatives or product engineers before ordering.
• This PDF catalog has only typical specifications because there is no space for detailed specifications. Therefore, please approve our product specifications or transact the approval sheet for product specifications before ordering.

High Dielectric Constant Type X7R(R7) Characteristics-Low Profile

LxW [mm]		1.37x1.0(**1M**)<0504>	2.0x1.25(**21**)<0805>
Number of Elements		2(**2**)	4(**4**)
Rated Volt. [Vdc]		16(**1C**)	16(**1C**)
Capacitance	Tolerance	Part Number	
0.10μF(**104**)	±20%(**M**)	**GNM1M2R71C104MAA1D**	**GNM214R71C104MAA1D**

The part number code is shown in ( ) and Unit is shown in [ ]. < >: EIA [inch] Code

High Dielectric Constant Type X5R(R6) Characteristics

LxW [mm]		0.9x0.6(**0M**)<0302>			
Number of Elements		2(**2**)			
Rated Volt. [Vdc]		16(**1C**)	10(**1A**)	6.3(**0J**)	4(**0G**)
Capacitance	Tolerance	Part Number			
10000pF(**103**)	±20%(**M**)	**GNM0M2R61C103ME18D***	**GNM0M2R61A103ME17D***	**GNM0M2R60J103ME17D***	
22000pF(**223**)	±20%(**M**)	**GNM0M2R61C223ME18D***	**GNM0M2R61A223ME17D***	**GNM0M2R60J223ME17D***	
47000pF(**473**)	±20%(**M**)	**GNM0M2R61C473ME18D***	**GNM0M2R61A473ME17D***	**GNM0M2R60J473ME17D***	
0.10μF(**104**)	±20%(**M**)	**GNM0M2R61C104ME18D***	**GNM0M2R61A104ME17D***	**GNM0M2R60J104ME17D***	
1.0μF(**105**)	±20%(**M**)				**GNM0M2R60G105ME17D***

LxW [mm]		1.37x1.0(**1M**)<0504>		
Number of Elements		2(**2**)		
Rated Volt. [Vdc]		50(**1H**)	25(**1E**)	16(**1C**)
Capacitance	Tolerance	Part Number		
1000pF(**102**)	±20%(**M**)	**GNM1M2R61H102MA01D**		
2200pF(**222**)	±20%(**M**)		**GNM1M2R61E222MA01D**	
4700pF(**472**)	±20%(**M**)		**GNM1M2R61E472MA01D**	
10000pF(**103**)	±20%(**M**)		**GNM1M2R61E103MA01D**	
22000pF(**223**)	±20%(**M**)			**GNM1M2R61C223MA01D**
47000pF(**473**)	±20%(**M**)			**GNM1M2R61C473MA01D**
0.22μF(**224**)	±20%(**M**)			**GNM1M2R61C224ME18D***
1.0μF(**105**)	±20%(**M**)			**GNM1M2R61C105ME18D***

LxW [mm]		1.37x1.0(**1M**)<0504>	
Number of Elements		2(**2**)	
Rated Volt. [Vdc]		10(**1A**)	6.3(**0J**)
Capacitance	Tolerance	Part Number	
22000pF(**223**)	±20%(**M**)	**GNM1M2R61A223MA01D**	
47000pF(**473**)	±20%(**M**)	**GNM1M2R61A473MA01D**	
0.10μF(**104**)	±20%(**M**)	**GNM1M2R61A104MA01D**	
1.0μF(**105**)	±20%(**M**)	**GNM1M2R61A105ME17D***	**GNM1M2R60J105ME12D***
2.2μF(**225**)	±20%(**M**)	**GNM1M2R61A225ME18D***	**GNM1M2R60J225ME18D***

LxW [mm]		2.0x1.25(**21**)<0805>		
Number of Elements		2(**2**)		
Rated Volt. [Vdc]		16(**1C**)	10(**1A**)	6.3(**0J**)
Capacitance	Tolerance	Part Number		
0.47μF(**474**)	±20%(**M**)	**GNM212R61C474MA16D**		
1.0μF(**105**)	±20%(**M**)	**GNM212R61C105MA16D**	**GNM212R61A105MA13D**	
2.2μF(**225**)	±20%(**M**)		**GNM212R61A225ME16D***	**GNM212R60J225ME16D***

The part number code is shown in ( ) and Unit is shown in [ ]. < >: EIA [inch] Code
* Please refer to GNM series Specifications and Test Method (2).

(Part Number) **GN** **M** **1M** **2** **R7** **1C** **104** **M** **AA1** **D**
❶ ❷ ❸ ❹ ❺ ❻ ❼ ❽ ❾ ❿

❶Product ID ❷Series ❸Dimensions (LxW) ❹Number of Elements
❺Temperature Characteristics ❻Rated Voltage ❼Capacitance
❽Capacitance Tolerance ❾Individual Specification Code ❿Packaging

Packaging Code in Part Number shows STD 180mm Reel Taping.

⚠Note • This PDF catalog is downloaded from the website of Murata Manufacturing co., ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued without advance notice. Please check with our sales representatives or product engineers before ordering.
• This PDF catalog has only typical specifications because there is no space for detailed specifications. Therefore, please approve our product specifications or transact the approval sheet for product specifications before ordering.

High Dielectric Constant Type X5R(R6) Characteristics

LxW [mm]		2.0x1.25(**21**)<0805>	
Number of Elements		4(**4**)	
Rated Volt. [Vdc]		10(**1A**)	6.3(**0J**)
Capacitance	Tolerance	Part Number	
1.0μF(**105**)	±20%(**M**)	**GNM214R61A105ME17D***	**GNM214R60J105ME17D***
2.2μF(**225**)	±20%(**M**)		**GNM214R60J225ME18D***

LxW [mm]		3.2x1.6(**31**)<1206>	
Number of Elements		4(**4**)	
Rated Volt. [Vdc]		16(**1C**)	10(**1A**)
Capacitance	Tolerance	Part Number	
1.0μF(**105**)	±20%(**M**)	**GNM314R61C105MA15D**	**GNM314R61A105MA13D**

The part number code is shown in ( ) and Unit is shown in [ ]. < >: EIA [inch] Code
* Please refer to GNM series Specifications and Test Method (2).

High Dielectric Constant Type X5R(R6) Characteristics-Low Profile

LxW [mm]		1.37x1.0(**1M**)<0504>		2.0x1.25(**21**)<0805>
Number of Elements		2(**2**)		4(**4**)
Rated Volt. [Vdc]		16(**1C**)	10(**1A**)	10(**1A**)
Capacitance	Tolerance	Part Number		
1.0μF(**105**)	±20%(**M**)	**GNM1M2R61C105MEA2D***	**GNM1M2R61A105MEA4D***	**GNM214R61A105MEA2D***

The part number code is shown in ( ) and Unit is shown in [ ]. < >: EIA [inch] Code
* Please refer to GNM series Specifications and Test Method (2).

⚠Note • This PDF catalog is downloaded from the website of Murata Manufacturing co., ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued without advance notice. Please check with our sales representatives or product engineers before ordering.
• This PDF catalog has only typical specifications because there is no space for detailed specifications. Therefore, please approve our product specifications or transact the approval sheet for product specifications before ordering.

GNM Series Specifications and Test Methods (1)

When no "*" is added in PNs table, please refer to GNM Series Specifications and Test Methods (1).
When "*" is added in PNs table, please refer to GNM Series Specifications and Test Methods (2).

No.	Item	Specifications: Temperature Compensating Type	Specifications: High Dielectric Type	Test Method
1	Operating Temperature Range	5C: –55 to +125°C	R7, C7: –55 to +125°C R6: –55 to +85°C	
2	Rated Voltage	See the previous pages.		The rated voltage is defined as the maximum voltage that may be applied continuously to the capacitor. When AC voltage is superimposed on DC voltage, V^{P-P} or V^{O-P}, whichever is larger, should be maintained within the rated voltage range.
3	Appearance	No defects or abnormalities		Visual inspection
4	Dimensions	Within the specified dimensions		Using calipers
5	Dielectric Strength	No defects or abnormalities		No failure should be observed when 300% of the rated voltage (5C) or 250% of the rated voltage (R7) is applied between the terminations for 1 to 5 seconds, provided the charge/discharge current is less than 50mA.
6	Insulation Resistance	More than 10,000MΩ or 500Ω · F (whichever is smaller)		The insulation resistance should be measured with a DC voltage not exceeding the rated voltage at 25°C and 75%RH max. and within 2 minutes of charging.
7	Capacitance	Within the specified tolerance		The capacitance/Q/D.F. should be measured at 25°C at the frequency and voltage shown in the table. Char. / Item: 5C — Frequency: 1±0.1MHz; Voltage: 0.5 to 5Vrms Char. / Item: R7 — Frequency: 1±0.1kHz; Voltage: 1.0±0.2Vrms
8	Q/ Dissipation Factor (D.F.)	30pF min.: Q≧1000 30pF max.: Q≧400+20C C: Nominal Capacitance (pF)	Char. / 25V min. / 16V / 10V / 6.3V R7, R6, C7 / 0.025 max. / 0.035 max. / 0.035 max. / 0.05 max.	
9	Capacitance Temperature Characteristics — Capacitance Change	Within the specified tolerance (Table A)	Char. / Temp. Range / Reference Temp. / Cap. Change R7 / –55°C to +125°C / 25°C / Within ±15% R6 / –55°C to +85°C / 25°C / Within ±15% C7 / –55°C to +125°C / 25°C / Within ±22%	The capacitance change should be measured after 5 min. at each specified temperature stage. (1) Temperature Compensating Type The temperature coefficient is determined using the capacitance measured in step 3 as a reference. When cycling the temperature sequentially from steps 1 through 5, the capacitance should be within the specified tolerance for the temperature coefficient and capacitance change as in Table A. The capacitance drift is calculated by dividing the differences between the maximum and minimum measured values in the steps 1, 3 and 5 by the cap. value in step 3. Step / Temperature (°C) 1 / 25±2 2 / –55±3 (for 5C/R7/C7), –30±3 (for F5) 3 / 25±2 4 / 125±3 (for 5C/R7/C7), 85±3 (for F5) 5 / 25±2 (2) High Dielectric Constant Type The ranges of capacitance change compared with the above 25°C value over the temperature ranges shown in the table should be within the specified ranges. • Initial measurement for high dielectric constant type. Perform a heat treatment at 150+0/-10°C for one hour and then set for 24±2 hours at room temperature. Perform the initial measurement.
	Capacitance Temperature Characteristics — Temperature Coefficient	Within the specified tolerance (Table A)		
	Capacitance Temperature Characteristics — Capacitance Drift	Within ±0.2% or ±0.05pF (whichever is larger.)		
10	Adhesive Strength of Termination	No removal of the terminations or other defect should occur. GNM□□4 / GNM□□2 Solder resist Copper foil		Solder the capacitor to the test jig (glass epoxy board) shown in Fig.1 using a eutectic solder. Then apply 5N force in parallel with the test jig for 10±1 sec. The soldering should be done either with an iron or using the reflow method and should be conducted with care so that the soldering is uniform and free of defects such as heat shock. Type / a / b / c / d GNM1M2 / 0.5 / 1.6 / 0.32 / 0.32 GNM212 / 0.6 / 1.8 / 0.5 / 0.5 GNM214 / 0.6 / 2.0 / 0.25 / 0.25 GNM314 / 0.8 / 2.5 / 0.4 / 0.4 (in mm) Fig. 1

Continued on the following page.

⚠Note • This PDF catalog is downloaded from the website of Murata Manufacturing co., ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued without advance notice. Please check with our sales representatives or product engineers before ordering.
• This PDF catalog has only typical specifications because there is no space for detailed specifications. Therefore, please approve our product specifications or transact the approval sheet for product specifications before ordering.

GNM Series Specifications and Test Methods (1)

Continued from the preceding page.

When no "*" is added in PNs table, please refer to GNM Series Specifications and Test Methods (1).
When "*" is added in PNs table, please refer to GNM Series Specifications and Test Methods (2).

No.	Item		Specifications: Temperature Compensating Type	Specifications: High Dielectric Type	Test Method
11	Vibration Resistance	Appearance	No defects or abnormalities		Solder the capacitor to the test jig (glass epoxy board) in the same manner and under the same conditions as (10). The capacitor should be subjected to a simple harmonic motion having a total amplitude of 1.5mm, the frequency being varied uniformly between the approximate limits of 10 and 55Hz. The frequency range, from 10 to 55Hz and return to 10Hz, should be traversed in approximately 1 minute. This motion should be applied for a period of 2 hours in each of 3 mutually perpendicular directions (total of 6 hours).
		Capacitance	Within the specified tolerance		
		Q/D.F.	30pF min.: Q≧1000 30pF max.: Q≧400+20C C: Nominal Capacitance (pF)	Char. / 25V min. / 16V / 10V / 6.3V R7, R6, C7 / 0.025 max. / 0.035 max. / 0.035 max. / 0.05 max.	
12	Deflection	Appearance	No marking defects		Solder the capacitor on the test jig (glass epoxy board) shown in Fig. 2 using a eutectic solder. Then apply a force in the direction shown in Fig. 3 for 5±1 sec. The soldering should be done by the reflow method and should be conducted with care so that the soldering is uniform and free of defects such as heat shock.
		Capacitance Change	Within ±5% or ±0.5pF (whichever is larger)	Within ±10%	

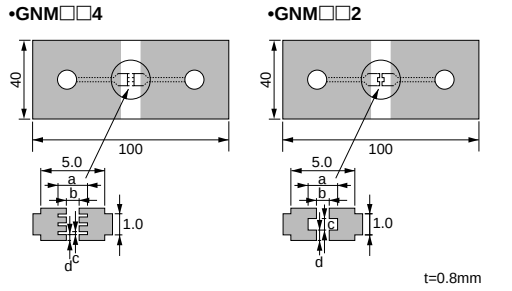

Type	a	b	c	d
GNM1M2	2.0±0.05	0.5±0.05	0.32±0.05	0.32±0.05
GNM212	2.0±0.05	0.6±0.05	0.5±0.05	0.5±0.05
GNM214	2.0±0.05	0.7±0.05	0.3±0.05	0.2±0.05
GNM314	2.5±0.05	0.8±0.05	0.4±0.05	0.4±0.05

(in mm)

Fig. 2



Fig. 3

No.	Item		Specifications: Temperature Compensating Type	Specifications: High Dielectric Type	Test Method
13	Solderability of Termination		75% of the terminations are to be soldered evenly and continuously.		Immerse the capacitor in a solution of ethanol (JIS-K-8101) and rosin (JIS-K-5902) (25% rosin in weight proportion). Preheat at 80 to 120°C for 10 to 30 seconds. After preheating, immerse in eutectic solder solution for 2±0.5 seconds at 230±5°C or Sn-3.0Ag-0.5Cu solder solution for 2±0.5 seconds at 245±5°C.
14	Resistance to Soldering Heat		The measured and observed characteristics should satisfy the specifications in the following table.		Preheat the capacitor at 120 to 150°C for 1 minute. Immerse the capacitor in a eutectic solder or Sn-3.0Ag-0.5Cu solder solution at 270±5°C for 10±0.5 seconds. Let sit at room temperature for 24±2 hours, then measure. • Initial measurement for high dielectric constant type Perform a heat treatment at 150+0/-10°C for one hour and then let sit for 24±2 hours at room temperature. Perform the initial measurement.
		Appearance	No marking defects		
		Capacitance Change	Within ±2.5% or ±0.25pF (whichever is larger)	R7, R6, C7: Within ±7.5%	
		Q/D.F.	30pF min.: Q≧1000 30pF max.: Q≧400+20C C: Nominal Capacitance (pF)	Char. / 25V min. / 16V / 10V / 6.3V R7, R6, C7 / 0.025 max. / 0.035 max. / 0.035 max. / 0.05 max.	
		I.R.	More than 10,000MΩ or 500Ω · F (whichever is smaller)		
		Dielectric Strength	No failure		

Continued on the following page.

⚠Note • This PDF catalog is downloaded from the website of Murata Manufacturing co., ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued without advance notice. Please check with our sales representatives or product engineers before ordering.
• This PDF catalog has only typical specifications because there is no space for detailed specifications. Therefore, please approve our product specifications or transact the approval sheet for product specifications before ordering.

GNM Series Specifications and Test Methods (1)

Continued from the preceding page.

When no "*" is added in PNs table, please refer to GNM Series Specifications and Test Methods (1).
When "*" is added in PNs table, please refer to GNM Series Specifications and Test Methods (2).

No.	Item		Specifications: Temperature Compensating Type	Specifications: High Dielectric Type	Test Method
15	Temperature Cycle		The measured and observed characteristics should satisfy the specifications in the following table.		Fix the capacitor to the supporting jig in the same manner and under the same conditions as (10). Perform the five cycles according to the four heat treatments listed in the following table. Let sit for 24±2 hours (temperature compensating type) or 48±4 hours (high dielectric constant type) at room temperature, then measure.
		Appearance	No marking defects		
		Capacitance Change	Within ±2.5% or ±0.25pF (whichever is larger)	R7, R6, C7: Within ±7.5%	
		Q/D.F.	30pF min.: Q≧1000 30pF max.: Q≧400+20C C:Nominal Capacitance (pF)	Char. / 25V min. / 16V / 10V / 6.3V R7, R6, C7 / 0.025 max. / 0.035 max. / 0.035 max. / 0.05 max.	
		I.R.	More than 10,000MΩ or 500Ω · F (whichever is smaller)		
		Dielectric Strength	No failure		
16	Humidity Steady State		The measured and observed characteristics should satisfy the specifications in the following table.		Set the capacitor at 40±2°C and 90 to 95% humidity for 500±12 hours. Remove and let sit for 24±2 hours at room temperature, then measure.
		Appearance	No marking defects		
		Capacitance Change	Within ±5% or ±0.5pF (whichever is larger)	R7, R6, C7: Within ±12.5%	
		Q/D.F.	30pF and over: Q≧350 10pF and over, 30pF and below: Q≧275+5C/2 10pF and below: Q≧200+10C C: Nominal Capacitance (pF)	Char. / 25V min. / 16V / 10V/6.3V R7, R6, C7 / 0.05 max. / 0.05 max. / 0.05 max.	
		I.R.	More than 1,000MΩ or 50Ω · F (whichever is smaller)		
17	Humidity Load		The measured and observed characteristics should satisfy the specifications in the following table.		Apply the rated voltage at 40±2°C and 90 to 95% humidity for 500±12 hours. Remove and let sit for 24±2 hours at room temperature, then measure. The charge/discharge current is less than 50mA.
		Appearance	No marking defects		
		Capacitance Change	Within ±7.5% or ±0.75pF (whichever is larger)	R7, R6, C7: Within ±12.5%	
		Q/D.F.	30pF and over: Q≧200 30pF and below: Q≧100+10C/3 C: Nominal Capacitance (pF)	Char. / 25V min. / 16V / 10V/6.3V R7, R6, C7 / 0.05 max. / 0.05 max. / 0.05 max.	
		I.R.	More than 500MΩ or 25Ω · F (whichever is smaller)		

Fix the capacitor to the supporting jig in the same manner and under the same conditions as (10). Perform the five cycles according to the four heat treatments listed in the following table. Let sit for 24±2 hours (temperature compensating type) or 48±4 hours (high dielectric constant type) at room temperature, then measure.

Step	1	2	3	4
Temp. (°C)	Min. Operating Temp.+0/–3	Room Temp.	Max. Operating Temp. +3/–0	Room Temp.
Time (min.)	30±3	2 to 3	30±3	2 to 3

• Initial measurement for high dielectric constant type
Perform a heat treatment at 150+0/-10°C for one hour and then let sit for 24±2 hours at room temperature.
Perform the initial measurement.

Continued on the following page.

⚠Note • This PDF catalog is downloaded from the website of Murata Manufacturing co., ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued without advance notice. Please check with our sales representatives or product engineers before ordering.
• This PDF catalog has only typical specifications because there is no space for detailed specifications. Therefore, please approve our product specifications or transact the approval sheet for product specifications before ordering.

GNM Series Specifications and Test Methods (1)

Continued from the preceding page.

When no "*" is added in PNs table, please refer to GNM Series Specifications and Test Methods (1).
When "*" is added in PNs table, please refer to GNM Series Specifications and Test Methods (2).

No.	Item		Specifications: Temperature Compensating Type	Specifications: High Dielectric Type	Test Method
18	High Temperature Load		The measured and observed characteristics should satisfy the specifications in the following table.		Apply 200% of the rated voltage for 1000±12 hours at the maximum operating temperature ±3°C. Let sit for 24±2 hours at room temperature, then measure. The charge/discharge current is less than 50mA. • Initial measurement for high dielectric constant type. Apply 200% of the rated DC voltage for one hour at the maximum operating temperature ±3°C. Remove and let sit for 24±2 hours at room temperature. Perform initial measurement.
		Appearance	No marking defects		
		Capacitance Change	Within ±3% or ±0.3pF (whichever is larger)	R7, R6, C7: Within ±12.5%	
		Q/D.F.	30pF and over: Q≧350 10pF and over, 30pF and below: Q≧275+5C/2 10pF and below: Q≧200+10C C: Nominal Capacitance (pF)	Char. / 25V min. / 16V / 10V/6.3V R7, R6, C7 / 0.04 max. / 0.05 max. / 0.05 max.	
		I.R.	More than 1,000MΩ or 50Ω · F (whichever is smaller)		

Table A

Char.	Nominal Values (ppm/°C) *1	Capacitance Change from 25°C (%)					
		–55°C		–30°C		–10°C	
		Max.	Min.	Max.	Min.	Max.	Min.
5C	0±30	0.58	–0.24	0.40	–0.17	0.25	–0.11

*1: Nominal values denote the temperature coefficient within a range of 25 to 125°C.

⚠Note • This PDF catalog is downloaded from the website of Murata Manufacturing co., ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued without advance notice. Please check with our sales representatives or product engineers before ordering.
• This PDF catalog has only typical specifications because there is no space for detailed specifications. Therefore, please approve our product specifications or transact the approval sheet for product specifications before ordering.

GNM Series Specifications and Test Methods (2)

When no "*" is added in PNs table, please refer to GNM Series Specifications and Test Methods (1).
When "*" is added in PNs table, please refer to GNM Series Specifications and Test Methods (2).

No.	Item	Specifications	Test Method
1	Operating Temperature Range	R6: –55°C to +85°C	
2	Rated Voltage	See the previous pages.	The rated voltage is defined as the maximum voltage that may be applied continuously to the capacitor. When AC voltage is superimposed on DC voltage, V^{P-P} or V^{O-P}, whichever is larger, should be maintained within the rated voltage range.
3	Appearance	No defects or abnormalities	Visual inspection
4	Dimensions	Within the specified dimension	Using calipers
5	Dielectric Strength	No defects or abnormalities	No failure should be observed when 250% of the rated voltage is applied between the terminations for 1 to 5 seconds, provided the charge/discharge current is less than 50mA.
6	Insulation Resistance	50Ω · F min.	The insulation resistance should be measured with a DC voltage not exceeding the rated voltage at 25°C and 75%RH max. and within 1 minute of charging.
7	Capacitance	Within the specified tolerance	The capacitance/D.F. should be measured at 25°C at the frequency and voltage shown in the table. Nominal Capacitance / Measuring Frequency / Measuring Voltage C≦10μF *1 (10V min.) / 1±0.1kHz / 1.0±0.2Vrms C≦10μF *2 (6.3V max.) / 1±0.1kHz / 0.5±0.1Vrms *1For items in Table1 / 1±0.1kHz / 0.5±0.1Vrms *2For items in Table2 / 1±0.1kHz / 1.0±0.1Vrms Table 1 GNM0M2 R6 1A 104 GNM0M2 R6 1C 104 GNM1M2 R6 1A 105/225 GNM1M2 R6 1C 224/105 Table 2 GNM0M2 R6 0J 103/223/473 GNM212 R6 0J 225 GNM214 R6 0J 105
8	Dissipation Factor (D.F.)	0.1 max.*3 Table 3 GNM0M2 R6 103/223/473/104 GNM1M2 R6 0J 105/225 GNM1M2 R6 1A 105MEA4 GNM1M2 R6 1A 225 GNM212 R6 0J 225 GNM212 R6 1A 225 GNM214 R6 0J 225 *3 However 0.125 max. for Table 3 items.	
9	Capacitance Temperature Characteristics	Char. / Temp. Range / Reference Temp. / Cap. Change R6 / –55 to +85°C / 25°C / Within ±15%	The capacitance change should be measured after 5 min.at each specified temperature stage. Step / Temperature (°C) 1 / 25±2 2 / –55±3 3 / 25±2 4 / 85±3 5 / 25±2 The ranges of capacitance change compared with the 25°C value over the temperature ranges shown in the table should be within the specified ranges. • Initial measurement for high dielectric constant type. Perform a heat treatment at 150+0/-10°C for one hour and then set for 24±2 hours at room temperature. Perform the initial measurement.
10	Adhesive Strength of Termination	No removal of the terminations or other defects should occur. GNM□□4 / GNM□□2 Solder resist Copper foil Fig. 1	Solder the capacitor to the test jig (glass epoxy board) shown in Fig. 1 using a eutectic solder. Then apply 5N (GNM0M2: 2N) force in parallel with the test jig for 10±1 sec. The soldering should be done either with an iron or using the reflow method and should be conducted with care so that the soldering is uniform and free of defects such as heat shock. Type / a / b / c / d GNM0M2 / 0.2 / 0.96 / 0.25 / 0.2 GNM1M2 / 0.5 / 1.6 / 0.32 / 0.32 GNM212 / 0.6 / 1.8 / 0.5 / 0.5 GNM214 / 0.6 / 2.0 / 0.25 / 0.25 GNM314 / 0.8 / 2.5 / 0.4 / 0.4 (in mm)
11	Vibration — Appearance	No defects or abnormalities	Solder the capacitor to the test jig (glass epoxy board) in the same manner and under the same conditions as (10). The capacitor should be subjected to a simple harmonic motion having a total amplitude of 1.5mm, the frequency being varied uniformly between the approximate limits of 10 and 55Hz. The frequency range, from 10 to 55Hz and return to 10Hz, should be traversed in approximately 1 minute. This motion should be applied for a period of 2 hours in each of 3 mutually perpendicular directions (total of 6 hours).
	Capacitance	Within the specified tolerance	
	D.F.	0.1 max.*3 *3 However 0.125 max. for Table 3 items.	

Continued on the following page.

⚠Note • This PDF catalog is downloaded from the website of Murata Manufacturing co., ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued without advance notice. Please check with our sales representatives or product engineers before ordering.
• This PDF catalog has only typical specifications because there is no space for detailed specifications. Therefore, please approve our product specifications or transact the approval sheet for product specifications before ordering.

GNM Series Specifications and Test Methods (2)

Continued from the preceding page.

When no "*" is added in PNs table, please refer to GNM Series Specifications and Test Methods (1).
When "*" is added in PNs table, please refer to GNM Series Specifications and Test Methods (2).

No.	Item		Specifications	Test Method
12	Deflection	Appearance	No marking defects	Solder the capacitor to the test jig (glass epoxy board) shown in Fig. 2 using a eutectic solder. Then apply a force in the direction shown in Fig. 3. The soldering should be done by the reflow method and should be conducted with care so that the soldering is uniform and free of defects such as heat shock.
		Capacitance Change	Within ±10%	
			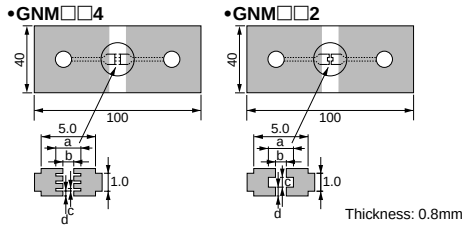 (in mm) Fig. 2	 Fig. 3
13	Solderability of Termination		75% of the terminations are to be soldered evenly and continuously.	Immerse the capacitor in a solution of ethanol (JIS-K-8101) and rosin (JIS-K-5902) (25% rosin in weight proportion). Preheat at 80 to 120°C for 10 to 30 seconds. After preheating, immerse in eutectic solder solution for 2±0.5 seconds at 230±5°C or Sn-3.0Ag-0.5Cu solder solution for 2±0.5 seconds at 245±5°C.
14	Resistance to Soldering Heat	Appearance	No marking defects	Preheat the capacitor at 120 to 150°C for 1 minute. Immerse the capacitor in a eutectic solder or Sn-3.0Ag-0.5Cu solder solution at 270±5°C for 10±0.5 seconds. Let sit at room temperature for 24±2 hours, then measure. • Initial measurement Perform a heat treatment at 150 +0/-10°C for one hour and then let sit for 24±2 hours at room temperature. Perform the initial measurement.
		Capacitance Change	R6*4: Within ±7.5% *4 GNM0M2R60G105: Within +15/-7.5%	
		D.F.	0.1 max. *3 *3 However 0.125 max. for Table 3 items.	
		I.R.	50Ω · F min.	
		Dielectric Strength	No failure	
15	Temperature Cycle	Appearance	No marking defects	Fix the capacitor to the supporting jig in the same manner and under the same conditions as (10). Perform the five cycles according to the four heat treatments listed in the following table. Let sit for 24±2 hours at room temperature, then measure. Step: 1 — Temp. (°C): Min. Operating Temp. — Time (min.): 30±3 Step: 2 — Temp. (°C): Room Temp. — Time (min.): 2 to 3 Step: 3 — Temp. (°C): Min. Operating Temp. — Time (min.): 30±3 Step: 4 — Temp. (°C): Room Temp. — Time (min.): 2 to 3 • Initial measurement Perform a heat treatment at 150 +0/-10 °C for one hour and then let sit for 24±2 hours at room temperature. Perform the initial measurement.
		Capacitance Change	R6*5: Within ±12.5% *5 GNM0M2R60G105, GNM0M2R60J103/223/473/104, GNM0M2R61A103/223/473/104, GNM0M2R61C103/223/473/104, GNM1M2R61A105: Within ±15%	
		D.F.	0.1 max. *3 *3 However 0.125 max. for Table 3 items.	
		I.R.	50Ω · F min.	
		Dielectric Strength	No failure	
16	High Temperature High Humidity (Steady)	Appearance	No marking defects	Apply the rated voltage at 40±2°C and 90 to 95% humidity for 500±12 hours. The charge/discharge current is less than 50mA. • Initial measurement Perform a heat treatment at 150 +0/-10°C for one hour and then let sit for 24±2 hours at room temperature. Perform the initial measurement. • Measurement after test Perform a heat treatment at 150 +0/-10°C for one hour and then let sit for 24±2 hours at room temperature, then measure.
		Capacitance Change	R6: Within ±12.5%	
		D.F.	0.2 max.	
		I.R.	12.5Ω · F min.	
17	Durability	Appearance	No marking defects	Apply 150% (GNM1M2R61A225/1C105: 125% of the rated voltage) of the rated voltage for 1000±12 hours at the maximum operating temperature ±3°C. Let sit for 24±2 hours at room temperature, then measure. The charge/discharge current is less than 50mA. • Initial measurement Perform a heat treatment at 150 +0/-10°C for one hour and then let sit for 24±2 hours at room temperature. Perform the initial measurement. • Measurement after test Perform a heat treatment at 150 +0/-10°C for one hour and then let sit for 24±2 hours at room temperature, then measure.
		Capacitance Change	R6: Within ±12.5%	
		D.F.	0.2 max.	
		I.R.	25Ω · F min.	

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Murata:

GNM1M2R60J105ME12D GNM1M2R61A104MA01D GNM1M2R61A105ME14D GNM1M2R71C223MA01D GNM1M2R71C473MA01D GNM212R61C105MA16D GNM214R71C104MA01D GNM214R71E103MA01D GNM214R71H102MA01D GNM3145C1H100JD01D GNM3145C1H101JD01D GNM3145C1H101KD01D GNM3145C1H120JD01D GNM3145C1H120KD01D GNM3145C1H121JD01D GNM3145C1H121KD01D GNM3145C1H150JD01D GNM3145C1H150KD01D GNM3145C1H151JD01D GNM3145C1H151KD01D GNM3145C1H180JD01D GNM3145C1H180KD01D GNM314F51C104ZD01D GNM314F51C154ZD01D GNM314F51C683ZD01D GNM314F51H223ZD01D GNM314F51H333ZD01D GNM314F51H473ZD01D GNM314F52A222ZD01D GNM314F52A332ZD01D GNM314F52A472ZD01D GNM314R71C104KA01L GNM314R71C104MA01K GNM314R71C104MA01L GNM314R71C223KD01D GNM314R71C223MD01D GNM314R71C333KD01D GNM314R71C333MD01D GNM314R71C393KD01D GNM314R71C473MA01K GNM314R71C473MA01L GNM314R71E183KD01D GNM314R71H102KD01D GNM314R71H102MD01D GNM314R71H103KD01D GNM314R71H103MD01D GNM314R71H152KD01D GNM3145C2A180JD01D GNM3145C2A180KD01D GNM3145C2A220JD01D GNM3145C2A220KD01D GNM3145C2A270JD01D GNM3145C2A270KD01D GNM3145C2A330JD01D GNM3145C2A330KD01D GNM3145C2A390JD01D GNM3145C2A390KD01D GNM3145C2A470JD01D GNM3145C2A470KD01D GNM3145C2A560JD01D GNM3145C2A560KD01D GNM3145C2A680JD01D GNM3145C2A680KD01D GNM3145C2A820JD01D GNM3145C2A820KD01D GNM3145C1H181JD01D GNM3145C1H181KD01D GNM3145C1H220JD01D GNM3145C1H220KD01D GNM3145C1H221JD01D GNM3145C1H221KD01D GNM3145C1H270JD01D GNM3145C1H270KD01D GNM3145C1H271JD01D GNM3145C1H271KD01D GNM3145C1H330JD01D GNM3145C1H331JD01D GNM3145C1H331KD01D GNM3145C1H390JD01D GNM3145C1H470JD01D GNM3145C1H470KD01J GNM3145C1H560JD01D GNM3145C1H560KD01D GNM3145C1H680JD01D GNM3145C1H680KD01D GNM3145C1H820JD01D GNM3145C1H820KD01D GNM3145C2A100JD01D GNM3145C2A101JD01D GNM3145C2A101KD01D GNM3145C2A120JD01D GNM3145C2A120KD01D GNM3145C2A121JD01D GNM3145C2A121KD01D GNM3145C2A150JD01D GNM3145C2A150KD01D GNM3145C2A151JD01D GNM3145C2A151KD01D GNM314R72A152KD01D GNM314R72A152MD01D