




Models 6747, 6748
BNC (F) PCB Mount Straight, Right Angle – 75 Ω



Model 6747 BNC (F) PCB Mount Straight



Model 6748 BNC (F) PCB Mount Right Angle

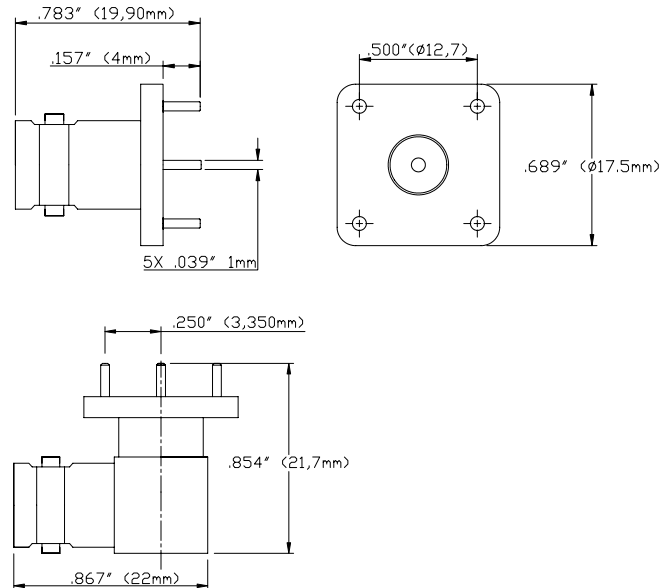

Use Pomona
PCB mount BNC's for secure
board attachment

Features

- PCB straight mount design or right angle mount design.
- Precision machined. Gold plated contacts. PTFE (**not delrin**).

Materials

- Body and PCB mount pins made from precision machined high quality brass (not die cast).
- Female center contacts are gold plated heat-treated beryllium copper.
- Pin Socket is gold over copper alloy.

Ordering Information

Model: 6747 BNC (F) PCB Mount Straight,
6748 BNC (F) PCB Mount Right Angle.

Specifications

Nominal impedance	75 Ω
Frequency	0-3 GHz
VSWR	1.10 max. 0-1 GHz 1.35 max. 1-3 GHz
Center contact resistance	1.5 mΩ
Insulation resistance	5000 MΩ
Number of insertions (BNC)	500
Ratings: Voltage: 500 Vrms Operating temperature: -85 °F to +131 °F (-65 °C to +155 °C) Max.	

USA: Sales: 800-490-2361 Technical Support: 800-241-2060 Fax: 888-403-3360

Europe: 31-(0) 40 2675 150 International: 425-446-5500

e-mail: technicalsupport@pomonatest.com

Where to Buy: www.pomonaelectronics.com

All dimensions are in inches. Tolerances (except noted): .xx = ±.02" (.51 mm), .xxx = ±.005" (.127 mm). All specifications are to the latest revisions. Specifications are subject to change without notice. Registered trademarks are the property of their respective companies.