
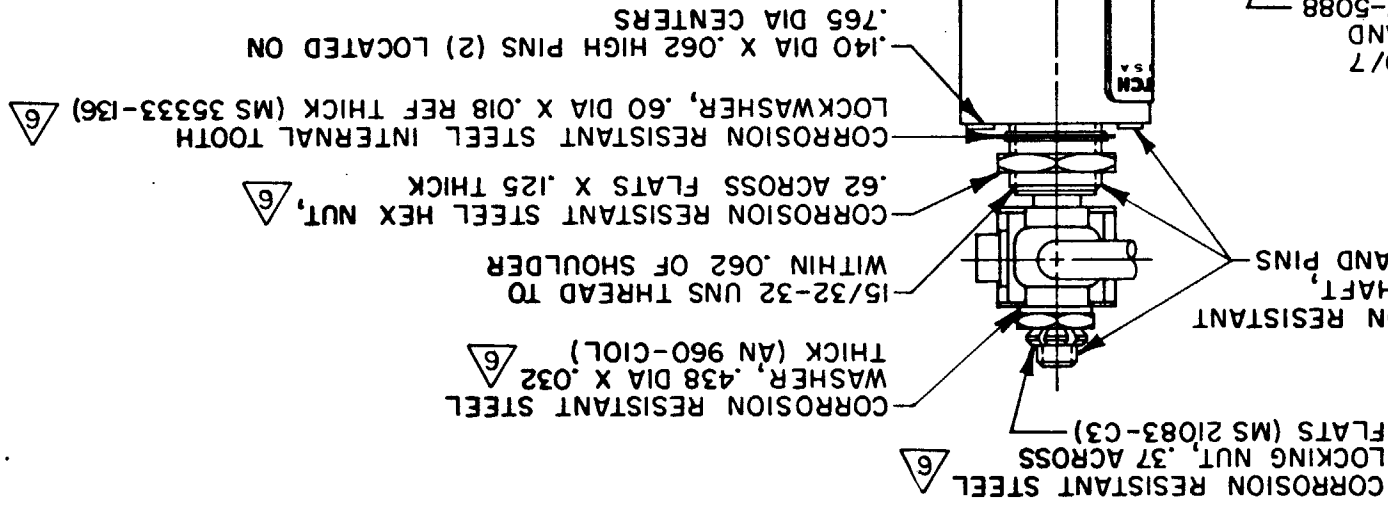



FED. MFG. CODE 91929

41EN13-6
CATALOG LISTING



- 6 HARDWARE MAY BE PACKAGED UNASSEMBLED PER MIL-S-8805

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.		 THIRD ANGLE PROJECTION		ELECTRICAL DATA		CHARACTERISTICS		OPERATING TORQUE — — — 3 IN LB MAX		PRETRAVEL DIFFERENTIAL TRAVEL OVERTRAVEL FREE POSITION	
DO NOT SCALE PRINT		TOLERANCES APPLY TO DESIGN UNITS, CONVERSIONS ARE ONLY FOR REFERENCE. UNLESS NOTED, TOLERANCES ARE ±		CONTACT ARRANGEMENT S P D T (2)		LOAD 28 VDC		MOTOR 4		SEE DETAIL	
SCALE FULL		NO PLACES X 1/64 ONE PLACES X 0.0106 THREE PLACES X, XX 0.15/.005		ANGLES NO PLACES X 1/64 ONE PLACES X 0.0106 THREE PLACES X, XX 0.15/.005		DESIGN UNITS ☐ SI METRIC ☒ US CUSTOMARY		RAY MATERIAL—COMMERCIAL STANDARD MICRO SWITCH STANDARDS APPLY DIMENSIONS ARE TO BE MET BEFORE PROTECTIVE COATINGS ARE APPLIED		WEIGHT 8.0 OZ MAX 2.4	

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Honeywell:](#)

[41EN13-6](#)